

ROPE TRICK

PRODUCT FACT SHEET



ROPE TRICK


DESIGN BY STEFAN DIEZ, 2015

With its high-quality and progressive design, Rope Trick has been selected for inclusion in MoMA's permanent collection of design objects. Its innovative construction integrates LED technology within a dynamic new tailored form, and is made from a range of modern materials, including an internal plastic skeleton and woven PET for the light's arm, molded ABS for the base, and a specially designed aluminium LED module for dissipating heat. The acrylic shade can slide along the neck of the light in a flexible way. This allows diffused light to be directed to different places in a room, producing a range of effects from a low-level ambient light to full brightness. The dimmer with memory adds to the sense that this design is at the vanguard of lighting technology.

HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A contemporary floor lamp archetype with an innovative means of adjustment.
- CE approved.
- Integrating both up and down light functionality.
- Integrated LED light source ensuring a life span of at least 25,000 hours of use.
- Stepless touch dimmer.
- Suitable for both private and office environments.
- Qualified for contract use.
- For indoor use only.

DIMENSIONS



HEIGHT / 170 CM / 66.9"

LENGTH / 33 CM / 13"

WIDTH / 18 CM / 7.09"

MATERIALS

LAMP BODY
Woven PET, steel, aluminium,
polypropylene.







LAMP SHADE
Polypropylene.

LAMP BASE
ABS cover, internal cast iron
counter weight.

CORD
Silicone.

COLOUR & FINISH

Please note that the colour codes are indicative.

	ROPE	BEIGE	YELLOW
SHADE / BASE			
DARK GREY RAL 7016			

TECHNICAL SPECIFICATIONS


LIGHT SOURCE	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
Integrated LED	10W	Yes	220-240V AC at 50-60Hz UK/EU plug mounted adapter	250 cm	Stepless touch dimmer

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN)	CRI (1-100)
410lm	3000k, warm white	85

*Photometrics and the specification shown is taken using the integrated LED bulb fitted in the production luminaire.

PHOTOMETRICS

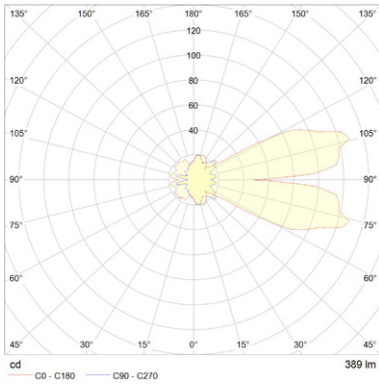

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following european EN / IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[LINK TO IMAGE BANK](#)