

BuzziCube Flat

Product Specification Sheet

This document contains technical information about the BuzziCube Flat Solo, Duo, Trio, Quatro, L Right, L Left, T



www.buzzi.space



Sound absorbing pouf

The BuzziCube Flat makes sitting a pleasure for your eyes and your bottom. Upholstered with soft foam and Covered by a variety of BuzziSpace fabrics, it is bound to steal the show in any interior!

Design by BuzziSpace Studio

General

- 🛋 BuzziCube Flat Solo, Duo, Trio, Quatro, L Right, L Left, T
Filling: Foam SG35,5
- 🌲 Upholstered in: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Tonus Meadow, Memory 2, Matrix
- ☁ Dry usage
- 🔧 Assembled

Acoustics



Absorption



Diffusion

Content

Configurations	3
Components	4
Fabrics	5
Dimensions	7
Acoustics	8

Configurations


BuzziCube Flat

-  Solo | Duo | Trio | Quatro | L Right | L Left | T
 Flat
 Bottom in antiskid, wood or with wheels (wheels only for Solo)
-  Upholstery in Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Tonus Meadow, Memory 2, Matrix


			Antiskid	Wood	Wheels (only for Solo)
	Solo:	L 46 cm	W 46 cm	H 47 cm	H 50 cm
		L 18.11"	W 18.11"	H 18.50"	H 19.69"
	Duo:	L 92 cm	W 46 cm	H 47 cm	H 50 cm
		L 36.22"	W 18.11"	H 18.50"	H 19.69"
	Trio:	L 138 cm	W 46 cm	H 47 cm	H 50 cm
		L 54.33"	W 18.11"	H 18.50"	H 19.69"
	Quatro:	L 184 cm	W 46 cm	H 47 cm	H 50 cm
		L 72.44"	W 18.11"	H 18.50"	H 19.69"
	L Left Right:	L 138 cm	W 92 cm	H 47cm	H 50 cm
		L 54.33"	W 36.22"	H 18.50"	H 19.69"
	T:	L 138 cm	W 92 cm	H 47 cm	H 50 cm
		L 54.33"	W 36.22"	H 18.50"	H 19.69"

		Antiskid	Wood	Wheels (only for Solo)
	Solo:	4 kg 8.82 lbs	6 kg 13.23 lbs	6 kg 13.23 lbs
	Duo:	7,5 kg 16.53 lbs	11,5 kg 25.35 lbs	
	Trio:	10,8 kg 23.81 lbs	17,5 kg 38.58 lbs	
	Quatro:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	
	L Left Right:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	
	T:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	


Solo




Duo




Trio




Quatro

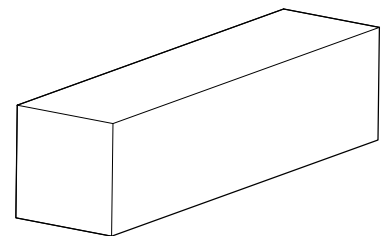


L Left

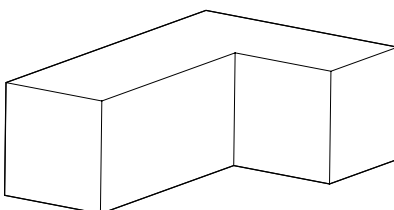

L Right




T



Components


Bottom

Antiskid




Bottom:
Antiskid

Wood

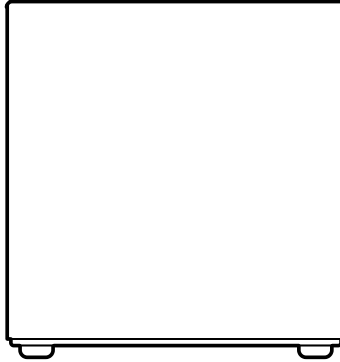

Bottom:
Black MDF
4 Plastic Feet

Wheels (only for Solo)

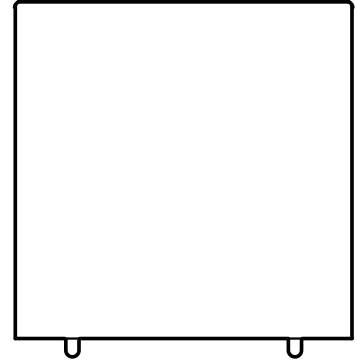


Bottom:
Poplar multiplex
MDF covered with antiskid
4 Wheels
(load capacity: 40 kg | 88.18 lbs
per wheel)



Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A

Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Revive 2

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 420 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5


Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4



Clara 2

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 2

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero

kvadrat



Category C

Composition 96% new wool, 4% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Tonus Meadow

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 3, EN ISO 12945



Memory 2

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945



Matrix

kvadrat



Category F

Composition 100% Trevira CS

Weight 760 g/lin.m

Abrasion resistance

App. 60.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 crib 5 | BS 5867 part 2 type B

DIN 4102 B1 | Önorm B1/Q1 | NF D 60 013

UNI 9175 11M | US Cal. Tech. Bull. 117 | NFPA 701

IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions


Solo




Duo




Trio

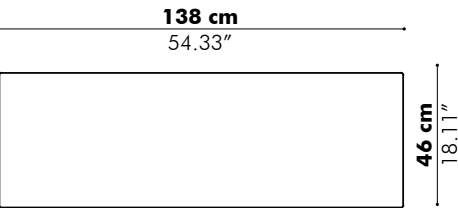


Quattro

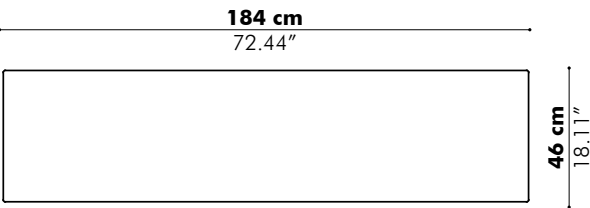


L Left

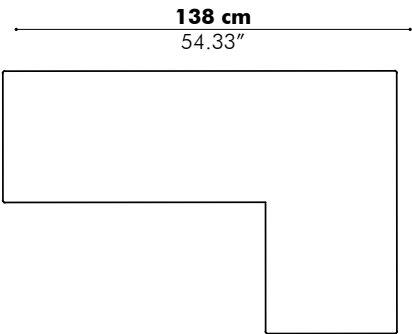


L Right

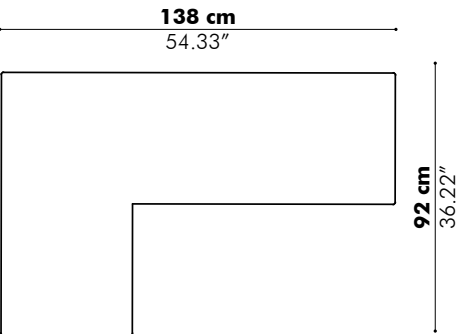


T

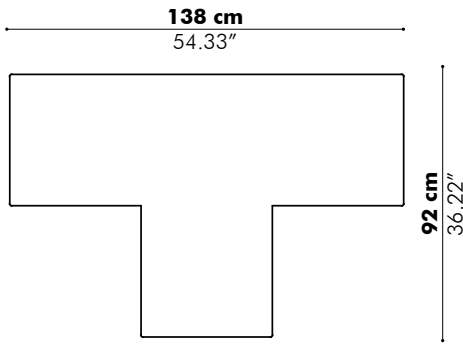


Antiskid



Wood




Wheels



Acoustics

BuzziCube Flat

Equivalent sound absorption area in m² per object

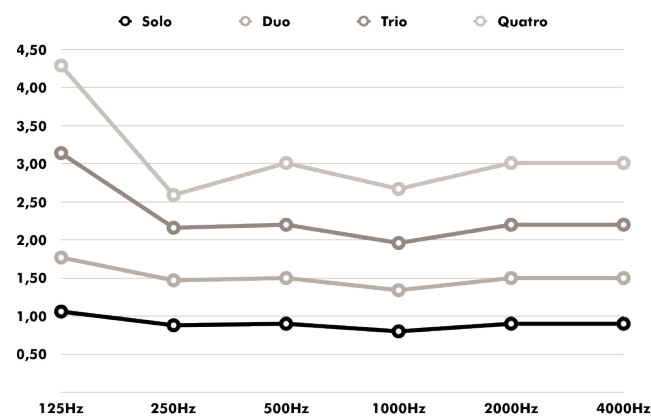

Hz	Solo Aeq/m²	Duo Aeq/m²	Trio Aeq/m²	Quatro Aeq/m²
125	1.06	1.77	3.14	4.29
250	0.88	1.47	2.16	2.59
500	0.90	1.50	2.20	3.01
1000	0.80	1.34	1.96	2.67
2000	0.90	1.50	2.20	3.01
4000	0.90	1.50	2.20	3.01

Specifications

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Width 148 cm | 58.27"
Thickness 0,8 mm | 0.031 inch
Abrasion resistance 40.000 Martindale, 50.000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA: 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5



Maintenance


Vacuum clean regularly. Don't wash. Don't remove the Fabric from the product.
Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



NO BOUNDARIES



Fabric

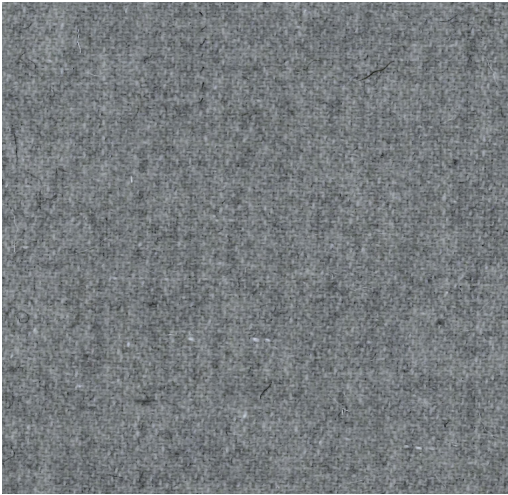

FA-LightGrey 1000



FA-Kiezel 7



FA-Ivory 101



FA-Naturel 1



FA-Beige 1037



FA-Dolphin 180



FA-Shitake 124



FA-DarkBrown 18



FA-Rust 29



FA-Taupe 1008



FA-Mint 50



FA-Azure 144



FA-Olive 53




FA-Army 14



FA-Zwart 1003



FA-MidGrey 1001




FA-Blue 45



FA-Petrol 56

Fabric

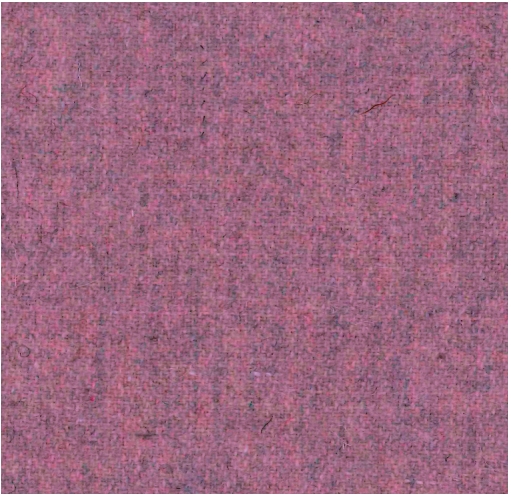


FA-Pink 73



FA-Purple 78



FA-Aubergine 74



FA-Prune 76



FA-Fuchsia 77




FA-Violet 72




FA-Navy 1007




FA-Indigo 90



FA-LightBlue 41




FA-Aqua 143



FA-OceanBlue 147




FA-Pistache 52




FA-Yellow 24



FA-Red 2011



FA-Fire 139



FA-Mandarin 129



FA-Orange 2012

