
BuzziBalance

Product Specification Sheet

This document contains technical
information about the BuzziBalance



www.buzzi.space



Move your body, move your mind

BuzziBalance creates a non-traditional environment that brings people together, provoking joy and conversation. The BuzziBalance family offers both a seating and standing element.

While standing, BuzziBalance Board becomes a muscle activator. As one balances on the wooden-carved rocking board for a few moments, the mind and body are awakened.

While sitting on the BuzziBalance, a rocking pouf in small and large version, the benefits of purposeful stretching are brought into the workplace. The upholstered seat also offers added acoustical benefits.

The perfect solution for creative hubs in offices, hospitality or residential homes. BuzziBalance offers the best of both worlds. Stretch your legs for a quick phone call or gather and rock away during a creative session.

Design by 13&9 Design

General

-  BuzziBalance Small | BuzziBalance Small High | BuzziBalance Large
BuzziBalance Board Small | BuzziBalance Board Large
-  Filling: Foam FR030.6/SG16.3 + Plywood/MDF/Pinewood
Bottom: Solid Wood Ash
-  Cover: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Velvet, Hero, Tonus 4, Tonus Meadow, Memory 2 or Matrix

Acoustics




Absorption

Content

Configurations	3
Fabrics	5
Dimensions	9
Acoustics	11

Configurations

BuzziBalance Small



Filling: Foam FR030.6/SG16.3 + Plywood/MDF/Pinewood
Bottom: Solid Wood Ash



Ø 56 cm, H 38 cm
Ø 22.05", H 14.96"




13,3 kg
29.32 lbs



Cover: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2,
Terra, Clara 2, Remix 2, Velvet, Hero, Tonus 4, Tonus
Meadow, Memory 2 or Matrix

BuzziBalance Small High

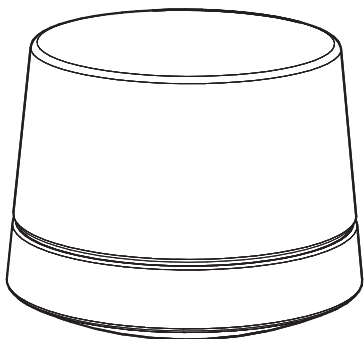

Filling: Foam FR030.6/SG16.3 + Plywood + Cardboard
Bottom: Solid Wood Ash



Ø 56 cm, H 46,5 cm
Ø 22.05", H 18.31"




13,8 kg
30.42 lbs



Cover: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2,
Terra, Clara 2, Remix 2, Velvet, Hero, Tonus 4, Tonus
Meadow, Memory 2 or Matrix

BuzziBalance Large

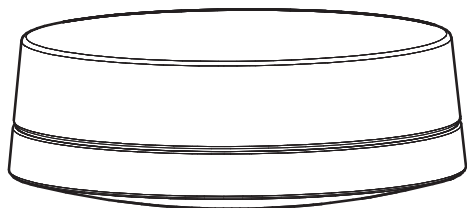

Filling: Foam FR030.6/SG16.3 + Plywood/MDF/Pinewood
Bottom: Solid Wood Ash



Ø 98 cm, H 38 cm
Ø 38.58", H 14.96"



39,5 kg
87.08 lbs



Cover: Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2,
Terra, Clara 2, Remix 2, Velvet, Hero, Tonus 4, Tonus
Meadow, Memory 2 or Matrix

BuzziBalance Board Small



🌲 Bottom: Solid Wood Ash

✂ Ø 55 cm, H 7 cm
Ø 21.65", H 2.76"

⚖ 6,2 kg
13.67 lbs

BuzziBalance Board Large




🌲 Bottom: Solid Wood Ash

✂ Ø 97 cm, H 7 cm
Ø 38.19", H 2.76"

⚖ 19 kg
41.89 lbs

Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A

Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5


Pilling Note 4-5, EN ISO 12945



kvadrat

Revive 2

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 420 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²


Abrasion resistance > 100.000 Martindale

Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5


Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4



Clara 2

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 2

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero

kvadrat



Category C

Composition 96% new wool, 4% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Tonus Meadow

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 3, EN ISO 12945



Memory 2

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945



Matrix

kvadrat



Category F

Composition 100% Trevira CS

Weight 760 g/lin.m

Abrasion resistance

App. 60.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 crib 5 | BS 5867 part 2 type B
DIN 4102 B1 | Önorm B1/Q1 | NF D 60 013
UNI 9175 1IM | US Cal. Tech. Bull. 117 | NFPA 701
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5


Pilling Note 4, EN ISO 12945




Dimensions

BuzziBalance Small

Front

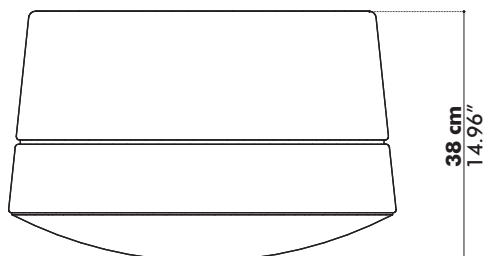


Top




BuzziBalance Small High

Front

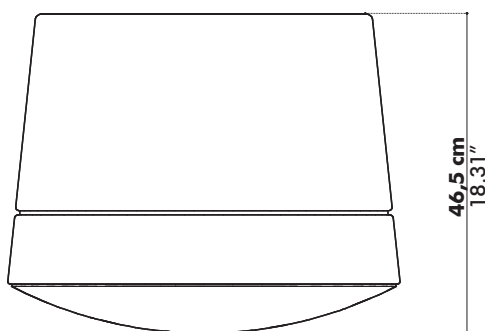


Top




BuzziBalance Large

Front

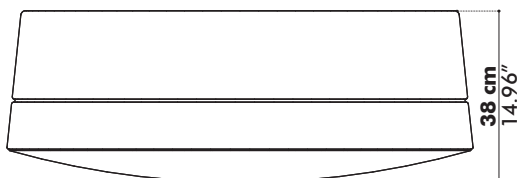


Top

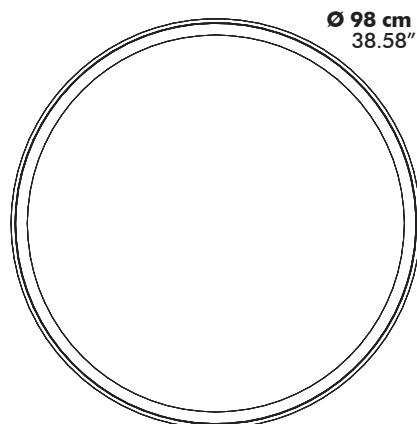


BuzziBalance Board Small

Front



Top

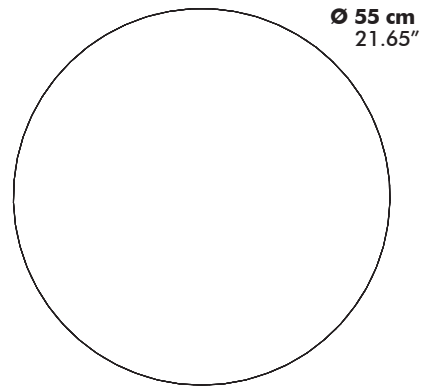


BuzziBalance Board Large

Front




Top

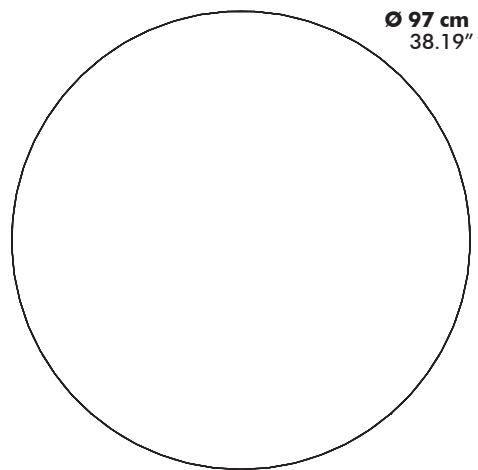

Acoustics

BuzziBalance Small | Large

Equivalent sound absorption area in m² per object

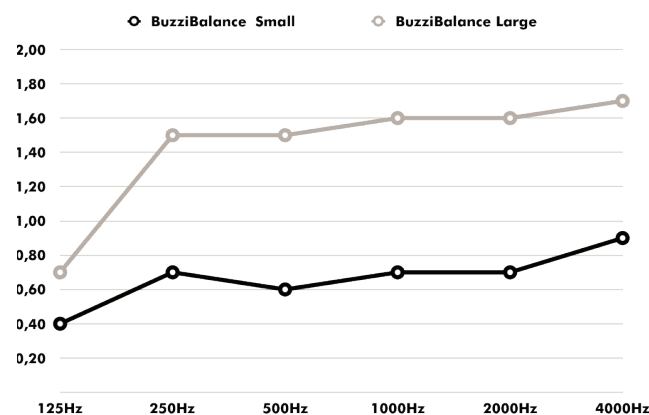

Hz	Small Aeq/m ²	Large Aeq/m ²
125	0.40	0.70
250	0.70	1.50
500	0.60	1.50
1000	0.70	1.60
2000	0.70	1.60
4000	0.90	1.70

Specifications

Composition 100% Polyacryl
Weight 456 g/m² | 13.45 oz/yd²
Width 148 cm | 58.27”
Thickness 1,2 mm | 0.047”
Abrasion resistance 40.000 Martindale
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
US: CAL TB 117
Fastness to light EU: 5
Fastness to rubbing EU: Wet: 3 | Dry: 3




Maintenance


Vacuum clean regularly. Don’t wash. Don’t remove the Rough from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.




Rough

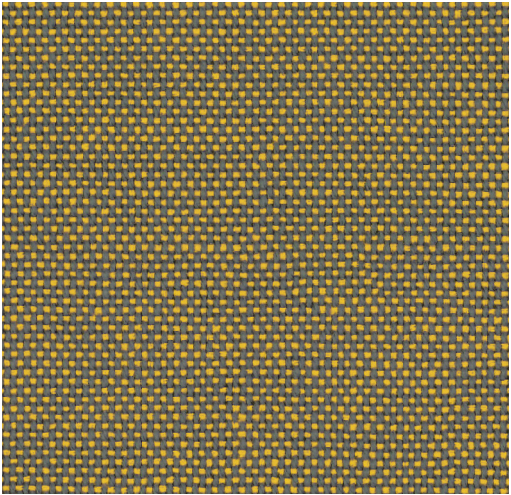


RO-Taffy 185




RO-Champagne 186




RO-Coffee 81




RO-Celery 80




RO-Lemon 122




RO-Lime 157




RO-Olive 53




RO-Turtle 88




RO-Forest 162



RO-Ash 40




RO-Dolphin 180




RO-Charcoal 79

Rough

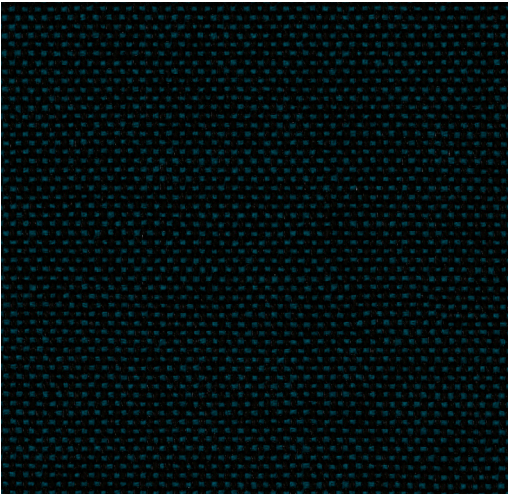


RO-Denim 153




RO-IceBlue 43




RO-LightBlue 41




RO-Niagara 158




RO-Hunter 156




RO-SkyBlue 142




RO-Estate 152




RO-Hyacinth 159



RO-Imperial 189



RO-LolliPop 187



RO-Dahlia 188



Specifications

Composition 100% PES
Weight 375 g/m² | 11.06 oz/yd²
Width 140 cm | 55.12”
Thickness 0,7mm | 0.0275”
Abrasion resistance >100.000 Martindale
Fastness to light EU: 4-5
Fastness to rubbing EU: Wet 4 | Dry 4-5
Pilling EU: 4-5
Match Weight ±5% | Width ±2%

Maintenance


Vacuum clean regularly. Don’t wash. Don’t remove the Velvet from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.




Velvet



VE-Gold 401



VE-Burgundy 201



VE-Blush 704



VE-Pearl 902




VE-Emperador 106




VE-Amber 300


Velvet

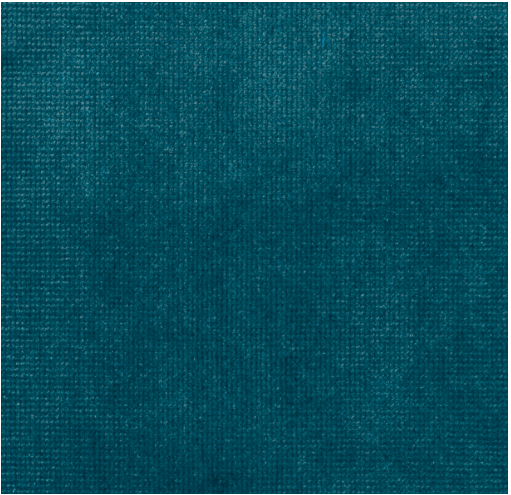


VE-Peacock 600




VE-Botanic 501




VE-Crocodile 502



VE-Scarab 505




VE-Sky 601




VE-Prussian 606



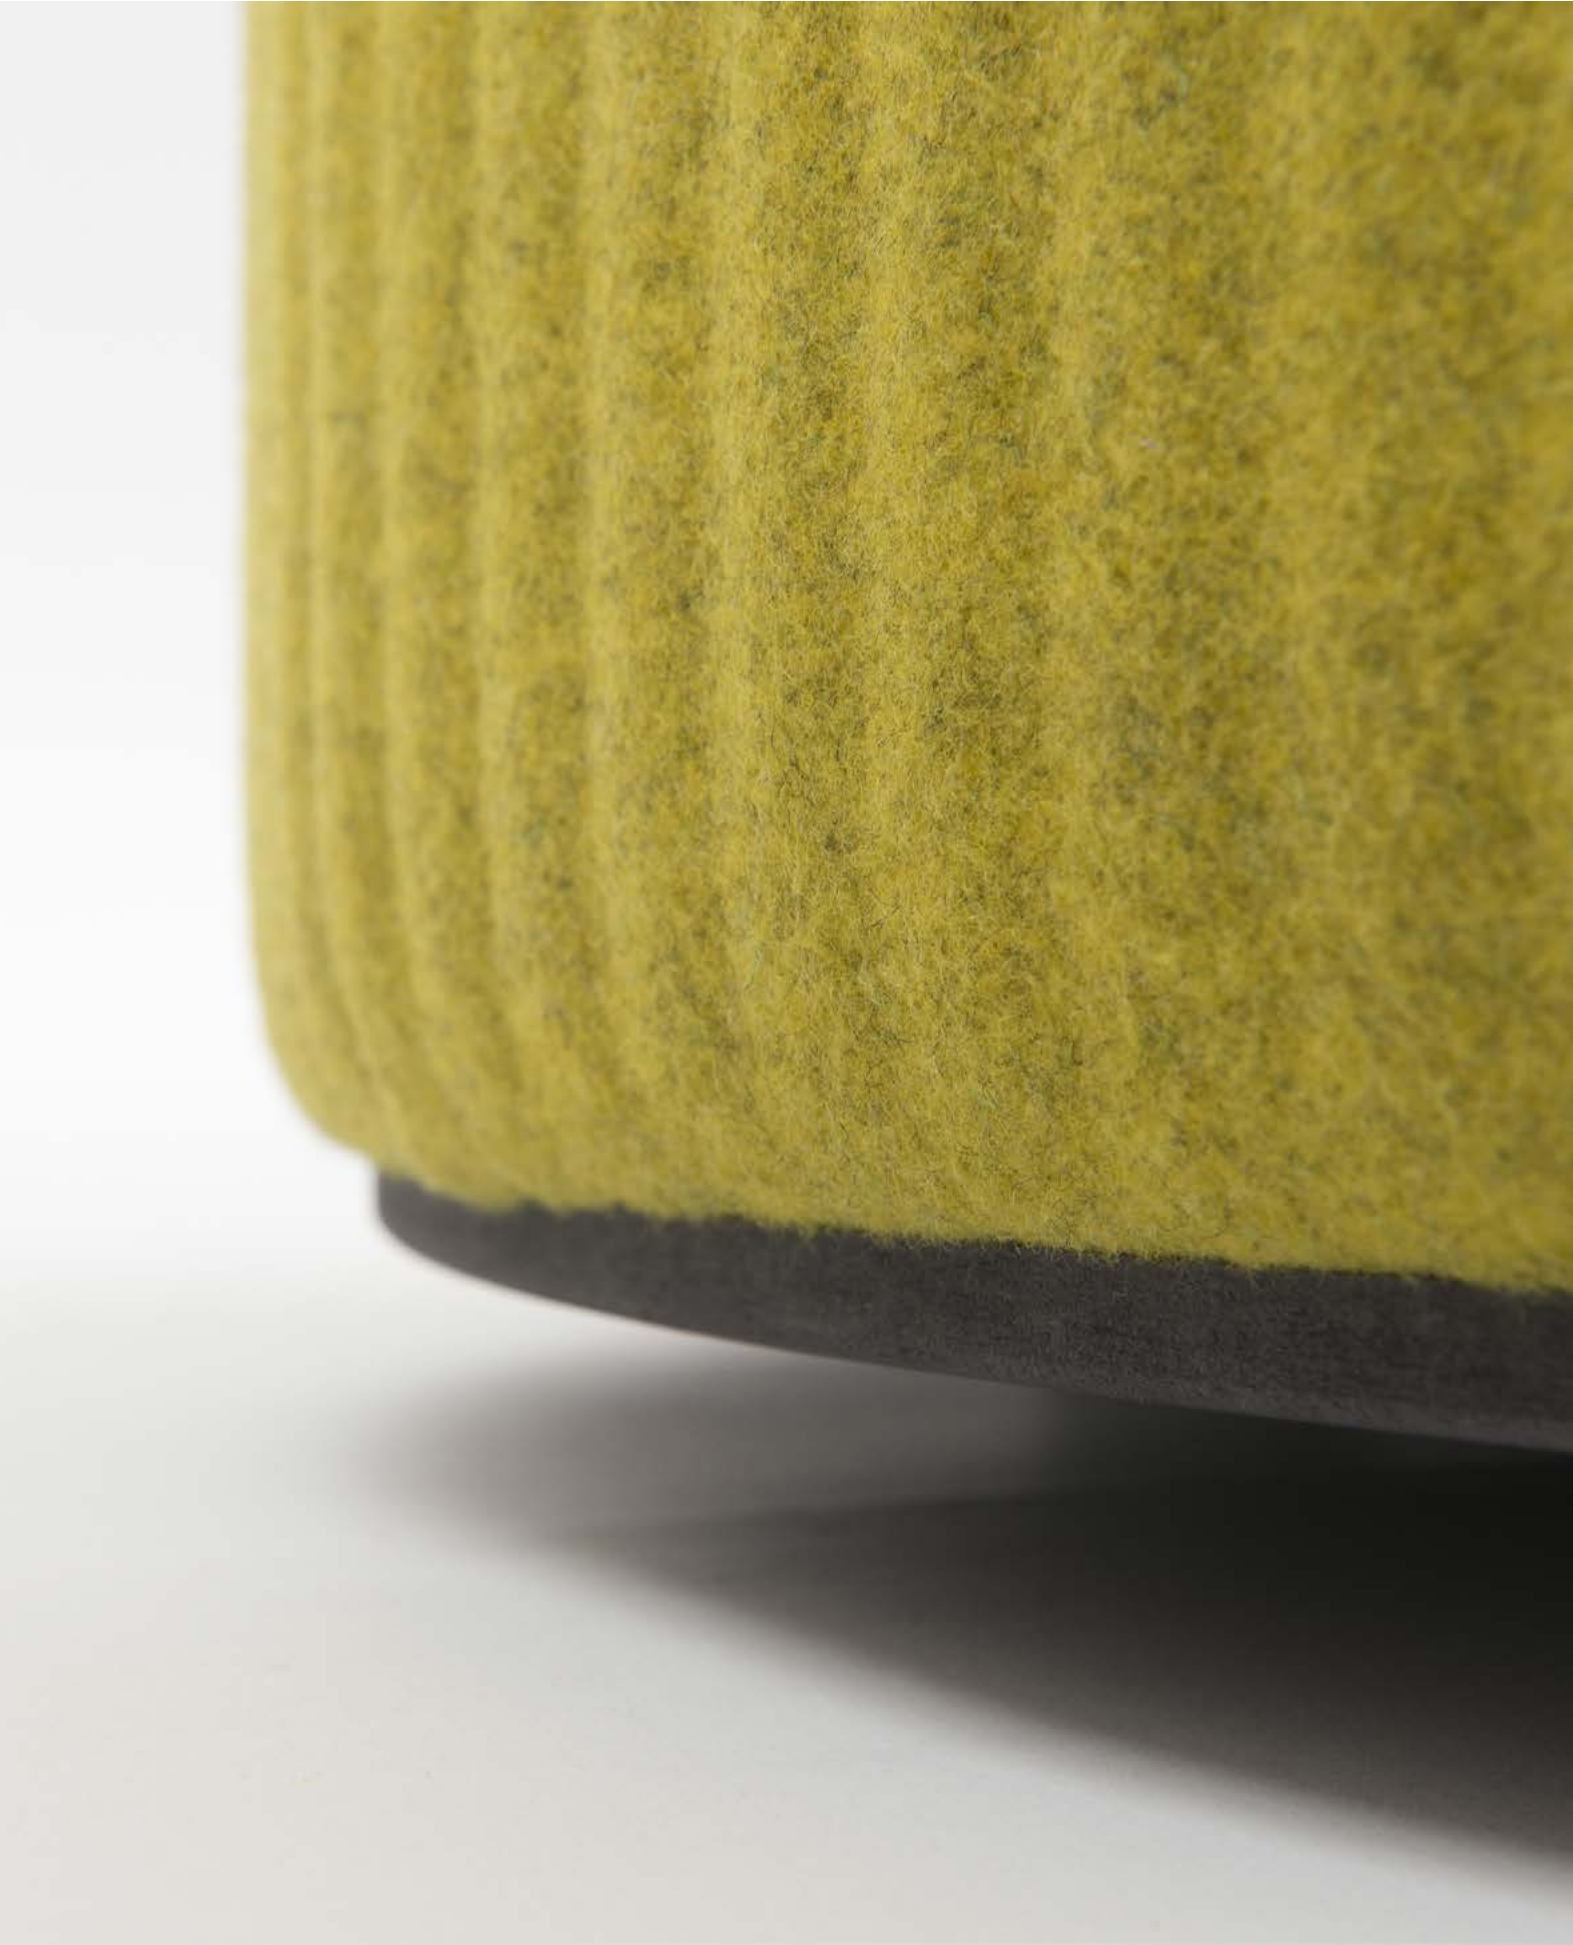

Fabric



FA-LightGrey
1000

Composition 75% Recycled Wool, 25% Recycled Polyacryl,
Weight 405 g/m² | 11.94 oz/yd²
Width 148 cm | 58.27”
Thickness 0,8 mm | 0.031 inch
Abrasion resistance 40.000 Martindale, 50.000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA: 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5
Maintenance Vacuum clean regularly. Don't wash. Don't remove the Fabric from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



FA-Zwart
1003



FA-MidGrey
1001



FA-DarkBrown
18



FA-Taupe
1008



FA-Rust
29




FA-Shitake
124



FA-Dolphin
180



FA-Kiezel
7



FA-Silver
57



FA-Beige
1037



FA-Naturel
1



FA-Ivory
101



FA-Nude
70



FA-Violet
72



FA-Purple
78



FA-Aubergine
74



FA-Prune
76



FA-Pink
73



FA-Fuchsia
77



FA-Lila
39



FA-Navy
1007



FA-Blue
45



FA-Indigo
90



FA-Petrol
56



FA-LightBlue
41




FA-Aqua
143



FA-OceanBlue
147



FA-Electric
16




FA-Azure
144



FA-Mint
50



FA-Bottle
61



FA-Olive
53



FA-Army
14



FA-Pistache
52



FA-Grass
59




FA-Jade
42



FA-Red
2011



FA-Fire
139



FA-Mandarin
129



FA-Orange
2012




FA-Autumn
33



FA-Camel
56



FA-Mustard
63



FA-Yellow
24

CAT A

FABRIC
TREVIRA CS+
TREVIRA CS
REVIVE 1

Note color deviation may occur.
Find the latest update of the material specifications and colors on our website: www.buzzi.space