

June

Design by Emiliana Design Studio.

VIBIA

Reference

4745.

Application

Outdoor lamps

Installation type

Surface

Description

The June hanging lamp is a design by Emiliana Design Studio. The Garland June has three luminous spheres that emit direct light, can be attached to the wall, a tree or other vertical surface. Perfect for outdoor use, given its IP65 rating.

Diffuser

Polycarbonate diffuser

Materials

Sphere: opal blown glass

Diffuser: Polycarbonate


Horizontal tube: Steel

Finish



4745-54 Matt dark-brown lacquer (Pantone Black U)

Sketch




Electrical characteristics

3 x LED 1W 350mA



Total 3.0 W



Light source: 2700K CRI >80 365 lm 122 lm/W

Driver included: CC - Constant Current 350 mA 100-240V 50/60Hz

Electronic dimming NO DIMMING

Technical characteristics

- Wet location

Physical characteristics

1 Box / 0.17 x 0.26 x 1.40 m. / Vol. 0.0618 m³ /

Gross weight 4.0 kg. / Net weight 1.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 25.91 lm/W

Coordinate system : CG

Total flux : 177.20 lm

Maximum value : 24.01 cd



Light position : C=15.00 G=2.00

Symmetry on the planes : Asymmetric

Isolux : (floor)

Light position :

X=0.00m Y=0.00m Z=3.00m



Certificates



June

Design by Emiliana Design Studio.

VIBIA

Reference

4750.

Application

Outdoor lamps

Installation type

Surface

Description

The June hanging lamp is a design by Emiliana Design Studio. The Garland June has five luminous spheres that emit direct light, can be attached to the wall, a tree or other vertical surface. Perfect for outdoor use, given its IP65 rating.

Diffuser

Polycarbonate diffuser

Materials

Sphere: opal blown glass

Vertical tube: Steel


Diffuser: Polycarbonate

Finish



4750-54 Matt dark-brown lacquer (Pantone Black U)

Sketch




Electrical characteristics

5 x LED 1W 350mA



Total 5.0 W



Light source: 2700K CRI >80 609 lm 122 lm/W

Driver included: CC - Constant Current 350 mA 110-240V 50/60Hz

Electronic dimming NO DIMMING

Technical characteristics

- Wet location

Physical characteristics

1 Box / 0.17 x 0.26 x 2.30 m. / Vol. 0.1016 m³ /

Gross weight 4.5 kg. / Net weight 1.8 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 25.27 lm/W

Coordinate system : CG

Total flux : 288.06 lm

Maximum value : 35.63 cd


Light position : C=15.00 G=3.00

Symmetry on the planes : Asymmetric

Isolux : (floor)

Light position :

X=0.00m Y=0.00m Z=3.00m

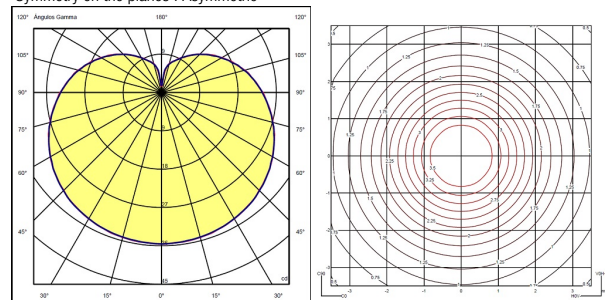

Certificates

