

BuzziCube 3D

Product Specification Sheet

This document contains technical information about the BuzziCube 3D Solo, Duo, Trio, Quatro, L Right, L Left, T



www.buzzi.space



Sound absorbing 3D pouf

A high-design pouf that is unique in its class thanks to its revolutionary form and high-tech production process. The 3D foam covered with a variety of BuzziSpace fabrics gives it a unique touch.

Design by BuzziSpace Studio

General

📌 BuzziCube 3D Solo, Duo, Trio, Quatro, L Right, L Left, T

Filling: Foam SG35,5

🌲 Cover: 3D foam CME35H
Upholstered in: Fabric, Rough, Trevira CS+, Memory 2
Pattern: 1 SQ, 4 SQ, 16 SQ

☁ Dry usage

🔑 Assembled

Acoustics



Absorption



Diffusion

Content

Configurations	3
Patterns	4
Components	4
Fabrics	5
Dimensions	7
Acoustics	8

Configurations


BuzziCube 3D

- Solo | Duo | Trio | Quatro | L Right | L Left | T
- 3D 1 SQ | 4 SQ | 16 SQ
- Bottom: antiskid, wood or with wheels (wheels only for Solo)
- Upholstery in Fabric, Rough, Trevira CS+, Memory 2


			Antiskid	Wood	Wheels (only for Solo)
✂	Solo:	L 50 cm L 19.69"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	Duo:	L 94 cm L 37.01"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	Trio:	L 138 cm L 54.33"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	Quatro:	L 182 cm L 71.65"	W 50 cm W 19.69"	H 47 cm H 18.50"	H 50 cm H 19.69"
	L Left Right:	L 138 cm L 54.33 "	W 93 cm W 36.61"	H 47cm H 18.50"	H 50 cm H 19.69"
	T:	L 138 cm L 54.33"	W 93 cm W 36.61"	H 47 cm H 18.50"	H 50 cm H 19.69"

		Antiskid	Wood	Wheels (only for Solo)
⚖	Solo:	4 kg 8.82 lbs	6 kg 13.23 lbs	Solo: 6 kg 13.23 lbs
	Duo:	7,5 kg 16.53 lbs	11,5 kg 25.35 lbs	
	Trio:	11 kg 24.25 lbs	17,5 kg 38.58 lbs	
	Quatro:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	
	L Left Right:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	
	T:	14,5 kg 31.97 lbs	22,6 kg 49.82 lbs	


Solo




Duo




Trio




Quatro

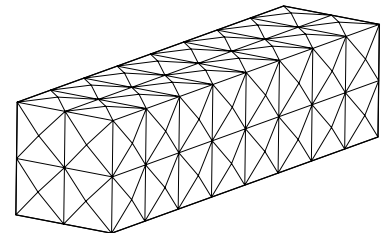


L Left

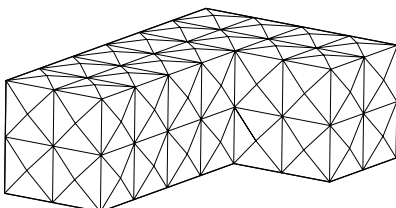

L Right




T




Patterns


1 SQ



4 SQ




16 SQ



Components


Bottom

Antiskid

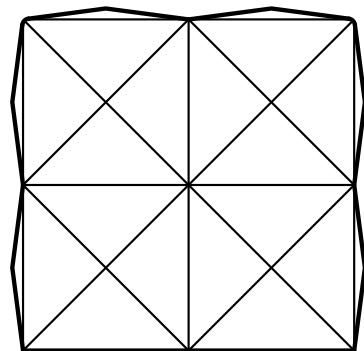


Bottom:
Antiskid

Wood

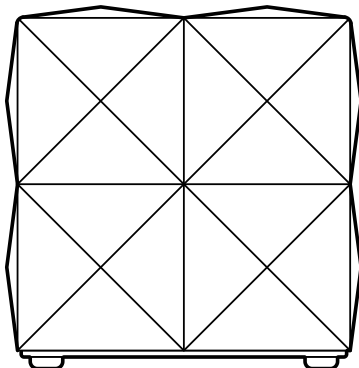

Bottom:
Black MDF
4 Plastic Feet

Wheels (only for Solo)

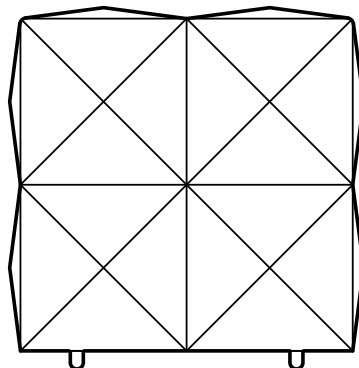


Bottom:
Poplar multiplex
MDF covered with antiskid
4 Wheels
(load capacity: 40 kg | 88.18 lbs
per wheel)



Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek


Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5





Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions


Solo




Duo




Trio

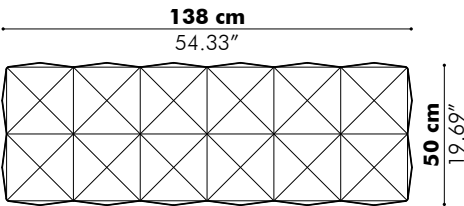


Quatro

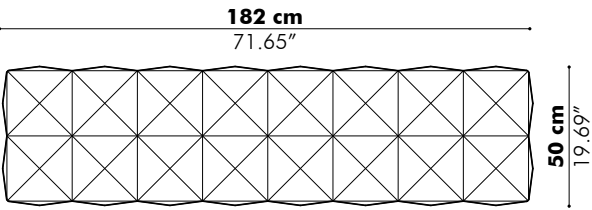


L Left

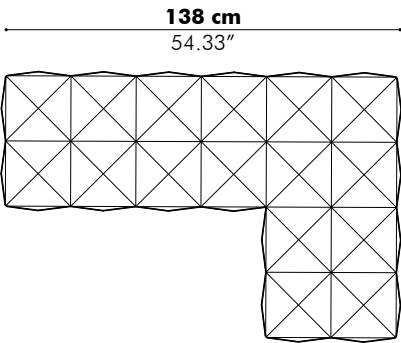


L Right

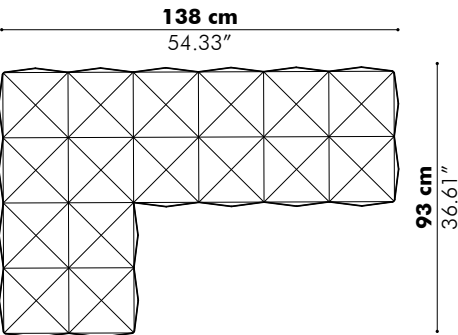


T

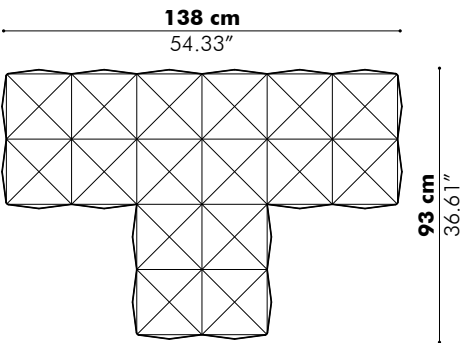


Antiskid



Wood




Wheels



Acoustics

BuzziCube 3D

Equivalent sound absorption area in m² per object

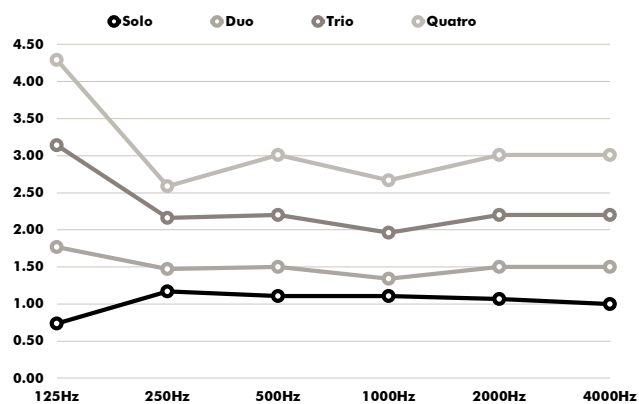

Hz	Solo Aeq/m²	Duo Aeq/m²	Trio Aeq/m²	Quatro Aeq/m²
125	1.06	1.77	3.14	4.29
250	0.88	1.47	2.16	2.59
500	0.90	1.50	2.20	3.01
1000	0.80	1.34	1.96	2.67
2000	0.90	1.50	2.20	3.01
4000	0.90	1.50	2.20	3.01

Specifications

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Width 148 cm | 58.27"
Thickness 0,8 mm | 0.031 inch
Abrasion resistance 40.000 Martindale, 50.000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA: 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5




Maintenance

Vacuum clean regularly. Don't wash. Don't remove the Fabric from the product.
Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



Fabric

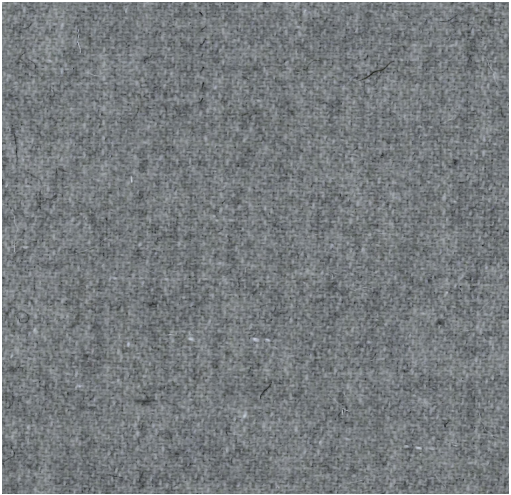

FA-LightGrey 1000



FA-Kiesel 7



FA-Ivory 101



FA-Naturel 1



FA-Beige 1037



FA-Dolphin 180



FA-Shitake 124



FA-DarkBrown 18




FA-Rust 29



FA-Taupe 1008



FA-Mint 50



FA-Azure 144



FA-Olive 53




FA-Army 14



FA-Zwart 1003



FA-MidGrey 1001




FA-Blue 45



FA-Petrol 56

Fabric

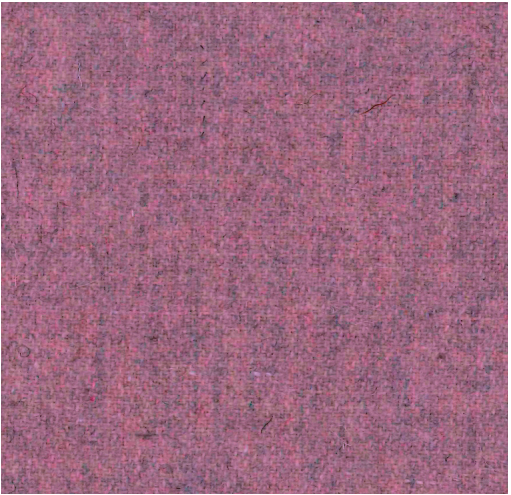


FA-Pink 73



FA-Purple 78



FA-Aubergine 74



FA-Prune 76



FA-Fuchsia 77




FA-Violet 72




FA-Navy 1007



FA-Indigo 90



FA-LightBlue 41




FA-Aqua 143



FA-OceanBlue 147



FA-Pistache 52




FA-Yellow 24



FA-Red 2011



FA-Fire 139



FA-Mandarin 129



FA-Orange 2012

