

BuzziBack

Product Specification Sheet

This document contains technical information about the BuzziBack



www.buzzi.space

Wall panel with adhesive tape or magnetic tape on backside

Spice up the back of your cabinets or your walls with the BuzziBack. Fully customizable, this acoustic treatment is available in different colors and tailored sizes. The sound absorbing screen also acts as a pin board.

Design by Sas Adriaenssens

General



BuzziBack

2 layers of BuzziFelt stitched together



Extra layer available in Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Tonus Meadow, Memory 2, Matrix



Min. W 40 cm | 15.75" H 80 cm | 31.50"

Max. W 120 cm | 47.24" H 200 cm | 78.74"

Felt: 2 kg/m² | 28.44 lbs/in²



+ selfadhesive tape (W 4 cm | 1.57"): 28 g/lm | 0.91 oz/ly

+ magnetic tape (W 10 cm | 3.94"): 340 g/lm | 10.96 oz/ly



Mounting on vertical surfaces only

Acoustics



Absorption

Content

Configurations	3
Fabrics	4
Dimensions	8
Acoustics	9

Configuration

BuzziBack



2 layers of BuzziFelt stitched together
Extra layer available in Fabric, Rough, Trevira CS+ | CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Tonus Meadow, Memory 2, Matrix



Min. W 40 cm | 15.75" H 80 cm | 31.50"
Max. W 120 cm | 47.24" H 200 cm | 78.74"




Felt: 2 kg/m² | 28.44 lbs/in²
+ selfadhesive tape (W 4 cm | 1.57"): 28 g/lm | 0.91 oz/ly
+ magnetic tape (W 10 cm | 3.94"): 340 g/lm | 10.96 oz/ly



Mounted with adhesive tape (W 4 cm | 1.57") or
magnetic tape on the back (W 10 cm | 3.94")



Mounting on vertical surfaces only

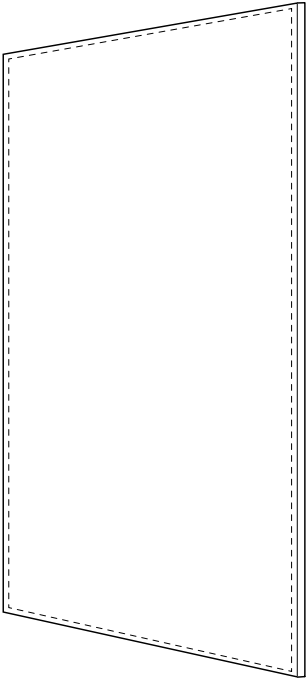

FELT



BUZZIFELT
SLICED BUZZIFELT

BuzziFelt




FE-Anthracyte 68


Composition 100% Recycled PE.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Width 170 cm | 66.93"
Thickness 6 mm | 0.236"
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5
Maintenance Vacuum clean regularly. Don't wash. Don't remove the BuzziFelt from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.




FE-Jeans 75



FE-StoneGrey 67



FE-LightBlue 60




FE-Curry 61




FE-OffWhite 63




FE-Mokka 74




FE-EcoBrown 58




FE-Lime 64



FE-Pink 65



FE-Orange 66





FE-Red 59

Note color deviation may occur.
Find the latest update of the material specifications and colors on our website: www.buzzi.space

Dimensions


Side View

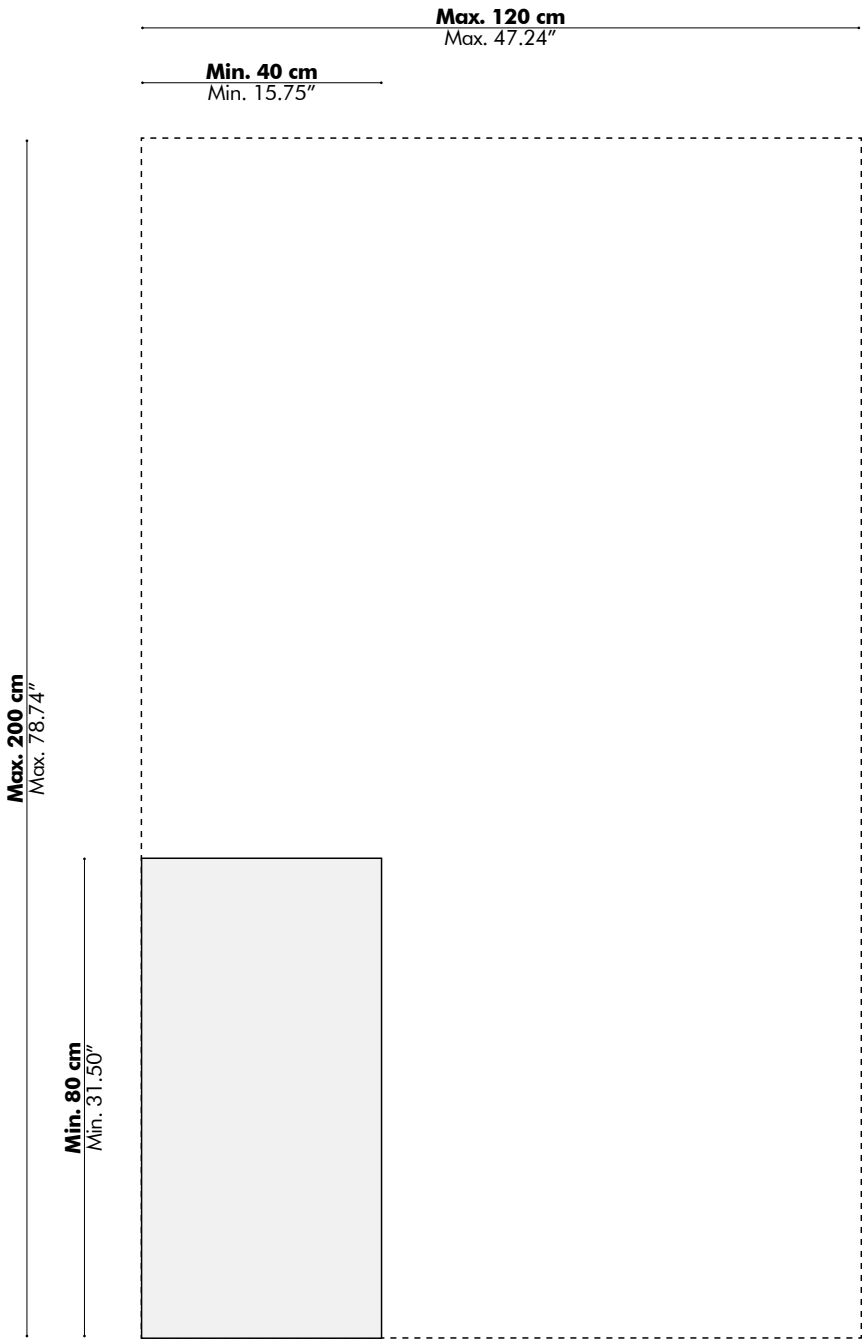

Acoustics

BuzziBack

Absorption coefficient

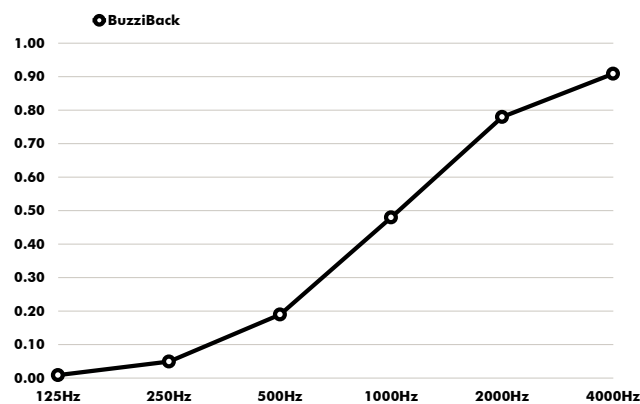

Hz	α^s
125	0.01
250	0.05
500	0.19
1000	0.48
2000	0.78
4000	0.91