

# SLANT

PRODUCT FACT SHEET



## SLANT


DESIGN BY BRANCH, 2021

Inspired by the power of shapes and how they impact their surroundings, Japanese design team Branch's Slant Lamp features a bold graphic aesthetic that takes possession of the space it occupies. Comprising a simple, slanted cylindrical form with a weighted base to keep the angle perfectly balanced, all components are concealed within to retain the clean, elemental silhouette. Crafted in aluminium with a wet spray satin finish to create a smooth surface, it utilises a standard retro fit bulb, hidden away behind the lamp's acrylic diffuser, which softly distributes the light. Available in several colour options, Slant's sculptural design and functional, directional light make it suitable for a variety of home and office settings.

### HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- Sculptural and graphic lamp comprising a simple, slanted cylindrical form with a weighted base to keep the angle perfectly balanced.
- CE approved.
- Designed for use with a replaceable standard retro fit LED dimmable bulb.
- Stepless inline dimmer.
- Table lamp suitable for both private and office environments.
- For indoor use only.

### DIMENSIONS

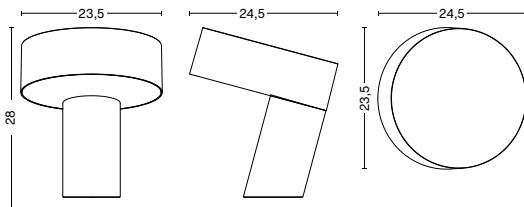

WIDTH 23,5 CM | 9.25"

DEPTH 24,5 CM | 9.65"

HEIGHT 28 CM | 11.02"

### MATERIALS

#### SHADE & BASE

Die-cast and extruded aluminum with a satin, wet spray finish.

#### DIFFUSER

Injection moulded Acrylic (PMMA)

#### CORD

Braided textile cable in black with silicone insulation.

### OPTIONS

Incl. UK Plug converter.

### COLOUR & FINISH

Please note that the colour codes are indicative.



SOFT BLACK  
RAL 9004



WHITE  
RAL 9001



KHAKI GREEN  
NCS S 5020-Y10R

## TECHNICAL SPECIFICATIONS

### RECOMMENDED LIGHT SOURCE\*

LED 27 (A15 or A19), 10-13W (max. 15W),  
1000-1500lm, 2700K warm white

### DIMMABLE

Yes\*\*

### POWER SUPPLY

220-240V AC at 50/60Hz

### IP

20

### CORD LENGTH

200 cm

### SWITCH

Stepless inline  
dimmer switch

\*Bulb not included.

\*\*If used with a dimmable LED bulb.

## TEST SPECIFICATION OUTPUTS\*

### FLUX (LUMENS)

284lm

### CCT (KELVIN)


3000, warm white

### CRI (1-100)

80

\*Photometrics and the test specification shown is taken using the recommended LED bulb fitted in the production luminaire.

## PHOTOMETRICS

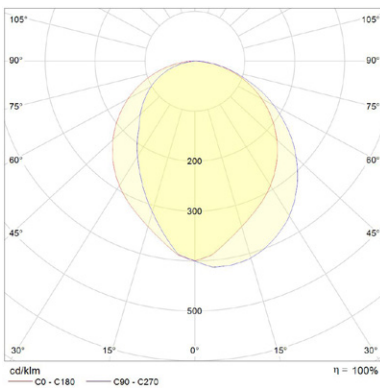

## CERTIFICATES

### CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

## COUNTRY OF ORIGIN

China

## DOWNLOADS

Packshots and lifestyle photos, 2D 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[LINK TO IMAGE BANK](#)