BuzziMe
Product Specification Sheet

This document contains technical information about the BuzziMe

·BUZZI SPACE

www.buzzi.space

Lounge Chair
Me, myself and I: there are times when you want to spend some time on your own in peace and quiet. BuzziMe is the ideal space to get away from it all. Belgian designer Axel Enthoven was responsible for an ingenious look that harmoniously combines functionality and ergonomics. Put two BuzziMe lounge chairs together for a private meeting. The acoustic absorption of the lounge chair reduces any external noise and vice versa: the perfect chair for lobbies, airports and offices - or your very own 'quiet' cocoon at home.

Design by Axel Enthoven

General

BuzziMe Low | BuzziMe | BuzziMe Ottoman

Shell: Plywood Birch
Covered in fabric
Cushions: acoustic foam covered with fabric
backside: antiskid
seat: acoustic foam
back: acoustic foam
Cover upholstered in Fabric, Rough, Trevira CS+|CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or Matrix
Foot: Metal swivel base, powder coated in Umbra Grey (RAL 7022)

Dry use

Fully Assembled

Bicolor (different color inside / outside) in same categorie, same collection
Tablet (left or right)

Acoustics

Absorption

Diffusion

Attenuation

Mid tone

High tone

Content

Configurations	3
Options	5
Fabrics	6
Dimensions	10

Configurations

BuzziMe Low

Shell: Plywood Birch
Covered in fabric
Cushions: acoustic foam covered with fabric
backside: antiskid
seat: acoustic foam
back: acoustic foam
Cover upholstered in Fabric, Rough, Trevira CS+|CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or Matrix
Foot: Metal swivel base, powder coated in Umbra Grey (RAL 7022)

W 71,5 cm D 93,5 cm H 95 cm
W 28.15" D 36.81" H 37.40"

45 kg | 99.21 lbs

Bicolor (different color inside / outside) in same categorie, same collection
Tablet left or right

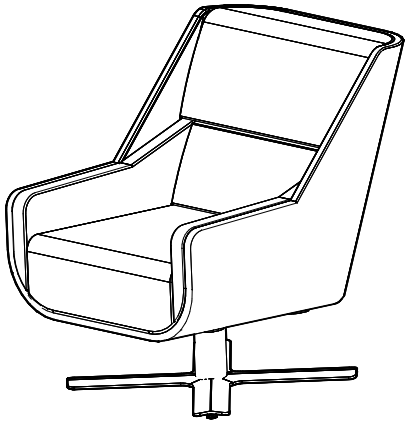

BuzziMe

Shell: Plywood Birch
Covered in fabric
Cushions: acoustic foam covered with fabric
backside: acoustic antiskid
seat: acoustic foam
back: acoustic foam
Cover upholstered in Fabric, Rough, Trevira CS+|CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or Matrix
Foot: Metal swivel base, powder coated in Umbra Grey (RAL 7022)

W 71,5 cm D 93,5 cm H 135 cm
W 28.15" D 36.81" H 53.15"

58 kg | 127.87 lbs

Bicolor (different color inside / outside) in same categorie, same collection
Tablet left or right

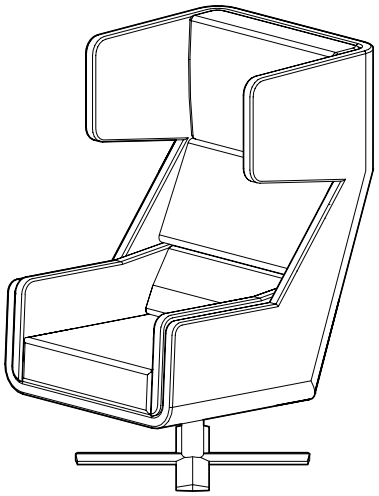

BuzziMe Ottoman

Shell: Plywood Birch
Covered in fabric
Cushions: acoustic foam
backside: antiskid

Cover upholstered in Fabric, Rough, Trevira CS+|CS, Revive 1, Revive 2, Terra, Clara 2, Remix 2, Hero, Tonus 4, Memory 2 or Matrix
Foot: Metal swivel base, powder coated in Umbra Grey (RAL 7022)

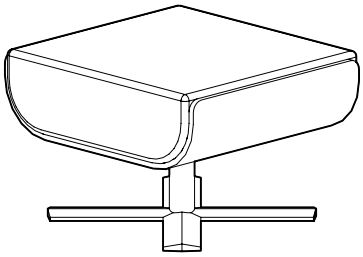

W 67 cm D 71,5 cm H 44,5 cm
W 26.38" D 28.15" H 17.52"

27,2 kg | 59.97 lbs

Bicolor (different color inside / outside)

Options

Tablet

Left or Right
Rotatable
Powder coated metal in Umbra Grey (RAL 7022)
W 28 cm D 23 cm H 28,6 cm
W 11.02” D 9.06” H 11.26”
1,75 kg | 3.86 lbs

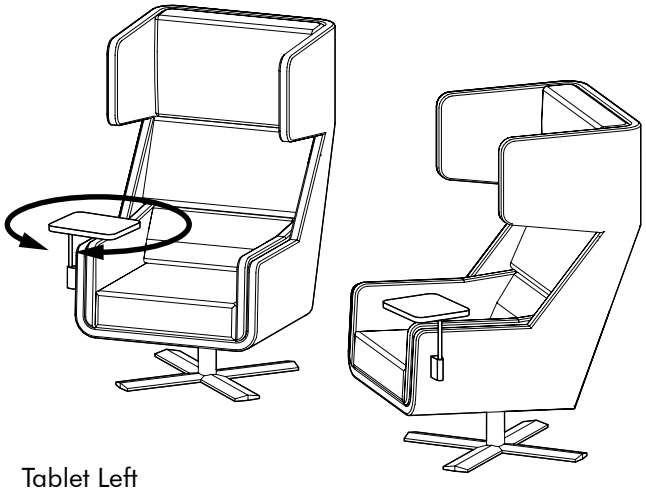

Tablet Left

Tablet Right

Bicolor

Different color inside / outside in same categorie, same collection

Fabrics

Fabric

Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl, 5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette). EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5

Rough



Category A
Composition 100% Polyacryl
Weight 456 g/m² | 13.45 oz/yd²
Abrasion resistance 40.000 Martindale
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117
Fastness to light EU: 5
Fastness to rubbing EU: Wet: 3 | Dry: 3

Trevira CS+|CS



Category A
Weight 420 g/m² | 12.39 oz/yd²
Composition 100% Polyester, Trevira CS
Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek
Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 |C1 | IMO Res. A652 (16)
Fastness to light EU: 6 | USA 5
Fastness to rubbing EU: Wet 4-5 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5

Revive 1

kvadrat



Category A
Composition 100% recycled polyester FR
Weight 430 g/lin.m
Abrasion resistance 60.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 5, wet 4-5
Pilling Note 4-5, EN ISO 12945

Revive 2

kvadrat



Category A
Composition 100% recycled polyester FR
Weight 420 g/lin.m
Abrasion resistance 45.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 5, wet 4-5
Pilling Note 4-5, EN ISO 12945

Velvet

Category B
Composition 100% PES
Weight 375 g/m² | 11.06 oz/yd²
Abrasion resistance > 100.000 Martindale
Fastness to light EU: 4-5
Fastness to rubbing EU: Wet 4 | Dry 4-5
Pilling EU: 4-5

Terra



Category B
Composition 100% Pure New Wool
Weight 370 g/m² | 10.91 oz/yd²
Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek
Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117
Fastness to light EU 5 | USA 5
Fastness to rubbing EU: Wet 4 | Dry 4
Fastness to crocking USA: Wet 4 | Dry 4

Clara 2

kvadrat



Category B
Composition 92% new wool, 8% nylon
Weight 400 g/lin.m
Abrasion resistance 80.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852, ignition source 2–3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4
Pilling Note 4, EN ISO 12945

Remix 2

kvadrat

Category B
Composition 90% new wool, 10% nylon
Weight 415 g/lin.m
Abrasion resistance 100.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4
Pilling Note 4, EN ISO 12945

Hero

kvadrat



Category C
Composition 96% new wool, 4% nylon
Weight 580 g/lin.m
Abrasion resistance 45.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)
Fastness to light Note 5-6, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 3-4, EN ISO 12945

Tonus 4

kvadrat

Category D
Composition 90% new wool, 10% Helanca
Weight 665 g/lin.m
Abrasion resistance 100.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 3-5, wet 3-5
Pilling Note 3, EN ISO 12945

Memory 2

kvadrat

Category E
Composition 100% Trevira CS
Weight 700 g/lin.m
Abrasion resistance
35.000 rubs acc. to the Martindale method, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-8, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 4, EN ISO 12945

Matrix

kvadrat



Category F
Composition 100% Trevira CS
Weight 760 g/lin.m
Abrasion resistance
App. 60.000 rubs acc. to the Martindale method, EN ISO 12947
Flammability EN 1021-1/2 | BS 5852 crib 5 | BS 5867 part 2 type B
DIN 4102 B1 | Önorm B1/Q1 | NF D 60 013
UNI 9175 1IM | US Cal. Tech. Bull. 117 | NFPA 701
IMO A.652 (16)
Fastness to light Note 5-7, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 4, EN ISO 12945

Dimensions

BuzziMe Low

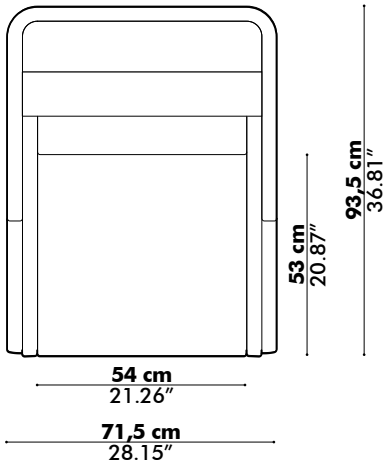

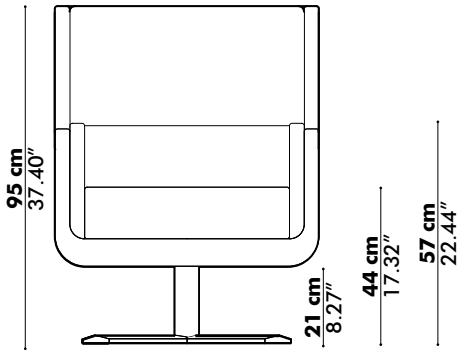



BuzziMe

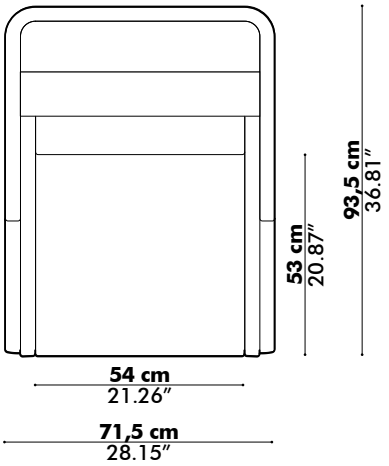
93,5 cm
36.81″
53 cm
20.87″
54 cm
21.26″
71,5 cm
28.15″

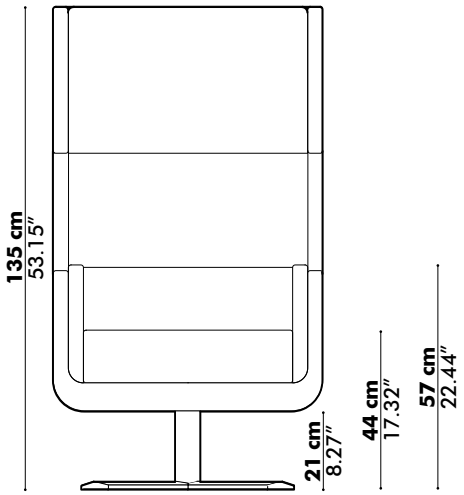
135 cm
53.15″
21 cm
8.27″
44 cm
17.32″
57 cm
22.44″

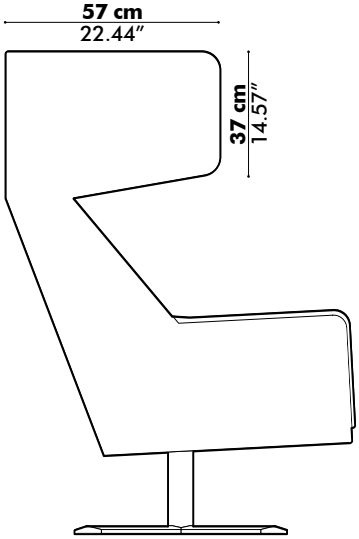
57 cm
22.44″
37 cm
14.57″

Tablet (optional)

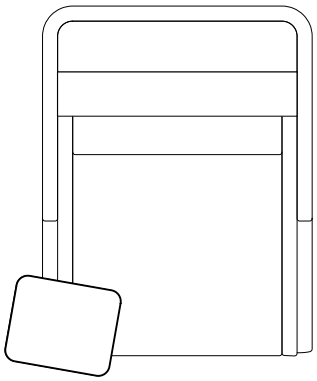

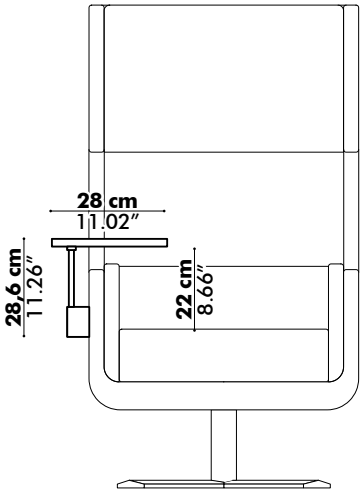

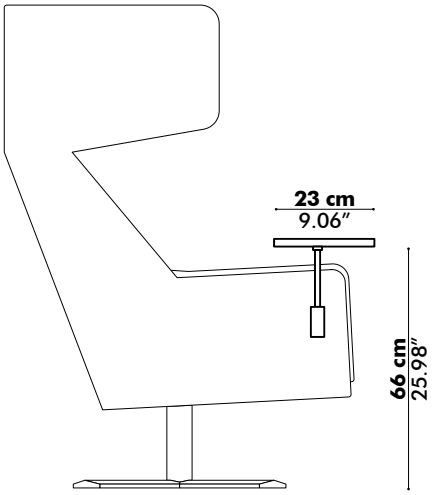

BuzziMe Ottoman



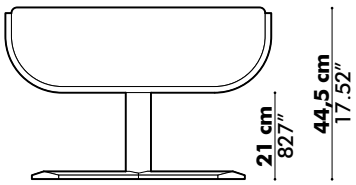



Specifications

Composition 70% Recycled Wool, 25% Recycled Polyacryl, 5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Width 148 cm | 58.27”
Thickness 0,8 mm | 0.031 inch
Abrasion resistance 40.000 Martindale, 50.000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA: 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5

Maintenance

Vacuum clean regularly. Don’t wash. Don’t remove the Fabric from the product.
Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.

CAT A **Fabric**

NO BOUNDARIES

samples@buzzi.space | usa.samples@buzzi.space | **www.buzzi.space**

Fabric

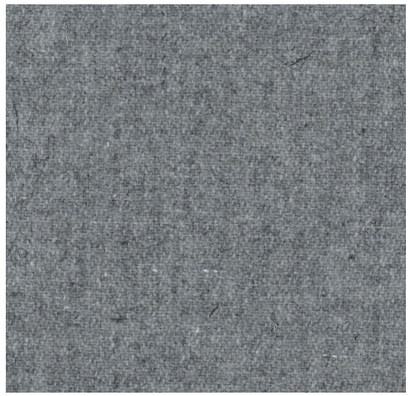
FA-LightGrey 1000

FA-Kiezel 7

FA-Ivory 101

FA-Naturel 1

FA-Beige 1037

FA-Dolphin 180

FA-Shitake 124

FA-DarkBrown 18

FA-Rust 29

FA-Taupe 1008

FA-Mint 50


FA-Azure 144

FA-Olive 53


FA-Army 14

FA-Zwart 1003


FA-MidGrey 1001

FA-Blue 45


FA-Petrol 56

Fabric

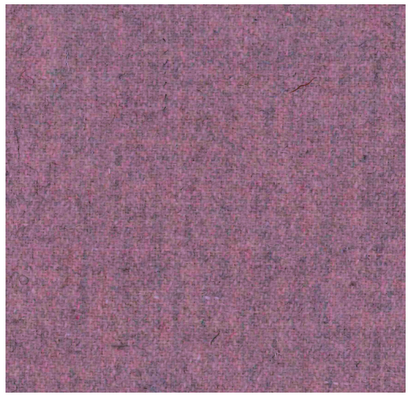
FA-Pink 73

FA-Purple 78

FA-Aubergine 74


FA-Prune 76

FA-Fuchsia 77

FA-Violet 72

FA-Navy 1007


FA-Indigo 90


FA-LightBlue 41


FA-Aqua 143


FA-OceanBlue 147

FA-Pistache 52


FA-Yellow 24


FA-Red 2011

FA-Fire 139


FA-Mandarin 129

FA-Orange 2012