# Array

1800

Design By Umut Yamac

The Array pendant lamp includes a series of technical filaments that are pulled taut between two rings through which the light rises creating a colour gradient. The cylindrical shape and intimate size make it perfect for small scale spaces.

VIBIA

Model Sheet

Finish		
	24	Beige M1 NCS S 2005-Y50R
	47	Green L1 NCS S 4005-G80Y
	37	Terra Red NCS S 4040-Y70R

LED temperature color	2700 K
Dimming	Push; DALI / 1-10V / Casambi
Instalation type	Remote Micro / Surface Canopy / Built-in S

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 22W 48V D ▷
LED	CRI>90 2662 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable IP20 Multi-volt 50-60Hz 1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.62 m x 0.62 m Gross weigth 7 Net weigth 4.8 Vol. 0.0461

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

max. 300 cm

73 cm

Ø 37 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]
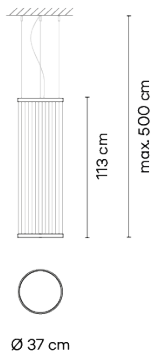

Array

1805

Design By Umut Yamac

The hanging Array lamp combines a series of fine technical filaments between two rings. Indirect light rises through the cylindrical shape forming a colour gradient.

VIBIA

Model Sheet

Finish	37 Terra Red NCS S 4040-Y70R
	47 Green L1 NCS S 4005-G80Y
	24 Beige M1 NCS S 2005-Y50R
LED temperature color	2700 K
Dimming	1-10V / Casambi / Push; DALI
Instalation type	Surface Canopy / Remote Micro / Built-in S
Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 22W 48V D ⟩
LED	CRI>90 2662 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable   IP20   Multi-volt
50-60Hz   1-10V

Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.62 m x 0.62 m Gross weigth 7.3 Net weigth 5.1 Vol. 0.0461

113 cm
max. 500 cm

Ø 37 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]
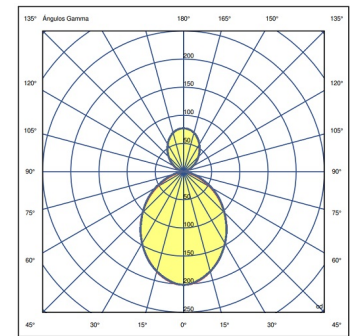
Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

## Photometric Data

Other Applications

Array

1810

Design By Umut Yamac

The large scale hanging cylindrical silhouette Array lamp wraps around the space rather than dominating it thanks to its spacious format of filaments that create a transparency through the volume it occupies.

Model Sheet

max. 300 cm

193 cm

Ø 37 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	
37	Terra Red NCS S 4040-Y70R
47	Green L1 NCS S 4005-G80Y
24	Beige M1 NCS S 2005-Y50R

LED temperature color	2700 K
Dimming	Casambi / Push; DALI / 1-10V
Instalation type	Built-in S / Surface Canopy / Remote Micro

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 22W 48V D
LED	CRI>90 2662 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable   IP20   Multi-volt
50-60Hz   1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.62 m x 0.62 m Gross weigth 7.6 Net weigth 5.4 Vol. 0.0461

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

Array

1815

Design By Umut Yamac

The hanging Array lamp includes a series of fine technical filaments pulled taut between two rings, where the light rises upwards creating a colour gradient. The cylindrical form and the intimate dimensions make it ideal for small spaces.

VIBIA

Model Sheet

Finish		
	47	Green L1
		NCS S 4005-G80Y
	24	Beige M1
		NCS S 2005-Y50R
	37	Terra Red
		NCS S 4040-Y70R

LED temperature color	2700 K
Dimming	1-10V / Push; DALI / Casambi
Instalation type	Built-in S / Remote Micro / Surface Canopy

Materials	Upper ring: Aluminum
	Bottom ring: Brass
	Diffuser: PC- Polycarbonate
	Threads: PES FR
Light source	1 x LED STRIP 33W 48V
	D
LED	CRI>90 3993 lm 121
	2700 K
Driver	Constant Voltage 90~305 V V
	50~60 Hz HZ

Dimmable IP20 Multi-volt 50-60Hz 1-10V

Application	Hanging lamps
Packaging	1 Box
	0.12 m x 0.62 m x 0.62 m
	Gross weigth 8.4
	Net weigth 6.2
	Vol. 0.0461

max.500 cm

73 cm

Ø 55 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]
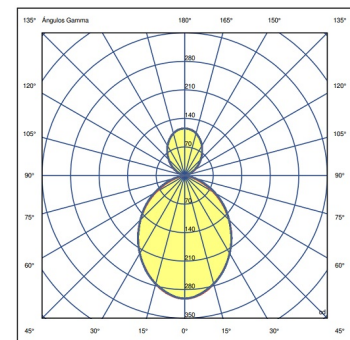
Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

Photometric Data


Other Applications

Array

1820

Design By Umut Yamac

The hanging Array lamp combines a series of fine technical filaments between two rings, The indirect light rises through the cylindrical form creating a colour gradient.

VIBIA

Model Sheet

Finish	24	Beige M1 NCS S 2005-Y50R
	37	Terra Red NCS S 4040-Y70R
	47	Green L1 NCS S 4005-G80Y

LED temperature color	2700 K
Dimming	1-10V / Casambi / Push; DALI
Instalation type	Surface Canopy / Built-in S / Remote Micro

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 33W 48V [D] ▷
LED	CRI>90 3993 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

[Dimmable] [IP20] [Multi-volt]
[50-60Hz] [◢ 1-10V]

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.62 m x 0.62 m Gross weigth 8.8 Net weigth 6.6 Vol. 0.0461

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

---

max. 300cm

113 cm

Ø 55 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]
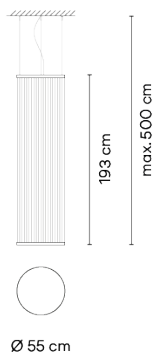

Array

1825

Design By Umut Yamac

The large-scale cylindrical silhouette hanging Array lamp wraps around the space rather than dominating it thanks to the spacious spread of the filaments creating a more translucent volume. Evoking an ethereal visual sensation.

Model Sheet

193 cm
max.500 cm

Ø 55 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish		
	24	Beige M1
		NCS S 2005-Y50R
	47	Green L1
		NCS S 4005-G80Y
	37	Terra Red
		NCS S 4040-Y70R

LED temperature color   2700 K

Dimming   1-10V / Push; DALI / Casambi

Instalation type   Surface Canopy / Built-in S / Remote Micro

Materials
Upper ring: Aluminum
Bottom ring: Brass
Diffuser: PC- Polycarbonate
Threads: PES FR

Light source   1 x LED STRIP 33W 48V
[D]

LED   CRI>90 3993 lm 121
2700 K

Driver   Constant Voltage 90~305 V V
50~60 Hz HZ

[Dimmable] [IP20] [Multi-volt]
[50-60Hz] [1-10V]

Application   Hanging lamps

Packaging
1 Box
0.12 m x 0.62 m x 0.62 m
Gross weigth 9.2
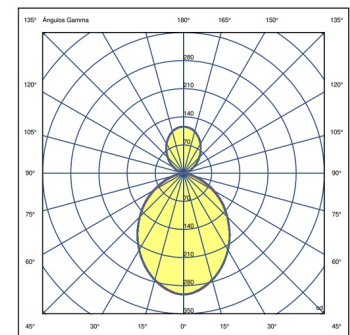Net weigth 7
Vol. 0.0461

## Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Array

1830

Design By Umut Yamac

The hanging Array lamp combines a series of fine technical filaments between tow rings. The indirect lighting rises through the cylindrical form creating a colour gradient.

VIBIA

Model Sheet

Ø 83 cm

max. 300cm
113 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish		
24	Beige M1	NCS S 2005-Y50R
37	Terra Red	NCS S 4040-Y70R
47	Green L1	NCS S 4005-G80Y

LED temperature color	2700 K
Dimming	Push; DALI / 1-10V / Casambi
Instalation type	Surface Canopy / Built-in S / Remote Micro

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 50W 48V D >
LED	CRI>90 6050 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable | IP2O | Multi-volt
50-60Hz | 1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.93 m x 0.93 m Gross weigth 15.6 Net weigth 10.1 Vol. 0.1037

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data


Other Applications

Array

1835

Design By Umut Yamac

The large scale hanging cylindrical silhouette Array lamp wraps around the space rather than dominating it thanks to the spacious spread of the filaments creating a translucence through the volume it occupies.

VIBIA

Model Sheet

max. 300cm

193 cm

Ø 82 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	
	24 Beige M1
	NCS S 2005-Y50R
	37 Terra Red
	NCS S 4040-Y70R
	47 Green L1
	NCS S 4005-G80Y

LED temperature color	2700 K
Dimming	1-10V / Push; DALI / Casambi
Instalation type	Remote Micro / Built-in S / Surface Canopy

|	
Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 50W 48V D
LED	CRI>90 6050 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable IP20 Multi-volt
50-60Hz 1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.93 m x 0.93 m Gross weigth 15 Net weigth 9.5 Vol. 0.1037

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

**Other Applications**

Array

1840

Design By Umut Yamac

The hanging Array lamp combines a series of fine technical filaments between two rings. The indirect lighting rises through the cylindrical form creating a colour gradient.

Model Sheet

113 cm   max.300cm

Ø 124 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish		
	24	Beige M1 NCS S 2005-Y50R
	47	Green L1 NCS S 4005-G80Y
	37	Terra Red NCS S 4040-Y70R

LED temperature color	2700 K
Dimming	Casambi / Push; DALI / 1-10V
Instalation type	Built-in S / Surface Canopy / Remote Micro

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 76W 48V ⬚ D ▷
LED	CRI>90 9196 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

[Dimmable] [IP20] [Multi-volt]
[50-60Hz] [◢ 1-10V]

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 1.35 m x 1.35 m Gross weigth 23 Net weigth 13 Vol. 0.2187

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

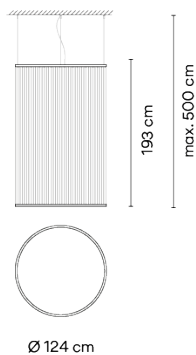**Other Applications**

Array

1845

Design By Umut Yamac

The large-scale cylindrical silhouette hanging Array lamp wraps around the space rather than dominating it thanks to the spacious spread of the filament creating a translucence through the volume it occupies.

VIBIA

Model Sheet

Finish		
	37	Terra Red NCS S 4040-Y70R
	24	Beige M1 NCS S 2005-Y50R
	47	Green L1 NCS S 4005-G80Y

LED temperature color 2700 K

Dimming Casambi / 1-10V / Push; DALI

Instalation type Remote Micro / Surface Canopy / Built-in S

Materials
Upper ring: Aluminum
Bottom ring: Brass
Diffuser: PC- Polycarbonate
Threads: PES FR

Light source 1 x LED STRIP 76W 48V
[D]

LED CRI>90 9196 lm 121
2700 K

Driver Constant Voltage 90~305 V V
50~60 Hz HZ

[Dimmable] [IP20] [50-60Hz]
[1-10V]

Application Hanging lamps

Packaging
1 Box
0.12 m x 1.35 m x 1.35 m
Gross weigth 23.9
Net weigth 13.9
Vol. 0.2187

193 cm
max. 500 cm

Ø 124 cm

Optional : Extra cable length
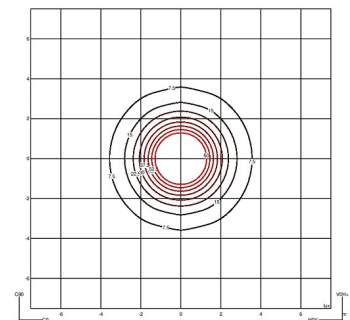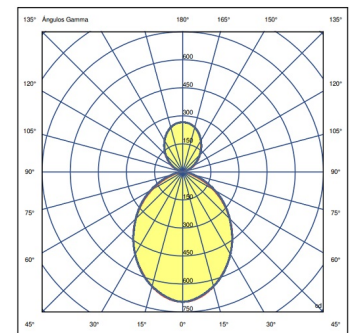Min. quantity, upcharge and extra lead time apply [EN]

Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

Photometric Data
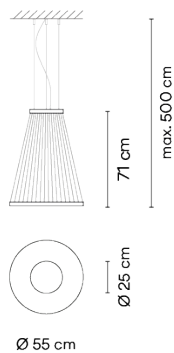
Other Applications

Array

1850

Design By Umut Yamac

The Array hanging lamp includes a series of technical filaments pulled taut between two rings where the light rises creating a colour gradient. The conical shape and intimate dimensions make it ideal for small spaces.

VIBIA

Model Sheet

Finish	37 Terra Red
	NCS S 4040-Y70R
	24 Beige M1
	NCS S 2005-Y50R
	47 Green L1
	NCS S 4005-G80Y

| LED temperature color | 2700 K |

| Dimming | Push; DALI / Casambi / 1-10V |

| Instalation type | Built-in S / Surface Canopy / Remote Micro |

Materials	Upper ring: Aluminum
	Bottom ring: Brass
	Diffuser: PC- Polycarbonate
	Threads: PES FR

| Light source | 1 x LED STRIP 33W 48V |
| | [D] |

| LED | CRI>90 3993 lm 121 |
| | 2700 K |

| Driver | Constant Voltage 90~305 V V |
| | 50~60 Hz HZ |

Dimmable   IP20   Multi-volt
50-60Hz   1-10V

| Application | Hanging lamps |

Packaging	1 Box
	0.12 m x 0.62 m x 0.62 m
	Gross weigth 7.9
	Net weigth 5.7
	Vol. 0.0461

max. 500 cm

71 cm

Ø 25 cm

Ø 55 cm

Optional : Extra cable length
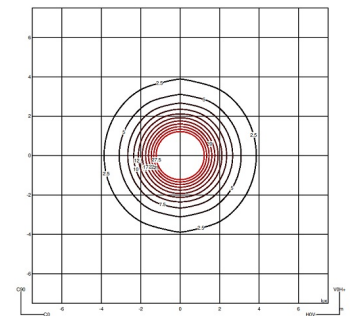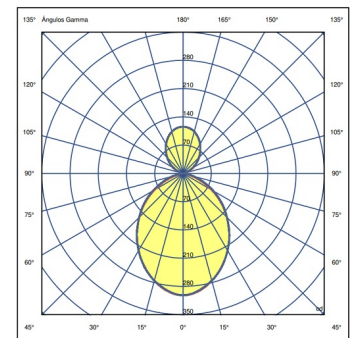Min. quantity, upcharge and extra lead time apply [EN]

Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

Photometric Data
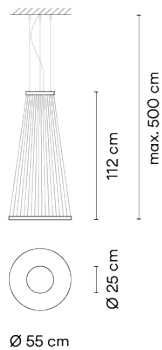

Other Applications

Array

1855

Design By Umut Yamac

The Array hanging lamp combines a series of fine technical filaments between two rings. The indirect light rises through its conical shape forming a colour gradation.

Model Sheet

Finish		
	47	Green L1
		NCS S 4005-G80Y
	24	Beige M1
		NCS S 2005-Y50R
	37	Terra Red
		NCS S 4040-Y70R

LED temperature color	2700 K
Dimming	Casambi / 1-10V / Push; DALI
Instalation type	Surface Canopy / Built-in S / Remote Micro

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 33W 48V D
LED	CRI>90 3993 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable   IP20   Multi-volt
50-60Hz   1-10V

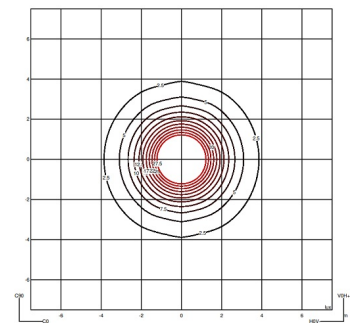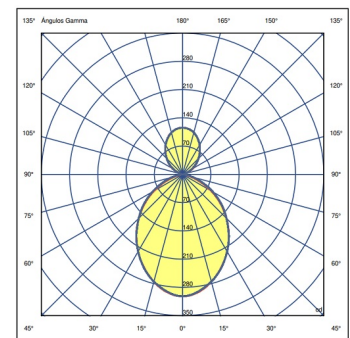|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.62 m x 0.62 m Gross weigth 8.3 Net weigth 6.1 Vol. 0.0461

Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

Dimensions

max. 500 cm
112 cm
Ø 25 cm
Ø 55 cm

Optional : Extra cable length
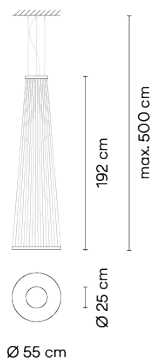Min. quantity, upcharge and extra lead time apply [EN]

Array

1860

Design By Umut Yamac

The large-scale conical silhouette hanging Array lamp wraps around the space rather than dominating it thanks to the spacious spread of the filaments creating a translucence through the volume it occupies.

Model Sheet

Finish	37 Terra Red	NCS S 4040-Y70R
	47 Green L1	NCS S 4005-G80Y
	24 Beige M1	NCS S 2005-Y50R

LED temperature color 2700 K

Dimming 1-10V / Push; DALI / Casambi

Instalation type Built-in S / Surface / Remote Micro


Materials
Upper ring: Aluminum
Bottom ring: Brass
Diffuser: PC- Polycarbonate
Threads: PES FR

Light source 1 x LED STRIP 33W 48V
D

LED CRI>90 3993 lm 121
2700 K

Driver Constant Voltage 90~305 V V
50~60 Hz HZ

Dimmable | IP20 | Multi-volt
50-60Hz | 1-10V

Application Hanging lamps

Packaging
1 Box
0.12 m x 0.62 m x 0.62 m
Gross weigth 8.7
Net weigth 6.5
Vol. 0.0461

Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

max. 500 cm
192 cm
Ø 25 cm
Ø 55 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Array

1865

Design By Umut Yamac

The hanging Array lamp combines a series of fine technical filaments between two rings. The indirect light rises through the conical shape to create a colour gradient.

VIBIA

Model Sheet

Finish		
	24	Beige M1 NCS S 2005-Y50R
	37	Terra Red NCS S 4040-Y70R
	47	Green L1 NCS S 4005-G80Y

LED temperature color	2700 K
Dimming	Push; DALI / Casambi / 1-10V
Instalation type	Remote Micro / Surface Canopy / Built-in S

|	
Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 50W 48V
	D
LED	CRI>90 6050 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable IP20 Multi-volt
50-60Hz 1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.93 m x 0.93 m Gross weigth 14.3 Net weigth 8.8 Vol. 0.1037

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

max. 300 cm
110 cm
Ø 37 cm
Ø 82 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Array

1870

Design By Umut Yamac

The large-scale conical silhouette hanging Array lamp wraps around the space rather than dominating it hanks to the spacious spread of the filaments creating a translucence through the volume it occupies.

Model Sheet

Finish		
	37	Terra Red NCS S 4040-Y70R
	47	Green L1 NCS S 4005-G80Y
	24	Beige M1 NCS S 2005-Y50R

LED temperature color	2700 K
Dimming	1-10V / Push; DALI / Casambi
Instalation type	Built-in S / Remote Micro / Surface Canopy

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 50W 48V D
LED	CRI>90 6050 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable | IP20 | Multi-volt
50-60Hz | 1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 0.93 m x 0.93 m Gross weigth 14.9 Net weigth 9.4 Vol. 0.1037

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

max. 300 cm

191 cm

Ø 37 cm

Ø 82 cm

Optional : Extra cable length
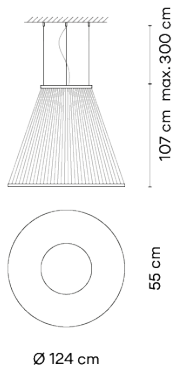Min. quantity, upcharge and extra lead time apply [EN]

Array

1875

VIBIA

Design By Umut Yamac

The hanging Array lamp combines a series of fine technical filaments between two rings. The indirect light rises through its conical shape creating a colour gradient. The combination of shape, texture and luminosity offers an ephemeral visual sensation.

Model Sheet

Finish		
	24	Beige M1
		NCS S 2005-Y50R
	37	Terra Red
		NCS S 4040-Y70R
	47	Green L1
		NCS S 4005-G80Y

LED temperature color	2700 K
Dimming	1-10V / Casambi / Push; DALI
Instalation type	Built-in S / Remote Micro / Surface Canopy

|	
Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 76W 48V D ▷
LED	CRI>90 9196 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable IP20 Multi-volt 50-60Hz 1-10V

|	
Application	Hanging lamps
Packaging	1 Box 0.12 m x 1.35 m x 1.35 m Gross weigth 21.9 Net weigth 11.9 Vol. 0.2187

Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications

107 cm max.300 cm

55 cm

Ø 124 cm

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Array

1880
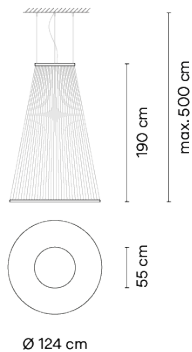
VIBIA

Design By Umut Yamac

The large-scale conical silhouette hanging Array lamp wraps around the space rather than dominating it thanks to the spacious spread of the filaments creating a translucency through the volume it occupies.

Model Sheet

Finish		
	47	Green L1 NCS S 4005-G80Y
	37	Terra Red NCS S 4040-Y70R
	24	Beige M1 NCS S 2005-Y50R

LED temperature color	2700 K
Dimming	Push; DALI / Casambi / 1-10V
Instalation type	Surface Canopy / Remote Micro / Built-in S

Materials	Upper ring: Aluminum Bottom ring: Brass Diffuser: PC- Polycarbonate Threads: PES FR
Light source	1 x LED STRIP 76W 48V D
LED	CRI>90 9196 lm 121 2700 K
Driver	Constant Voltage 90~305 V V 50~60 Hz HZ

Dimmable IP20 Multi-volt
50-60Hz 1-10V

Application	Hanging lamps
Packaging	1 Box 0.12 m x 1.35 m x 1.35 m Gross weigth 22.8 Net weigth 12.8 Vol. 0.2187

190 cm
max.500 cm
55 cm
Ø 124 cm

Optional : Extra cable length
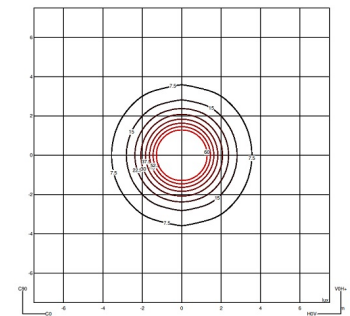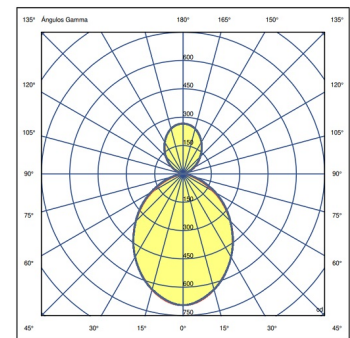Min. quantity, upcharge and extra lead time apply [EN]

Lighting effect

General lighting
Lamp for general lighting that equally distributes the light in all directions.

Photometric Data

Other Applications