



BuzziHat 220-240V **Product Specification Sheet**

This document contains technical
information about the BuzziHat



www.buzzi.space



Say goodbye to noisy environments with BuzziHat.

A decorative and highly recognizable hat-shaped pendant light with excellent sound absorption capabilities. Its unique design, combining an upholstered part with a metal shade is bound to steal the attention in any space. The upholstered foam body is available in a wide palette of color and fabric combinations, while the metal shade and ring come in 4 finishes (black, white, beige red and gold). Mix colors of your choosing and match the fabric of BuzziHat with the color of your furniture to create an impeccable setting. BuzziHat is available in different sizes to fit different sonic environments which makes it the ultimate acoustic lighting for any office, lobby or restaurant that needs acoustic absorption treatment combined with high-quality lighting.

Design by Alain Gilles

General



Ceiling Suspended

S | M | L | XL

Upholstered acoustic foam element

Powder coated metal shade and ring



LED disk with opaque diffuser

Powder coated metal ceiling canopy in white (RAL 9010)

Transparent power cable

Wattage: 19 W

Input Voltage: 220 - 240V

Input Frequency: 50/60Hz



Lumen Output: 2000 lumen

Color Temperature: 3000K

Color Rendering Index: < 90

Unified glare rating: 20

Dimmable: 1-10V Protocol



IP20 Dry Usage



Assembled



If installing on suspended ceiling, verify load capacity prior to installation

Certifications

CE/CB

Acoustics



Absorption




Diffusion

Content

Configurations	3	Fabrics	6
Composition	5	Dimensions	10


Configurations

BuzziHat Suspended S

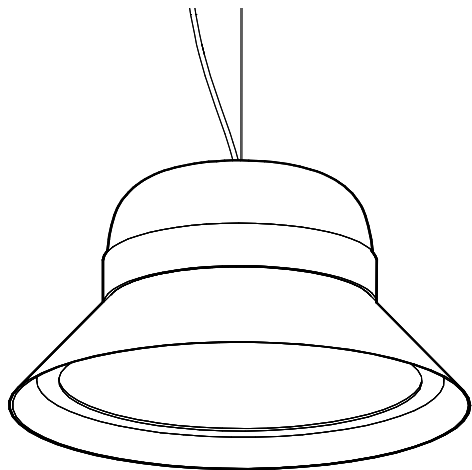


- 🔑 Ceiling Suspended
- Upholstered acoustic foam element
- Powder coated metal shade and ring
- 🌲 LED disk with opaque diffuser
- Powder coated metal ceiling canopy in white (RAL 9010)
- Transparent power cable
- ✂ S: Ø 52 cm H: 28 cm
- ⚖ 6,5 kg
- ... Powder coated metal shade and decorative ring in black (RAL 9005), white (RAL 9010), beige red (RAL 3012) or gold
- Black or alu cable 2 - 5 m
- ⚠ If installing on suspended ceiling, verify load capacity prior to installation

BuzziHat Suspended M

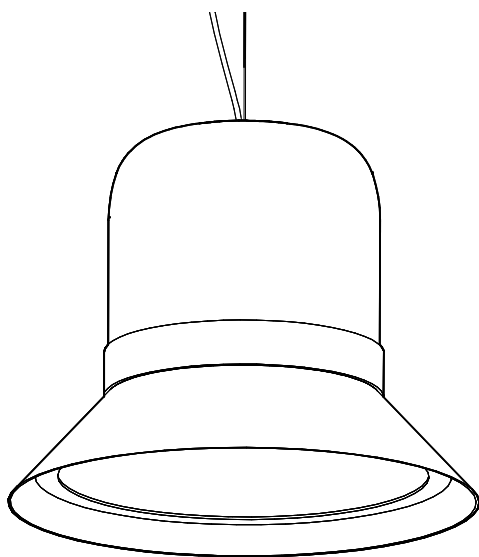

- 🔑 Ceiling Suspended
- Upholstered acoustic foam element
- Powder coated metal shade and ring
- 🌲 LED disk with opaque diffuser
- Powder coated metal ceiling canopy in white (RAL 9010)
- Transparent power cable
- ✂ M: Ø 52 cm H: 42 cm
- ⚖ 7 kg
- ... Powder coated metal shade and decorative ring in black (RAL 9005), white (RAL 9010), beige red (RAL 3012) or gold
- Black or alu cable 2 - 5 m
- ⚠ If installing on suspended ceiling, verify load capacity prior to installation

BuzziHat Suspended L

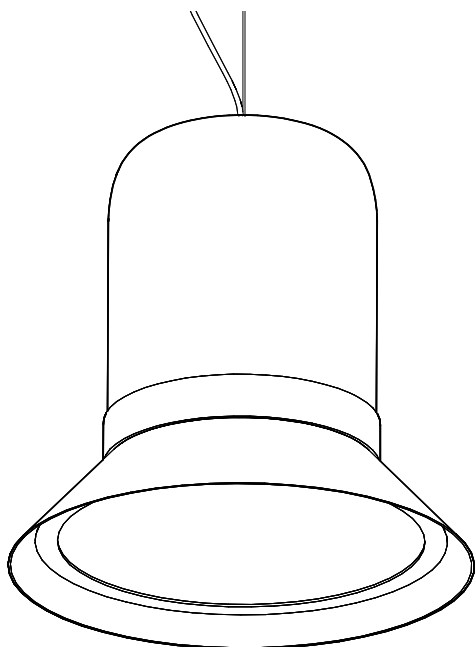

🔖 Ceiling Suspended

Upholstered acoustic foam element
Powder coated metal shade and ring



LED disk with opaque diffuser

Powder coated metal ceiling canopy in white (RAL 9010)
Transparent power cable



L: Ø 52 cm H: 52 cm



7,5 kg




Powder coated metal shade and decorative ring in
black (RAL 9005), white (RAL 9010), beige red (RAL 3012)
or gold
Black or alu cable 2 - 5 m



If installing on suspended ceiling, verify load capacity prior to installation

BuzziHat Suspended XL

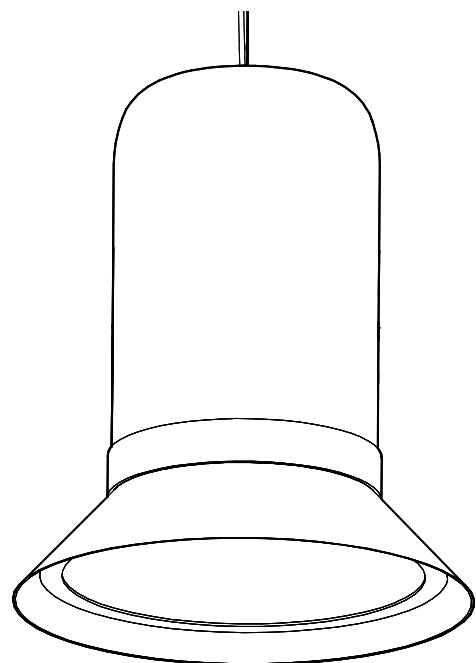

🔖 Ceiling Suspended

Upholstered acoustic foam element
Powder coated metal shade and ring



LED disk with opaque diffuser

Powder coated metal ceiling canopy in white (RAL 9010)
Transparent power cable



XL: Ø 52 cm H: 62 cm



8 kg



Powder coated metal shade and decorative ring in
Black (RAL 9005), White (RAL 9010), Beige Red (RAL 3012)
or gold
Black or alu cables 2 - 5 m



If installing on suspended ceiling, verify load capacity prior to installation


Composition

LED Disk



The PMMA diffuser ensures an optimal light spread and efficiency. It creates a very diffuse light surface without any dottiness.

To enlight your workplace or room with optimal lux levels take following measures into account.

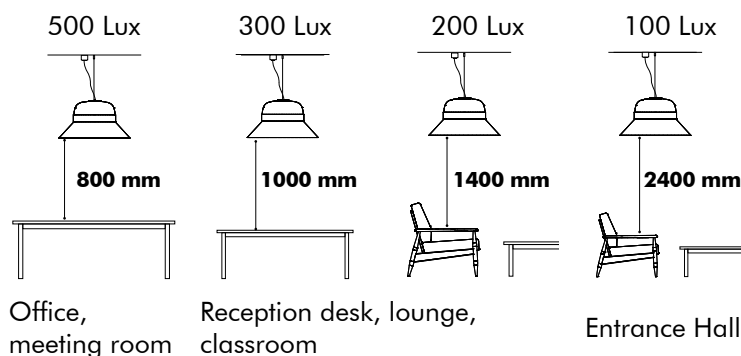

* According to EN12464

Mix and Match



Customize your BuzziHat by mixing and matching the color of the ring, the shade and the upholstery fabric.


Ceiling canopy and power cord



Suspension set consists of a:

- metal ceiling canopy powder coated in white
- transparent power cable (length 5m)
- separate silver metal cables to suspend the Buzzihat (in alu or black 2 or 5m)

Rough




RO-Taffy
185

Composition 100% Polyacryl
Weight 456 g/m² | 13.45 oz/yd²
Width 148 cm | 58.27"
Thickness 1,2 mm | 0.047"
Abrasion resistance 40.000 Martindale
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
US: CAL TB 117
Fastness to light EU: 5
Fastness to rubbing EU: Wet: 3 | Dry: 3
Maintenance Vacuum clean regularly. Don't wash. Don't remove the Rough from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.




CAT A

FABRIC
ROUGH
TREVIRA CS+
TREVIRA CS
REVIVE 1
REVIVE 2




RO-Champagne
186



RO-Coffee
81



RO-Celery
80




RO-Lemon
122




RO-Lime
157



RO-Olive
53




RO-Turtle
88



RO-Forest
162




RO-Ash
40




RO-Dolphin
180




RO-Charcoal
79




RO-Denim
153




RO-IceBlue
43




RO-LightBlue
41




RO-Niagara
158




RO-Hunter
156




RO-SkyBlue
142



RO-Estate
152



RO-Hyacinth
159



RO-Imperial
189





RO-LolliPop
187





RO-Dahlia
188

Dimensions



BuzziHat S

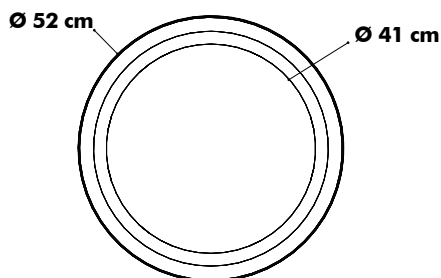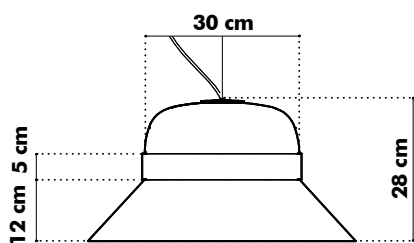



BuzziHat M

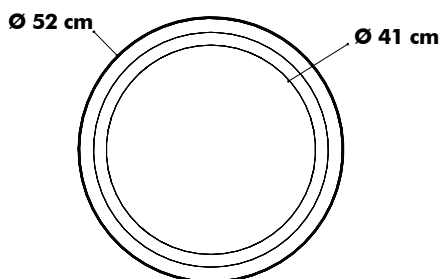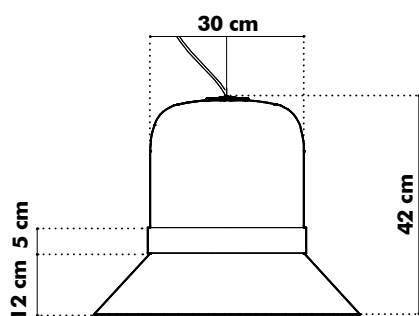


BuzziHat L

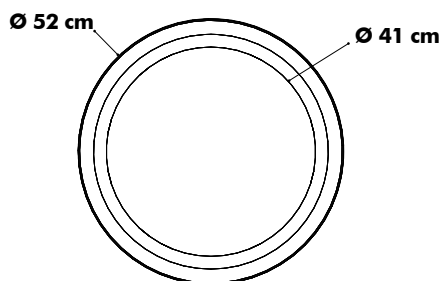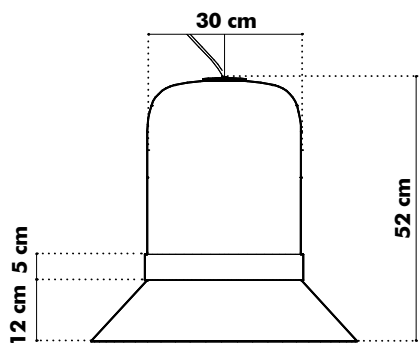

BuzziHat XL

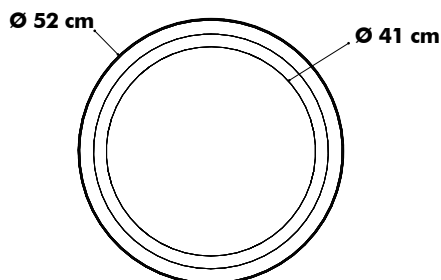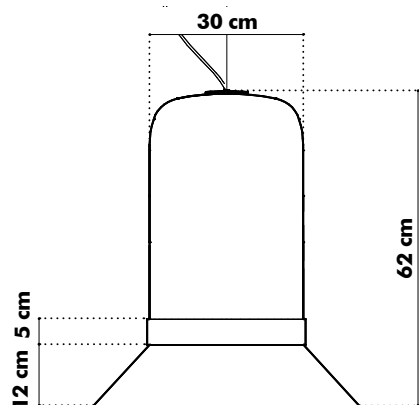


Suspension Set

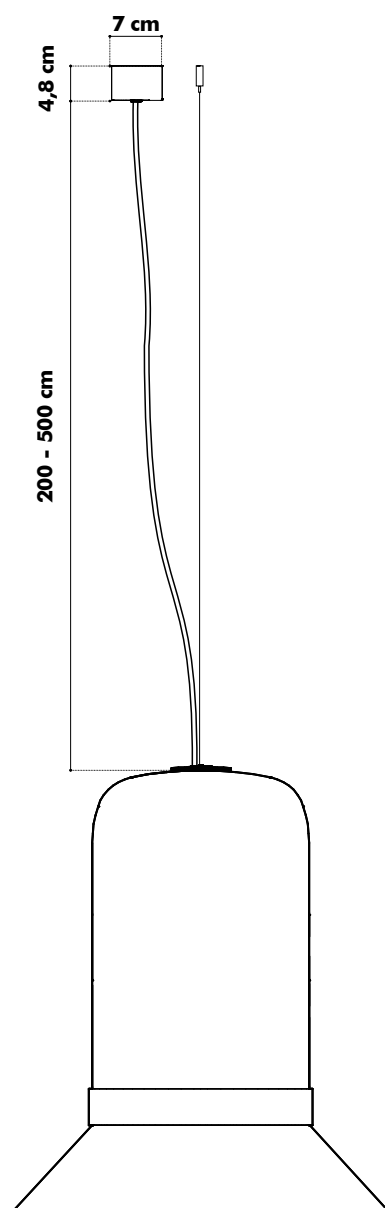

Acoustics

BuzziHat


Equivalent sound absorption area in m² per object

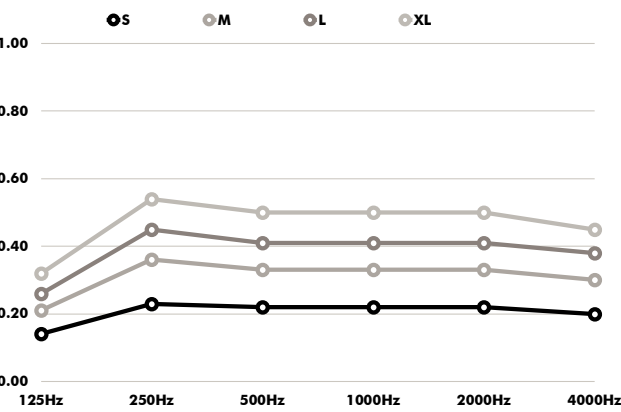

Hz	S Aeq/m²	M Aeq/m²	L Aeq/m²	XL Aeq/m²
125	0.14	0.21	0.26	0.32
250	0.23	0.36	0.45	0.54
500	0.22	0.33	0.41	0.50
1000	0.22	0.33	0.41	0.50
2000	0.22	0.33	0.41	0.50
4000	0.20	0.30	0.38	0.45

Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Revive 2

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 420 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²


Abrasion resistance > 100.000 Martindale

Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5


Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4



Clara 2

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 2

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero

kvadrat



Category C

Composition 96% new wool, 4% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Tonus Meadow

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 3, EN ISO 12945



Memory 2

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945



Matrix

kvadrat



Category F

Composition 100% Trevira CS

Weight 760 g/lin.m

Abrasion resistance

App. 60.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 crib 5 | BS 5867 part 2 type B
DIN 4102 B1 | Önorm B1/Q1 | NF D 60 013
UNI 9175 1IM | US Cal. Tech. Bull. 117 | NFPA 701
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945

