



Table lamp for indirect lighting with a 4 W LED source. Light intensity is adjustable through a touch dimmer on metal base. Aluminium structure with transparent glass diffuser.

### Finishing

#### Standard

 Anodised black  
cod. 14101X000

 Anodised brass  
cod. 14150X000

All RAL coating and galvanic finishes available upon request

### Light emission



- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 350 lm
- Emitted flux: 73 lm
- Efficacy: 12,1 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

### Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal dimmer with touch-on-metal interface
- Energy class: A++

### Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,25 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

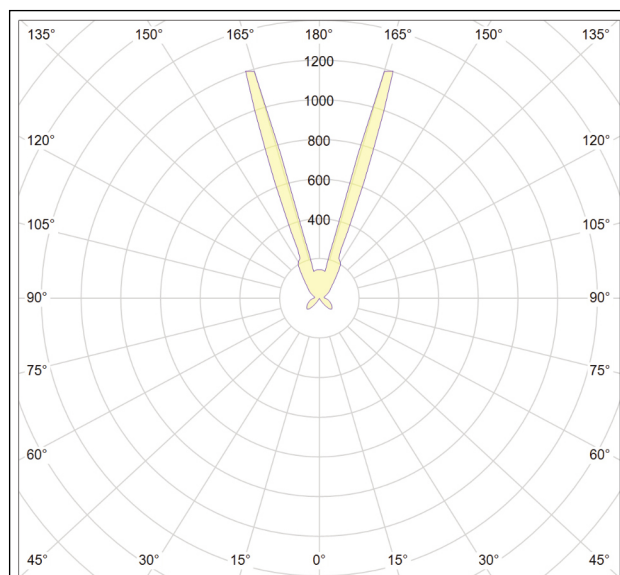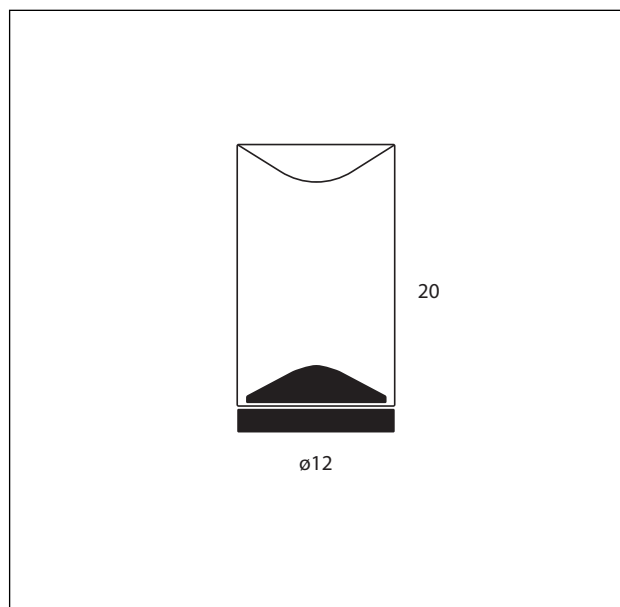

**Packaging**  
cardboard box  
21 x 21 x 27 (cm)  
0,012 m<sup>3</sup>

**Gross weight**  
1,7 Kg




Table lamp for indirect lighting with a 4 W LED source. Light intensity is adjustable through a touch dimmer on metal base. Aluminium structure with transparent glass diffuser.

### Finishing

#### Standard

Anodised black  
cod. 14101X0K27

Anodised brass  
cod. 14150X0K27

All RAL coating and galvanic finishes available upon request

### Light emission



- Light emission: diffuse
- Light direction: indirect downlight
- Light source: led board
- Source flux: 330 lm
- Emitted flux: 70 lm
- Efficacy: 11,6 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >50000h L70 @ 25°C

### Electrical Facts

- Source power: 4 W
- Power absorption: 5 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal dimmer with touch-on-metal interface
- Energy class: A++

### Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,25 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

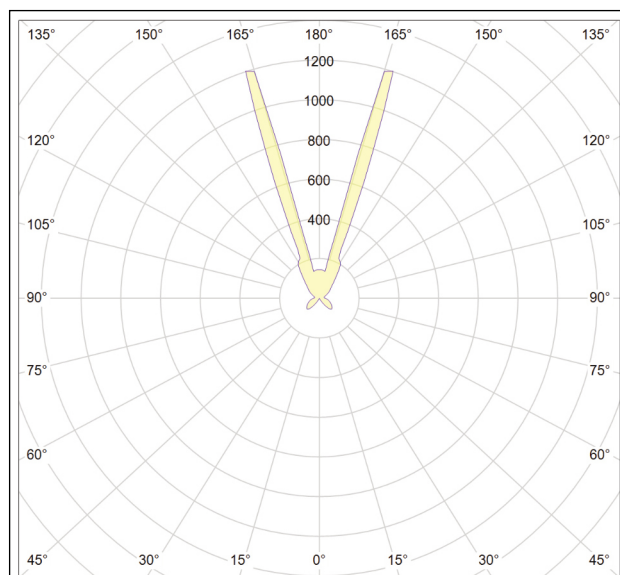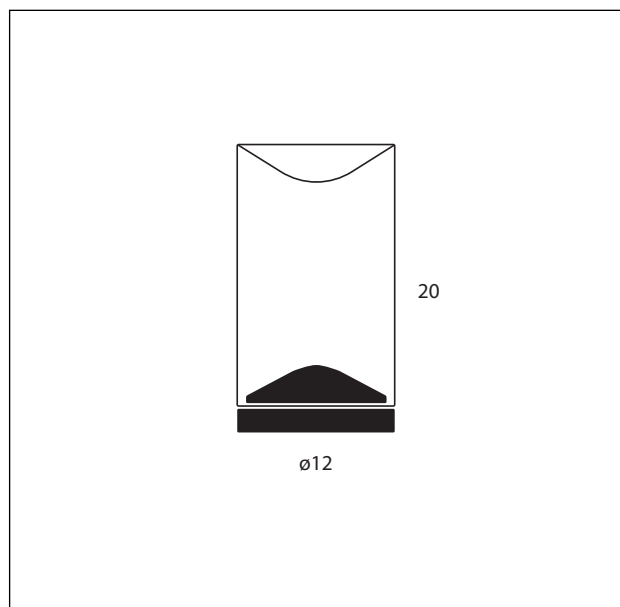

**Packaging**  
cardboard box  
21 x 21 x 27 (cm)  
0,012 m<sup>3</sup>

**Gross weight**  
1,7 Kg