

Top

Design by Ramos & Bassols.

Reference

1170.

Application

Ceiling Lamps

Installation type

Surface

Description

Top is a ceiling lamp with surface installation. It features simple lines that blend in with the ceiling as much as possible. The light reflected by the glass diffuser is confined within the rosette, as if the light were framed.

Diffuser

Mat opal triplex blown-glass diffuser


Materials

Body: Aluminum
Ceiling rose: Aluminum
Diffuser: Opal blown-glass

Finish

-  **1170-10** White (NCS S 0300-N)
-  **1170-36** Soft Pink (NCS S 1010-Y50R)
-  **1170-40** Blue L1 (NCS S 3010-B)
-  **1170-47** Green L1 (NCS S 4005-G80Y)

Sketch




Electrical characteristics

3 x LED 13,4W 700mA

Total 40.2 W



VIBIA

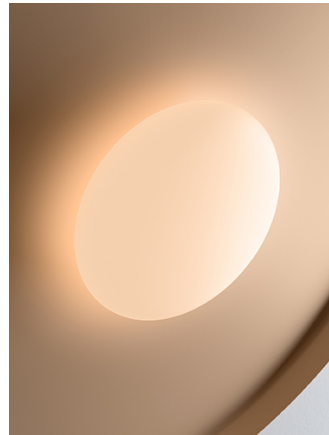

Light source: 2700K CRI >90 3300 lm 82 lm/W

Driver included: CC - Constant Current 700 mA 220~240V 50/60Hz

Electronic dimming: DALI 1-10V Push

Optional dimming: Casambi

Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.4327 m³ /
Gross weight 7.7 kg. / Net weight 5.3 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 66.69 lm/W

Coordinate system : CG

Total flux : 3103.46 lm

Maximum value : 813.96 c


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

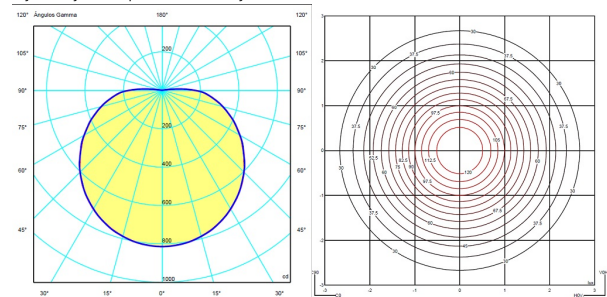

Certificates

