




PIRRO

CEILING RECESSED



p. 291



1.0

LED 4.5W | 500mA | 9V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.09 kg IP20 \varnothing 0.3° Δ 32°

50x50 85 4-25

CODE	
	150151E_
	150151J_
	150151K_
	150151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	405	>90	5



ALWAYS USE

power supply | 500mA

	CODE
7W dim	90224301
10W DALI	90244401

more power supplies on page 695

available from summer 2020

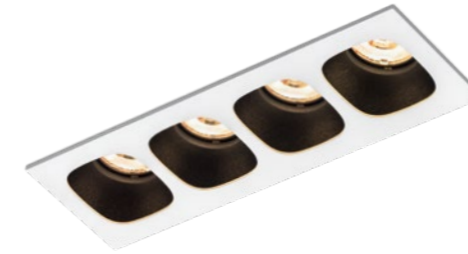

2.0

2x LED 4.5W | 500mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.155 kg IP20 \varnothing 0.3° Δ 32°

93x50 60 4-25

CODE	
	150251E_
	150251J_
	150251K_
	150251B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5

ALWAYS USE

power supply | 500mA (1 piece needed)

	CODE
15W dim	90224602
20W DALI	90244603

more power supplies on page 695



4.0

4x LED 4.5W | 500mA | 36V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.28 kg IP20 \varnothing 0.3° Δ 32°

181x50 60 4-25

CODE	
	150451E_
	150451J_
	150451K_
	150451B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

ALWAYS USE

power supply | 500mA (1 piece needed)

	CODE
20W dim	90224602
20W DALI	90244602

more power supplies on page 695

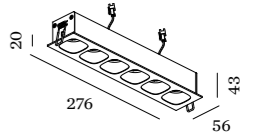

6.0

6x LED 4.5W | 500mA | 2x27V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.40 kg IP20 \varnothing 0.3° Δ 32°

269x50 60 4-25

CODE	
	150651E_
	150651J_
	150651K_
	150651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x380	>90	3
3000K	6x405	>90	5

ALWAYS USE

power supply | 500mA (2 pieces needed)

	CODE
20W dim	90224602
20W DALI	90244602

more power supplies on page 695