


#09

[trizo]²¹[®]

Handmade in Belgium

Austere

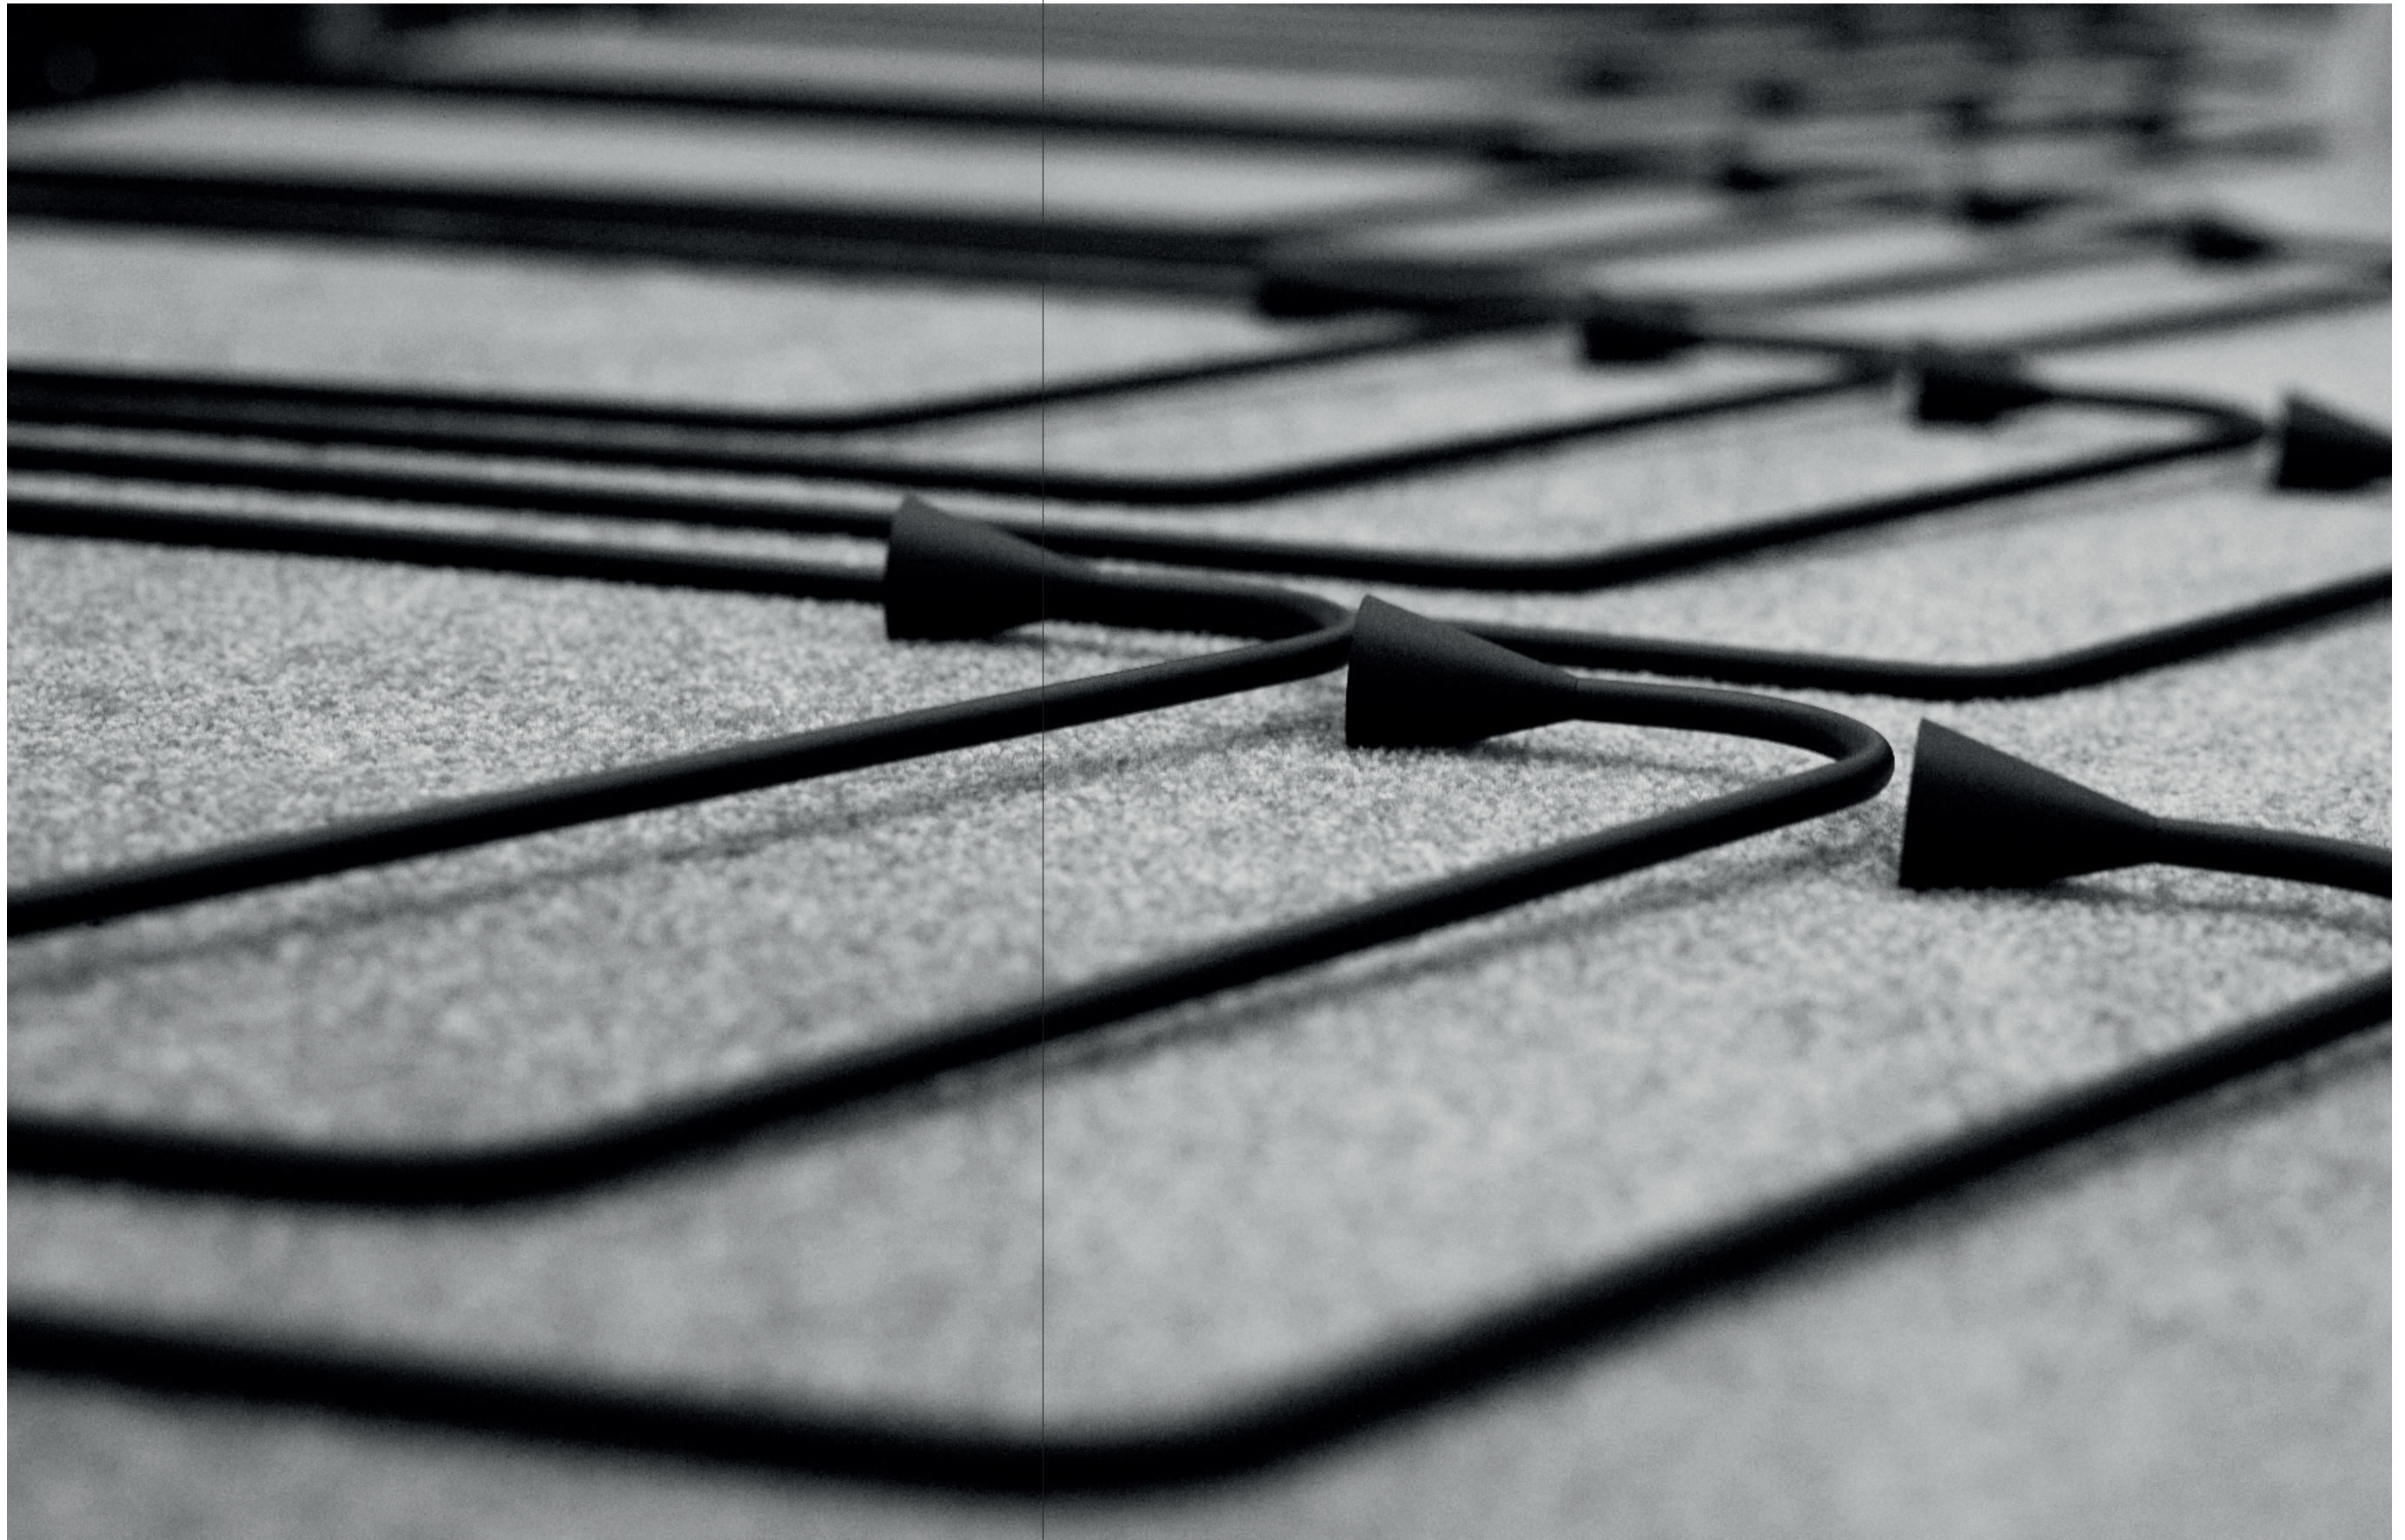

design by
Hans Verstuyft

Austere- Chandelier

design by
Hans Verstuyft

The Austere-Chandelier allows you to create unique compositions with depth. A well-thought-out combination of the various components will create real eye-catchers that look magnificent in lobbies, reception areas or dining rooms.

You can opt for an explosion of light or opt for fine chandeliers that provide an 'Austere' ambiance. The puzzle pieces are ready to be composed into a unique fixture and chandelier combination.

Austere-Chandelier 3Y RL 79 black





Austere-Chandelier 3Y RL 79 brass

Austere-Chandelier

design by
Hans Verstuyft



Austere-Chandelier 2X RL 79 brass



Austere-Chandelier 1X RF 100 brass



Austere-Elements black



Austere-Elements brass

Austere-Elements

Design your Austere-Elements composition with the application :

www.elements-configurator.trizo21.com



Austere-Elements brass

Austere-Floor

design by
Hans Verstuyft



Austere-Floor brass



Austere-Floor black



Austere-Floor gunmetal



Austere-Solitaire RF 100 Track 48V black

Austere-Solitaire

design by
Hans Verstuyft



Austere-Solitaire RF black



Austere-Suspension RL 79 Custom brass



Austere-Suspension RF 75 brass

Austere- Suspension

design by
Hans Verstuyft



Austere-Table black

Austere-Table


design by
Hans Verstuyft



Austere-Table brass



Austere-Table black

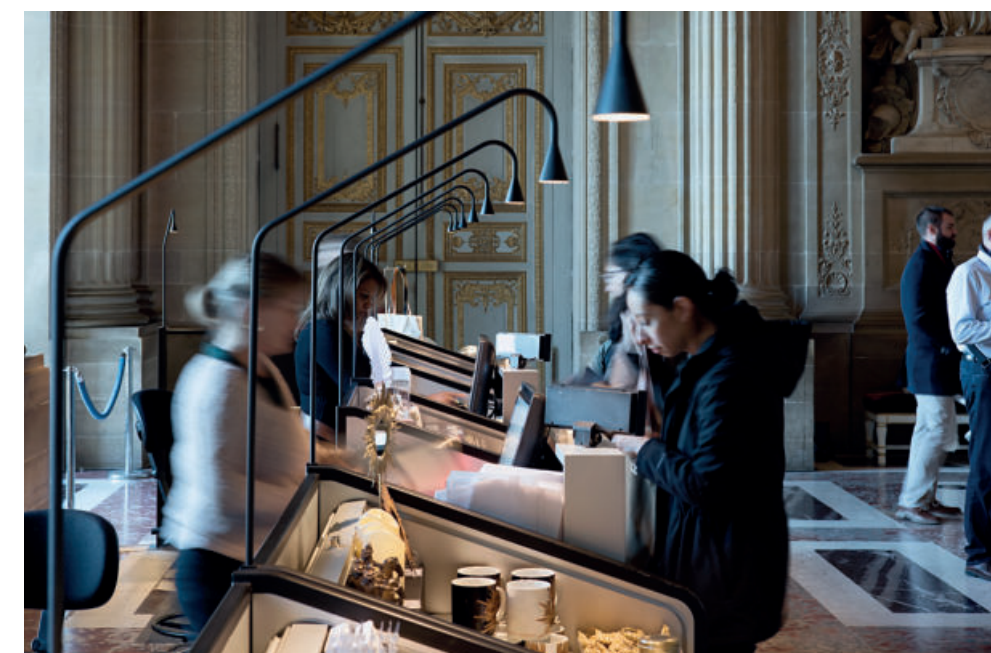

Austere-Table

Custom



Austere-Wall brass

Austere-Wall

Austere-Wall

design by
Hans Verstuyft




Austere-Wall gunmetal



Austere-Wall black




Austere-Wall brass



Austere-Floor

100V-240V - **plugdriver with  (PUSH-DIM) button on cable**
1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93
The base bracket is standard included and recommended for optimal stability.
FLOOR -   

DIM		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug		HVFL 1003	HVFL 1002	HVFL 1001			
EU plug					HVFL 1004	HVFL 1007	HVFL 1009
UK plug		HVFL 1003UK	HVFL 1002UK	HVFL 1001UK			
UK plug					HVFL 1004UK	HVFL 1007UK	HVFL 1009UK
US plug		HVFL 1003US	HVFL 1002US	HVFL 1001US			
US plug					HVFL 1004US	HVFL 1007US	HVFL 1009US
AU plug		HVFL 1003AU	HVFL 1002AU	HVFL 1001AU			
AU plug					HVFL 1004AU	HVFL 1007AU	HVFL 1009AU





Austere-Table

100V-240V - **plugdriver with  (PUSH-DIM) button on cable**
1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93
TABLE -   

DIM		FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug		HVTA 1003	HVTA 1002	HVTA 1001			
EU plug					HVTA 1004	HVTA 1007	HVTA 1009
UK plug		HVTA 1003UK	HVTA 1002UK	HVTA 1001UK			
UK plug					HVTA 1004UK	HVTA 1007UK	HVTA 1009UK
US plug		HVTA 1003US	HVTA 1002US	HVTA 1001US			
US plug					HVTA 1004US	HVTA 1007US	HVTA 1009US
AU plug		HVTA 1003AU	HVTA 1002AU	HVTA 1001AU			
AU plug					HVTA 1004AU	HVTA 1007AU	HVTA 1009AU

AUSTERE-ELEMENTS

Design your own unique composition with our configurator:
www.elements-configurator.trizo21.com

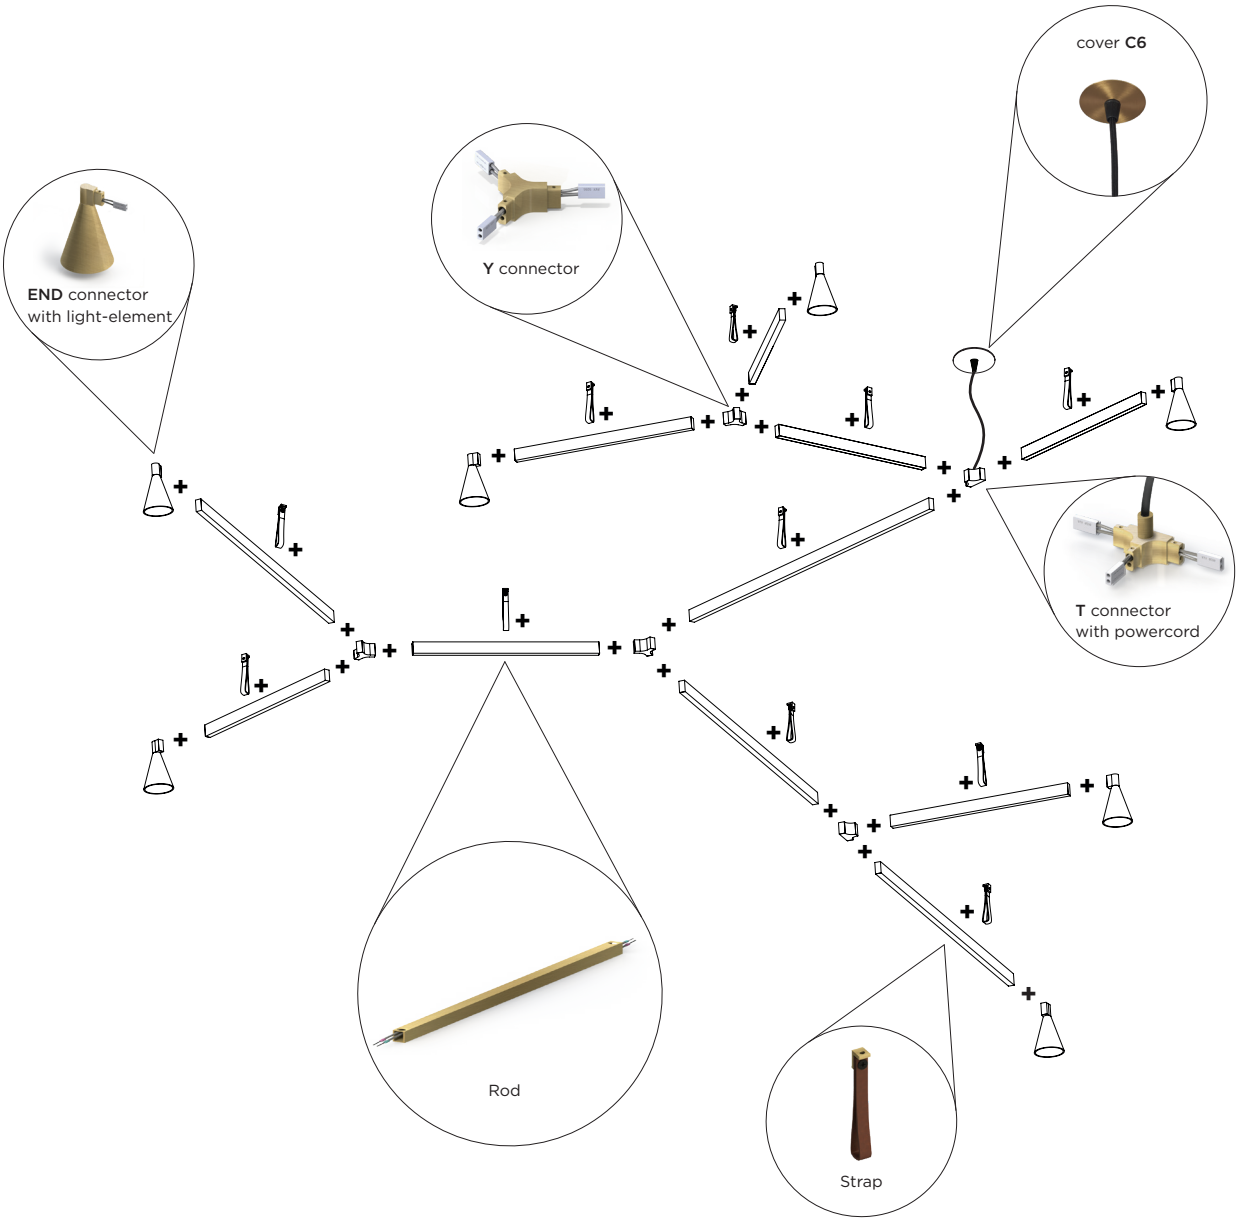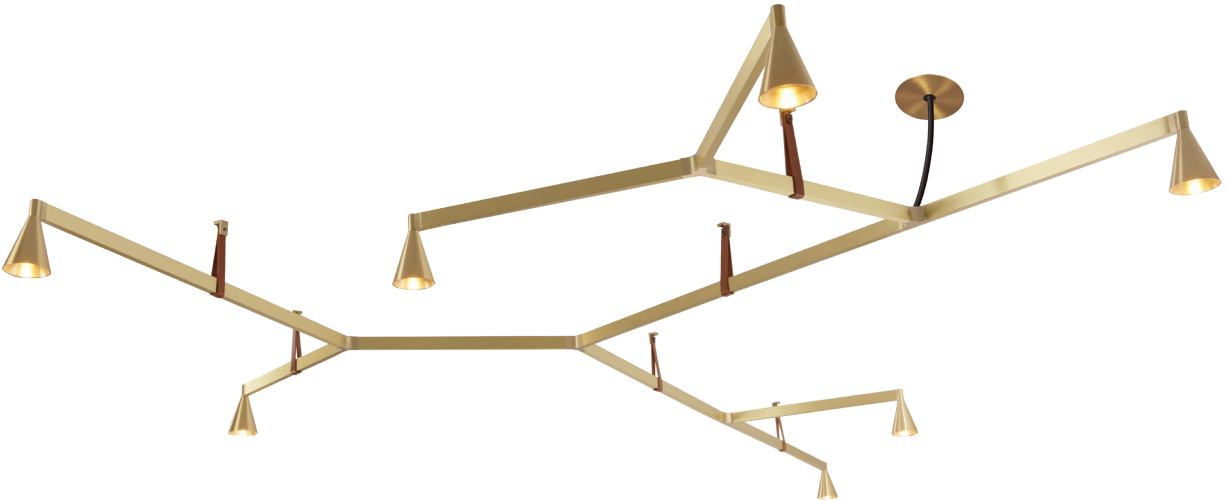

Austere-Elements Configuration °1

350mA - **driver + base/cover/canopy required** see p.47
6 x LED array 6W (LED incl.) - 350mA - 6 x 634lm - 2700K - CRI >93
CEILING -   IP50 

FRAME brass
POWERCORD black
LEATHER oak

ELEM 1323

FRAME black
POWERCORD black
LEATHER black

ELEM 1222


FRAME brass
POWERCORD white
LEATHER oak

ELEM 1313

FRAME black
POWERCORD white
LEATHER black

ELEM 1212

I

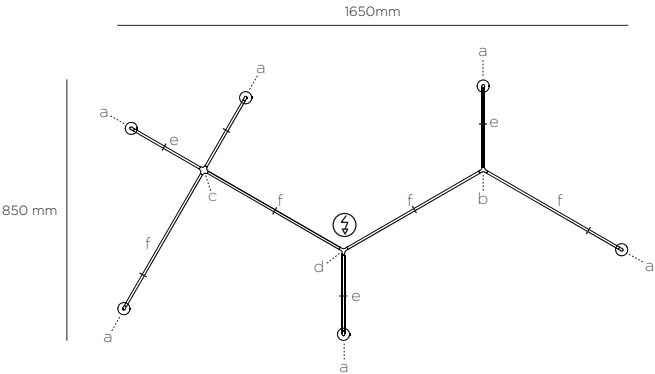

- a: 6x **END** connector with light-element
 - b: 1x **Y** connector
 - c: 1x **+** connector
 - d: 1x **Y** connector with powercord L250
 - e: 4x **Austere-Elements rods L250**
 - f: 4x **Austere-Elements rods L500**
 - 8x **Austere-Elements straps H93**
- (driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °2

350mA - **driver + base/cover/canopy required** see p.47
8 x LED array 6W (LED incl.) - 350mA - 8 x 634lm - 2700K - CRI >93
CEILING -   IP50 

FRAME brass
POWERCORD black
LEATHER oak

ELEM 2323

FRAME black
POWERCORD black
LEATHER black

ELEM 2222


FRAME brass
POWERCORD white
LEATHER oak

ELEM 2313

FRAME black
POWERCORD white
LEATHER black

ELEM 2212

I

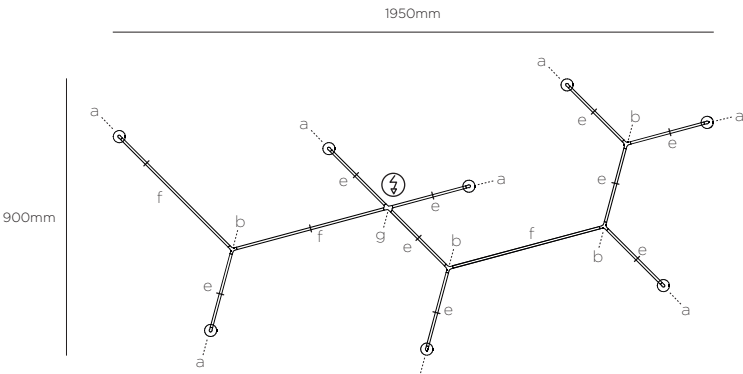

- a: 8x **END** connector with light-element
 - b: 4x **Y** connector
 - g: 1x **X** connector with powercord L250
 - e: 9x **Austere-Elements rods L250**
 - f: 3x **Austere-Elements rods L500**
 - 12x **Austere-Elements straps H93**
- (driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °3

350mA - **driver + base/cover/canopy required** see p.47

8 x LED array 6W (LED incl.) - 350mA - 8 x 634lm - 2700K - CRI >93

CEILING -   IP50 

FRAME brass
POWERCORD black
LEATHER oak



ELEM 3323

FRAME black
POWERCORD black
LEATHER black



ELEM 3222

FRAME brass
POWERCORD white
LEATHER oak




ELEM 3313

FRAME black
POWERCORD white
LEATHER black



ELEM 3212

I

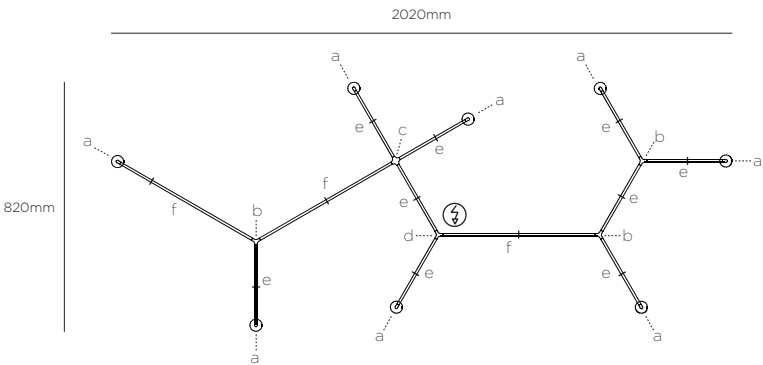

a: 8x **END** connector with light-element

b: 3x **Y** connector

c: 1x **+** connector

d: 1x **Y** connector with powercord L250

e: 9x **Austere-Elements rods L250**

f: 3x **Austere-Elements rods L500**

h: 12x **Austere-Elements straps H93**

(driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °4

350mA - **driver + base/cover/canopy required** see p.47

7 x LED array 6W (LED incl.) - 350mA - 7 x 634lm - 2700K - CRI >93

CEILING -   IP50 

FRAME brass
POWERCORD black
LEATHER oak



ELEM 4323

FRAME black
POWERCORD black
LEATHER black



ELEM 4222

FRAME brass
POWERCORD white
LEATHER oak




ELEM 4313

FRAME black
POWERCORD white
LEATHER black



ELEM 4212

I

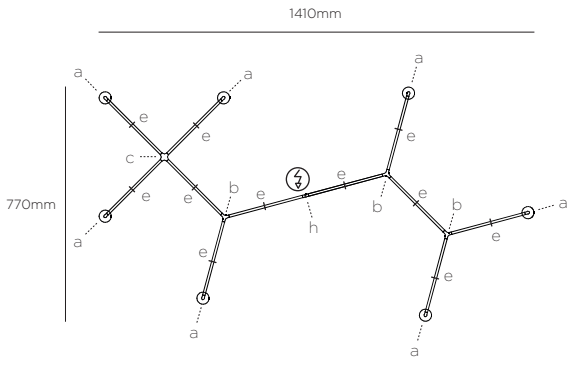

a: 7x **END** connector with light-element

b: 3x **Y** connector

c: 1x **+** connector

h: 1x **+** connector with powercord L500

e: 11x **Austere-Elements rods L250**

h: 11x **Austere-Elements straps H93**


(driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °5

350mA - **driver + base/cover/canopy required** see p.47

9 x LED array 6W **(LED incl.)** - 350mA - 9 x 634lm - 2700K - CRI >93

CEILING - IP50 eco

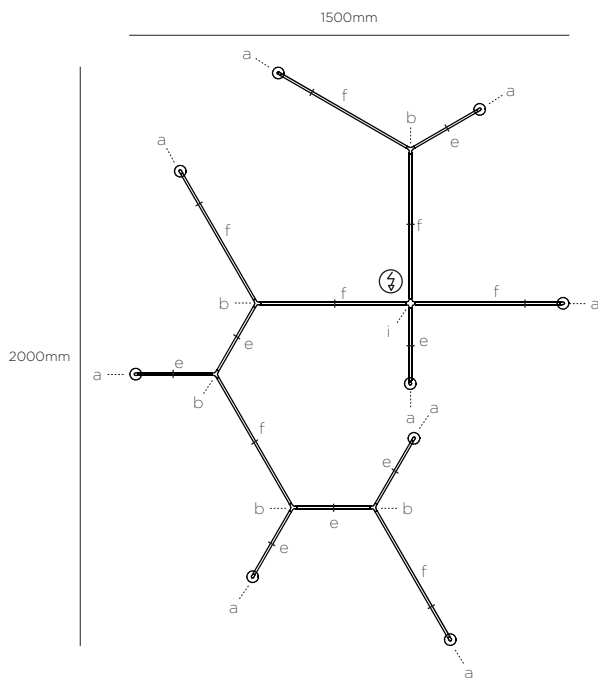

FRAME brass
POWERCORD black
LEATHER oak

ELEM 5323

- FRAME black
- POWERCORD black
- LEATHER black

ELEM 5222

 FRAME brass
 POWERCORD white
 LEATHER oak

ELEM 5313

● FRAME black
○ POWERCORD white
● LEATHER black

ELEM 5212 1

- a: 9x **END** connector with light-element
- b: 5x **Y** connector
- i: 1x **+** connector with powercord L250
- e: 7x **Austere-Elements** rods L250
- f: 7x **Austere-Elements** rods L500
- 14x **Austere-Elements** straps H93


(driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °6

350mA - **driver + base/cover/canopy required** see p.47

8 x LED array 6W (LED incl.) - 350mA - 8 x 634lm - 2700K - CRI >93

CEILING - IP50 eco

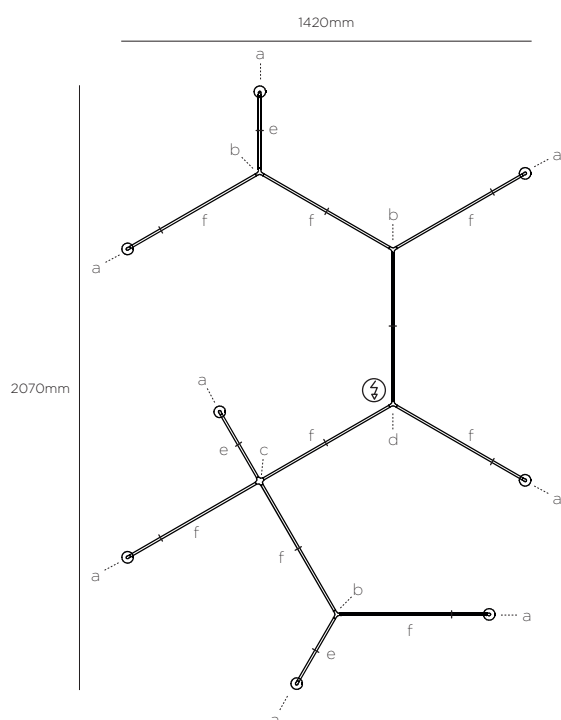

 FRAME brass
 POWERCORD black
 LEATHER oak

ELEM 6323

- FRAME black
- POWERCORD black
- LEATHER black

ELEM 6222

- FRAME brass
- POWERCORD white
- LEATHER oak

ELEM 6313

● FRAME black
○ POWERCORD white
● LEATHER black


ELEM 6212 I

- a: 8x **END** connector with light-element
- b: 3x **Y** connector
- c: 1x **+** connector
- d: 1x **Y** connector with powercord L250
- e: 3x **Austere-Elements** rods L250
- f: 9x **Austere-Elements** rods L500
- 12x **Austere-Elements** straps H93

(driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °7

350mA - **driver + base/cover/canopy required** see p.47
 7 x LED array 6W (LED incl.) - 350mA - 7 x 634lm - 2700K - CRI >93
 CEILING -   

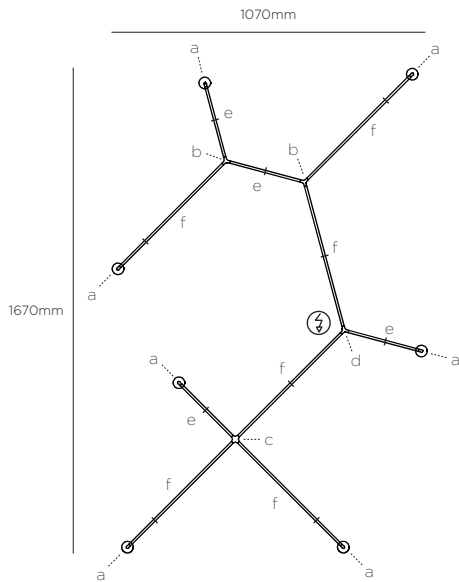

FRAME brass
 POWERCORD black
 LEATHER oak

ELEM 7323

FRAME black
 POWERCORD black
 LEATHER black

ELEM 7222

FRAME brass
 POWERCORD white
 LEATHER oak

ELEM 7313


FRAME black
 POWERCORD white
 LEATHER black

ELEM 7212

- a: 7x **END** connector with light-element
 - b: 2x **Y** connector
 - c: 1x **+** connector
 - d: 1x **Y** connector with powercord L250
 - e: 4x **Austere-Elements rods L250**
 - f: 6x **Austere-Elements rods L500**
 - 10x **Austere-Elements straps H93**
- (driver + base/cover/canopy excl. see p.47)

Austere-Elements Configuration °8

350mA - **driver + base/cover/canopy required** see p.47
 9 x LED array 6W (LED incl.) - 350mA - 9 x 634lm - 2700K - CRI >93
 CEILING -   

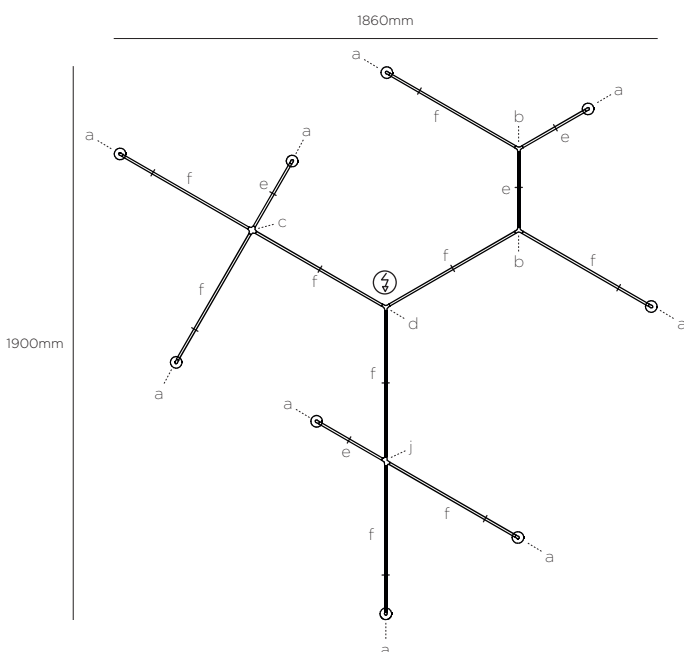

FRAME brass
 POWERCORD black
 LEATHER oak

ELEM 8323

FRAME black
 POWERCORD black
 LEATHER black

ELEM 8222


FRAME brass
 POWERCORD white
 LEATHER oak

ELEM 8313

FRAME black
 POWERCORD white
 LEATHER black

ELEM 8212

- a: 9x **END** connector with light-element
 - b: 2x **Y** connector
 - c: 1x **+** connector
 - j: 1x **X** connector
 - d: 1x **Y** connector with powercord L250
 - e: 4x **Austere-Elements rods L250**
 - f: 9x **Austere-Elements rods L500**
 - 13x **Austere-Elements straps H93**
- (driver + base/cover/canopy excl. see p.47)



Austere-Elements Rods

LENGTH	FRAME brass	FRAME black
L 250	HEL R 2003	HEL R 2002
L 500	HEL R 5003	HEL R 5002
L 750	HEL R 7003	HEL R 7002



Austere-Elements straps H93


FRAME brass LEATHER oak	FRAME black LEATHER oak	FRAME brass LEATHER black	FRAME black LEATHER black
HEL S 0933	HEL S 0923	HEL S 0932	HEL S 0922



Austere-Elements Straps Steelcable

LENGTH	FRAME brass LEATHER oak STEELCABLE silver	FRAME black LEATHER oak STEELCABLE black	FRAME brass LEATHER black STEELCABLE silver	FRAME black LEATHER black STEELCABLE black
L 250	HEL S 0033	HEL S 0023	HEL S 0032	HEL S 0022
L 500	HEL S 0533	HEL S 0523	HEL S 0532	HEL S 0522
L 1000	HEL S 1033	HEL S 1023	HEL S 1032	HEL S 1022
L 2000	HEL S 2033	HEL S 2023	HEL S 2032	HEL S 2022

Austere-Elements connectors


	FRAME brass	FRAME black		FRAME brass	FRAME black	
END connector						
16 	HELE 0003	HELE 0002	T connector			
16 	HELT 0003	HELT 0002	X connector			
16 	HELX 0003	HELX 0002	90° connector			
16 	HEL90 0003	HEL90 0002	120° connector			
16 	HELY 0003	HELY 0002	16 	HEL120 0003	HEL120 0002	

Austere-Elements connectors with light-element

350mA - **driver + base/cover/canopy required** see p.47
1 x LED array 6W (LED incl.) - 350mA - 634lm - 2700K - CRI >93
CEILING -   

	FRAME brass	FRAME black		FRAME brass	FRAME black	
END connector with light-element						
16  50 Ø 40	HELE L003	HELE L002	T connector with light-element			
16  50 Ø 40	HELT L003	HELT L002	X connector with light-element			
16  50 Ø 40	HELX L003	HELX L002	90° connector with light-element			
16  50 Ø 40	HEL90 L003	HEL90 L002	120° connector with light-element			
16  50 Ø 40	HELY L003	HELY L002	16  50 Ø 40	HEL120 L003	HEL120 L002	

Austere-Elements connectors with powercord


		POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME black POWERCORD white
END connector with powercord						
	250-2000	L 250	HECE 0023	HECE 0022	HECE 0013	HECE 0012
	16 15	L 500	HECE 0523	HECE 0522	HECE 0513	HECE 0512
		L 1000	HECE 0123	HECE 0122	HECE 0113	HECE 0112
		L 2000	HECE 0223	HECE 0222	HECE 0213	HECE 0212
- connector with powercord						
	250-2000	L 250	HEC- 0023	HEC- 0022	HEC- 0013	HEC- 0012
	16 15	L 500	HEC- 0523	HEC- 0522	HEC- 0513	HEC- 0512
		L 1000	HEC- 0123	HEC- 0122	HEC- 0113	HEC- 0112
		L 2000	HEC- 0223	HEC- 0222	HEC- 0213	HEC- 0212
+ connector with powercord						
	250-2000	L 250	HEC+ 0023	HEC+ 0022	HEC+ 0013	HEC+ 0012
	16 15	L 500	HEC+ 0523	HEC+ 0522	HEC+ 0513	HEC+ 0512
		L 1000	HEC+ 0123	HEC+ 0122	HEC+ 0113	HEC+ 0112
		L 2000	HEC+ 0223	HEC+ 0222	HEC+ 0213	HEC+ 0212
Y connector with powercord						
	250-2000	L 250	HECY 0023	HECY 0022	HECY 0013	HECY 0012
	16 15	L 500	HECY 0523	HECY 0522	HECY 0513	HECY 0512
		L 1000	HECY 0123	HECY 0122	HECY 0113	HECY 0112
		L 2000	HECY 0223	HECY 0222	HECY 0213	HECY 0212
T connector with powercord						
	250-2000	L 250	HECT 0023	HECT 0022	HECT 0013	HECT 0012
	16 15	L 500	HECT 0523	HECT 0522	HECT 0513	HECT 0512
		L 1000	HECT 0123	HECT 0122	HECT 0113	HECT 0112
		L 2000	HECT 0223	HECT 0222	HECT 0213	HECT 0212
X connector with powercord						
	250-2000	L 250	HECX 0023	HECX 0022	HECX 0013	HECX 0012
	16 15	L 500	HECX 0523	HECX 0522	HECX 0513	HECX 0512
		L 1000	HECX 0123	HECX 0122	HECX 0113	HECX 0112
		L 2000	HECX 0223	HECX 0222	HECX 0213	HECX 0212
90° connector with powercord						
	250-2000	L 250	HEC90 0023	HEC90 0022	HEC90 0013	HEC90 0012
	16 15	L 500	HEC90 0523	HEC90 0522	HEC90 0513	HEC90 0512
		L 1000	HEC90 0123	HEC90 0122	HEC90 0113	HEC90 0112
		L 2000	HEC90 0223	HEC90 0222	HEC90 0213	HEC90 0212
120° connector with powercord						
	250-2000	L 250	HEC120 0023	HEC120 0022	HEC120 0013	HEC120 0012
	16 15	L 500	HEC120 0523	HEC120 0522	HEC120 0513	HEC120 0512
		L 1000	HEC120 0123	HEC120 0122	HEC120 0113	HEC120 0112
		L 2000	HEC120 0223	HEC120 0222	HEC120 0213	HEC120 0212

Austere-Elements connectors with light-element & powercord

350mA - **driver + base/cover/canopy required** see p.47
 1 x LED array 6W (LED incl.) - 350mA - 634lm - 2700K - CRI >93
CEILING -   **IP50** 


POWERCORD LENGTH	FRAME brass POWERCORD black	FRAME black POWERCORD black	FRAME brass POWERCORD white	FRAME black POWERCORD white
	 	 	 	 

- connector with light-element & powercord




L 250	HEC- L023	HEC- L022	HEC- L013	HEC- L012
L 500	HEC- L523	HEC- L522	HEC- L513	HEC- L512
L 1000	HEC- L123	HEC- L122	HEC- L113	HEC- L112
L 2000	HEC- L223	HEC- L222	HEC- L213	HEC- L212

+ connector with light-element & powercord




L 250	HEC+ L023	HEC+ L022	HEC+ L013	HEC+ L012
L 500	HEC+ L523	HEC+ L522	HEC+ L513	HEC+ L512
L 1000	HEC+ L123	HEC+ L122	HEC+ L113	HEC+ L112
L 2000	HEC+ L223	HEC+ L222	HEC+ L213	HEC+ L212

Y connector with light-element & powercord




L 250	HECY L023	HECY L022	HECY L013	HECY L012
L 500	HECY L523	HECY L522	HECY L513	HECY L512
L 1000	HECY L123	HECY L122	HECY L113	HECY L112
L 2000	HECY L223	HECY L222	HECY L213	HECY L212

T connector with light-element & powercord




L 250	HECT L023	HECT L022	HECT L013	HECT L012
L 500	HECT L523	HECT L522	HECT L513	HECT L512
L 1000	HECT L123	HECT L122	HECT L113	HECT L112
L 2000	HECT L223	HECT L222	HECT L213	HECT L212

X connector with light-element & powercord




L 250	HECX L023	HECX L022	HECX L013	HECX L012
L 500	HECX L523	HECX L522	HECX L513	HECX L512
L 1000	HECX L123	HECX L122	HECX L113	HECX L112
L 2000	HECX L223	HECX L222	HECX L213	HECX L212

90° connector with light-element & powercord




L 250	HEC90 L023	HEC90 L022	HEC90 L013	HEC90 L012
L 500	HEC90 L523	HEC90 L522	HEC90 L513	HEC90 L512
L 1000	HEC90 L123	HEC90 L122	HEC90 L113	HEC90 L112
L 2000	HEC90 L223	HEC90 L222	HEC90 L213	HEC90 L212

120° connector with light-element & powercord




L 250	HEC120 L023	HEC120 L022	HEC120 L013	HEC120 L012
L 500	HEC120 L523	HEC120 L522	HEC120 L513	HEC120 L512
L 1000	HEC120 L123	HEC120 L122	HEC120 L113	HEC120 L112
L 2000	HEC120 L223	HEC120 L222	HEC120 L213	HEC120 L212


REQUIRED COVER/CANOPY for Austere-Elements with REMOTE MOUNTED DRIVER




brass		21CO 0003
black		21CO 0002
white		21CO 0001




brass		21CO 0013
black		21CO 0012
white		21CO 0011



black		21CO 2000
white		21CO 1000



brass		21CP 3003
black		21CP 2002
white		21CP 1001




black		21CP 5000
white		21CP 4000

REQUIRED REMOTE MOUNTED DRIVER for Austere-Elements

DEVICE	DIM.	DRIVER
2-7 x	NO (non-dimmable)	N 50W*
3-12 x	NO (non-dimmable)	N 80W*
3-12 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
3-12 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6 and C9, min. depth for driver in false ceiling: 280mm
For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers



REQUIRED BASE (DRIVER INCL.) for SURFACE MOUNTING Austere-Elements



black		1-10 PU DA	BCDP 2402
white		1-10 PU DA	BCDP 2401


optional: casambi | D CAS |

110V-230V - **driver included in base**
+ casambi possible
Min. 2 light-elements
Max. 6 light-elements



black		NO	BNDN 0822
white		NO	BNDN 0811

230V - **driver included in base**
Min. 3 light-elements
Max. 12 light-elements




black		1-10 PU	BDPU 0822
white		1-10 PU	BDPU 0811

black		DA PU	BDDA 0822
white		DA PU	BDDA 0811

optional: casambi | D CAS |

230V - **driver included in base**
+ casambi possible
Min. 3 light-elements
Max. 12 light-elements

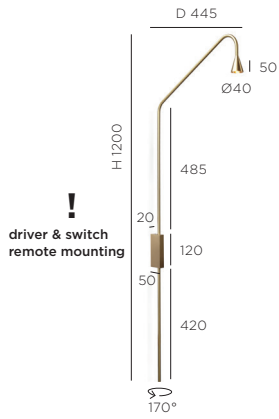

Austere-Wall built-in

350mA - **required remote mounted driver see below**
1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93
WALL -

FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
HVWB 1003	HVWB 1002	HVWB 1001	HVWB 1004	HVWB 1007	HVWB 1009

REQUIRED REMOTE MOUNTED DRIVER


DEVICE	DIM.
1 x	LC (TRIAC/IGBT)
2 x	LC (TRIAC/IGBT)
1-2 x	PU (PUSH-DIM) + 1-10 (1-10V)
1-2 x	DA (DALI)
1-2 x	DA (DALI)
2-6 x	PU (PUSH-DIM) + DA (DALI) + 1-10 (1-10V)

DRIVER

D 6WT
D 18WT
D 15WP*
D 15WDA EU
D 15WDA US*
D 40WDP*

For warranty use only Trizo21® supplied LED drivers as mentioned.
For all specs and techs about drivers, see www.trizo21.com/drivers

driver remote mounting: driver does not fit through cutout hole of fixture
***110V-230V**

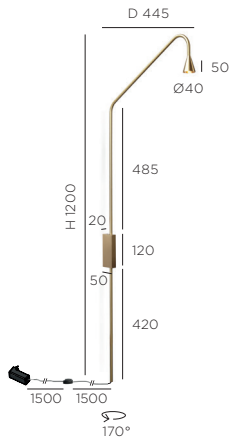


Austere-Wall plug

100V-240V - **plugdriver with PU (PUSH-DIM) button dimmer on cable**
1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93
WALL -

	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
EU plug	PU	HVWA 1003	HVWA 1002	HVWA 1001			
EU plug	PU				HVWA 1004	HVWA 1007	HVWA 1009
UK plug	PU	HVWA 1003UK	HVWA 1002UK	HVWA 1001UK			
UK plug	PU				HVWA 1004UK	HVWA 1007UK	HVWA 1009UK
US plug	PU	HVWA 1003US	HVWA 1002US	HVWA 1001US			
US plug	PU				HVWA 1004US	HVWA 1007US	HVWA 1009US
AU plug	PU	HVWA 1003AU	HVWA 1002AU	HVWA 1001AU			
AU plug	PU				HVWA 1004AU	HVWA 1007AU	HVWA 1009AU

Austere-Wall push built-in

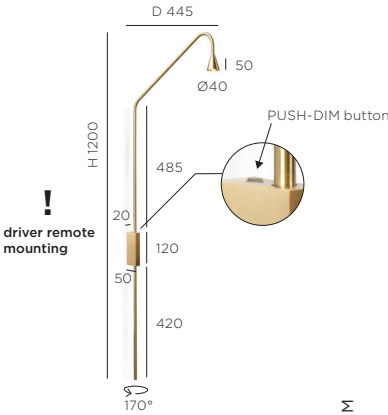

350mA - **required remote mounted driver see below** - **PU (PUSH-DIM) button on base**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
WALL -

DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
	HVWT 1003	HVWT 1002	HVWT 1001	HVWT 1004	HVWT 1007	HVWT 1009

REQUIRED REMOTE MOUNTED DRIVER


DEVICE DIM.
1 x **(PUSH-DIM)**

DRIVER

15WPLV*

For warranty use only Trizo21® supplied LED drivers as mentioned.
For all specs and techs about drivers, see www.trizo21.com/drivers

driver remote mounting: driver does not fit through cutout hole of fixture
***110V-230V**

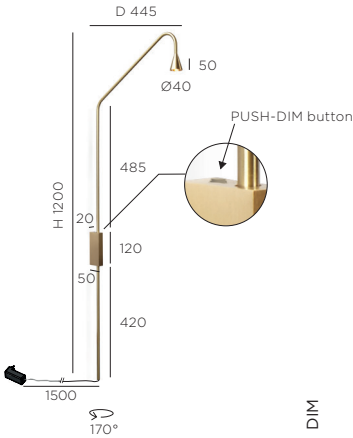



Austere-Wall push plug

100V-240V - **plugdriver** - **PU (PUSH-DIM) button on base**
1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93
WALL -


DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
	HVWT 1003EU	HVWT 1002EU	HVWT 1001EU	HVWT 1004EU	HVWT 1007EU	HVWT 1009EU
	HVWT 1003UK	HVWT 1002UK	HVWT 1001UK	HVWT 1004UK	HVWT 1007UK	HVWT 1009UK
	HVWT 1003US	HVWT 1002US	HVWT 1001US	HVWT 1004US	HVWT 1007US	HVWT 1009US
	HVWT 1003AU	HVWT 1002AU	HVWT 1001AU	HVWT 1004AU	HVWT 1007AU	HVWT 1009AU

DESIGN YOUR OWN AUSTERE-CHANDELIER - REMOTE MOUNTING

I. Choose the shape of the chandelier: **Y** or **X**

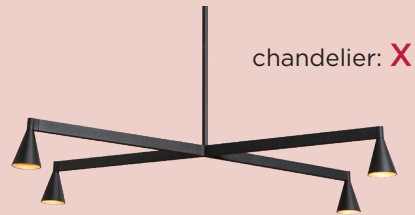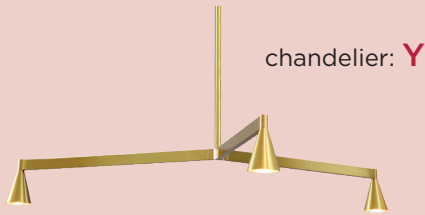

II. Choose the levels of the chandelier: 1 level, 2 levels or 3 levels

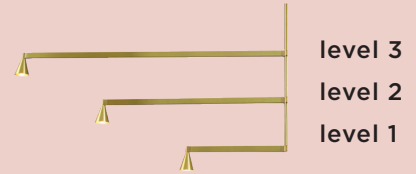

III. Choose the arm length per level: 250 mm, 500 mm or 750 mm (Each arm on the same level has the same length)

arm 250 MM



arm 500 MM



arm 750 MM



Y chandelier: 3 x 250 mm = Ø 590 mm

X chandelier: 4 x 250 mm = L: 516 mm W: 316 mm

Y chandelier: 3 x 500 mm = Ø 1090 mm


X chandelier: 4 x 500 mm = L: 949 mm W: 565 mm

Y chandelier: 3 x 750 mm = Ø 1590 mm

X chandelier: 4 x 750 mm = L: 1382 mm W: 815 mm


IV. Choose the colors and the vertical ROD: RS 16, RL 79, RF 75 or RF 100

rod short: **RS 16**



● ● FRAME
● ● POWERCORD

rod long: **RL 79**



● ● FRAME
● ● POWERCORD

rod fixed: **RF 75**



● ● FRAME

*Total height depends on the chosen mounting option, see **NOTE** on product page.

Shorter vertical rod available on demand with additional cost.

rod fixed: **RF 100**




● ● FRAME


*Total height depends on the chosen mounting option, see **NOTE** on product page.

Shorter vertical rod available on demand with additional cost.


V. Choose your cover or canopy for 'remote mounting' driver:




For false ceiling: **RS 16, RL 79, RF 75 & RF 100**
For concrete ceiling: **RS 16 & RL 79**



For **RF 75 & RF 100**



For **RS 16, RL 79, RF 75 & RF 100**



For **RS 16 & RL 79**



VI. Choose your 'remote mounting' driver:

driver: non-dimmable


driver: 1-10V dimmable
driver: PUSH-DIM dimmable
driver: DALI dimmable

DESIGN YOUR OWN AUSTERE-CHANDELIER - SURFACE MOUNTING

I. Choose the shape of the chandelier: **Y** or **X**

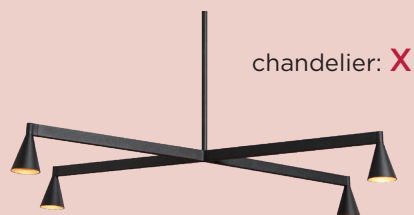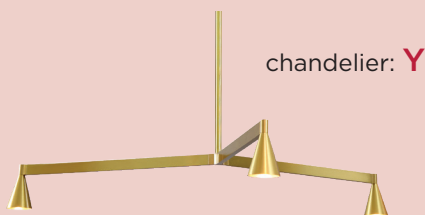

II. Choose the levels of the chandelier: 1 level, 2 levels or 3 levels

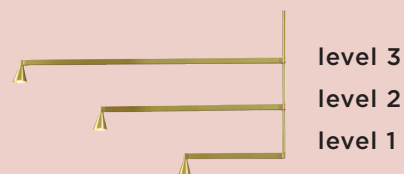

III. Choose the arm length per level: 250 mm, 500 mm or 750 mm (Each arm on the same level has the same length)

arm 250 MM



arm 500 MM



arm 750 MM



Y chandelier: 3 x 250 mm = Ø 590 mm

X chandelier: 4 x 250 mm = L: 516 mm W: 316 mm

Y chandelier: 3 x 500 mm = Ø 1090 mm

X chandelier: 4 x 500 mm = L: 949 mm W: 565 mm



Y chandelier: 3 x 750 mm = Ø 1590 mm

X chandelier: 4 x 750 mm = L: 1382 mm W: 815 mm

IV. Choose the colors and the vertical ROD: RS 16 or RL 79

rod short: **RS 16**


rod long: **RL 79**



V. Choose your base (driver incl.) for 'surface mounting':




base B20




dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible
Only for 1Y, 2Y, 1X
Max. 6 light-elements




base B21




dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible
Only for 1Y, 2Y, 1X
Max. 6 light-elements



base B32



non-dimmable driver incl. in base



base B50



dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible


Austere-Chandelier 1Y RF 75/ RF 100

Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**

3 x LED array 6W (LED incl.) - 350mA - 3 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

SUSPENSION -   IP50  Vero

1Y RF 75

LENGTH / LEVEL		FRAME brass	FRAME black	
3x 250mm		1Y RF7 2023	1Y RF7 2022	
3x 500mm		1Y RF7 5023	1Y RF7 5022	
3x 750mm		1Y RF7 7023	1Y RF7 7022	

gunmetal, bronze and nickel on demand




1Y RF 100

3x 250mm		1Y RF10 2023	1Y RF10 2022	
3x 500mm		1Y RF10 5023	1Y RF10 5022	
3x 750mm		1Y RF10 7023	1Y RF10 7022	


gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 1Y RF 75 / RF 100 with REMOTE MOUNTED DRIVER





brass		21CO 3300
black		21CO 2200
white		21CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier:
RF 75 with cover C6 will be **778mm**
RF 100 with cover C6 will be **1028mm**



brass		21CO 8003
black		21CO 8002
white		21CO 8001

NOTE: the total length of the chandelier:
RF 75 with cover C8 will be **806mm**
RF 100 with cover C8 will be **1056mm**



brass		21CP 3333
black		21CP 2222
white		21CP 1111

NOTE: the total length of the chandelier:
RF 75 with canopy B10 will be **906mm**
RF 100 with canopy B10 will be **1156mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1Y RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 50W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers

Austere-Chandelier 1Y RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

3 x LED array 6W (LED incl.) - 350mA - 3 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

SUSPENSION -   

1Y RS 16

LENGTH / LEVEL		FRAME brass			FRAME black			FRAME brass		
		POWERCORD black	STEELCABLE black		POWERCORD black	STEELCABLE black		POWERCORD white	STEELCABLE silver	
3x 250mm	I	1Y RS 2023			1Y RS 2022			1Y RS 2013		I
3x 500mm	I	1Y RS 5023			1Y RS 5022			1Y RS 5013		I
3x 750mm	I	1Y RS 7023			1Y RS 7022			1Y RS 7013		I

gunmetal, bronze and nickel on demand




1Y RL 79


3x 250mm	I	1Y RL 2023			1Y RL 2022			1Y RL 2013		I
3x 500mm	I	1Y RL 5023			1Y RL 5022			1Y RL 5013		I
3x 750mm	I	1Y RL 7023			1Y RL 7022			1Y RL 7013		I

gunmetal, bronze and nickel on demand



REQUIRED COVER/CANOPY for Austere-Chandelier 1Y RS 16 / RL 79 with REMOTE MOUNTED DRIVER




brass		21CO 0003
black		21CO 0002
white		21CO 0001



brass		21CO 0013
black		21CO 0012
white		21CO 0011



brass		21CP 3003
black		21CP 2002
white		21CP 1001



brass		21CP 3033
black		21CP 2022
white		21CP 1011

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1Y RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 50W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 1Y RS 16 / RL 79

350mA - **required base (driver incl.) see below**

3 x LED array 6W (**LED incl.**) - 350mA - 3 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.


SUSPENSION -   



1Y RS 16

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black			FRAME black POWERCORD black STEELCABLE black			FRAME brass POWERCORD white STEELCABLE silver		
									
3x 250mm	1Y RS 2023			1Y RS 2022			1Y RS 2013		
3x 500mm	1Y RS 5023			1Y RS 5022			1Y RS 5013		
3x 750mm	1Y RS 7023			1Y RS 7022			1Y RS 7013		

gunmetal, bronze and nickel on demand







1Y RL 79

3x 250mm	1Y RL 2023	1Y RL 2022	1Y RL 2013
3x 500mm	1Y RL 5023	1Y RL 5022	1Y RL 5013
3x 750mm	1Y RL 7023	1Y RL 7022	1Y RL 7013

gunmetal, bronze and nickel on demand

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 1Y RS 16 / RL 79

 base B20	 base B21	black  1-10 PU DA BCDP 2402 white  1-10 PU DA BCDP 2401	110V-230V - driver included in base + casambi possible
 base B32	 base B50	black  NO BNDN 0822 white  NO BNDN 0811	230V - driver included in base
 base B20	 base B21	black  1-10 PU BDP 0822 white  1-10 PU BDP 0811	230V - driver included in base + casambi possible
 base B32	 base B50	black  DA PU BDDA 0822 white  DA PU BDDA 0811	230V - driver included in base + casambi possible


Austere-Chandelier 2Y RF 75 / RF 100

Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**

6 x LED array 6W (LED incl.) - 350mA - 6 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

SUSPENSION -   IP50  Vero

2Y RF 75

LENGTH / LEVEL		LENGTH / LEVEL		FRAME brass	FRAME black
3x 250mm	&	3x 250mm		2Y RF7 2223	2Y RF7 2222
3x 250mm	&	3x 500mm		2Y RF7 2523	2Y RF7 2522
3x 500mm	&	3x 500mm		2Y RF7 5523	2Y RF7 5522
3x 500mm	&	3x 750mm		2Y RF7 5723	2Y RF7 5722
3x 750mm	&	3x 750mm		2Y RF7 7723	2Y RF7 7722

gunmetal, bronze and nickel on demand




2Y RF 100

3x 250mm	&	3x 250mm		2Y RF10 2223	2Y RF10 2222
3x 250mm	&	3x 500mm		2Y RF10 2523	2Y RF10 2522
3x 500mm	&	3x 500mm		2Y RF10 5523	2Y RF10 5522
3x 500mm	&	3x 750mm		2Y RF10 5723	2Y RF10 5722
3x 750mm	&	3x 750mm		2Y RF10 7723	2Y RF10 7722


gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 2Y RF 75 / RF 100 with REMOTE MOUNTED DRIVER





brass		21CO 3300
black		21CO 2200
white		21CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier:
RF 75 with cover C6 will be **914mm**
RF 100 with cover C6 will be **1164mm**



brass		21CO 8003
black		21CO 8002
white		21CO 8001

NOTE: the total length of the chandelier:
RF 75 with cover C8 will be **942mm**
RF 100 with cover C8 will be **1192mm**



brass		21CP 3333
black		21CP 2222
white		21CP 1111

NOTE: the total length of the chandelier:
RF 75 with canopy B10 will be **1042mm**
RF 100 with canopy B10 will be **1292mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2Y RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 2Y RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

6 x LED array 6W (LED incl.) - 350mA - 6 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

SUSPENSION -   



2Y RS 16

LENGTH
/ LEVEL

LENGTH
/ LEVEL


FRAME brass
POWERCORD black
STEELCABLE black

FRAME black
POWERCORD black
STEELCABLE black

FRAME brass
POWERCORD white
STEELCABLE silver

3x 250mm	&	3x 250mm	2Y RS 2223	2Y RS 2222	2Y RS 2213
3x 250mm	&	3x 500mm	2Y RS 2523	2Y RS 2522	2Y RS 2513
3x 500mm	&	3x 500mm	2Y RS 5523	2Y RS 5522	2Y RS 5513
3x 500mm	&	3x 750mm	2Y RS 5723	2Y RS 5722	2Y RS 5713
3x 750mm	&	3x 750mm	2Y RS 7723	2Y RS 7722	2Y RS 7713

gunmetal, bronze and nickel on demand




2Y RL 79


3x 250mm	&	3x 250mm	2Y RL 2223	2Y RL 2222	2Y RL 2213
3x 250mm	&	3x 500mm	2Y RL 2523	2Y RL 2522	2Y RL 2513
3x 500mm	&	3x 500mm	2Y RL 5523	2Y RL 5522	2Y RL 5513
3x 500mm	&	3x 750mm	2Y RL 5723	2Y RL 5722	2Y RL 5713
3x 750mm	&	3x 750mm	2Y RL 7723	2Y RL 7722	2Y RL 7713

gunmetal, bronze and nickel on demand



REQUIRED COVER/CANOPY for Austere-Chandelier 2Y RS 16 / RL 79 with REMOTE MOUNTED DRIVER




brass		21CO 0003
black		21CO 0002
white		21CO 0001



brass		21CO 0013
black		21CO 0012
white		21CO 0011



brass		21CP 3003
black		21CP 2002
white		21CP 1001



brass		21CP 3033
black		21CP 2022
white		21CP 1011

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2Y RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 2Y RS 16 / RL 79

350mA - **required base (driver incl.) see below**

6 x LED array 6W (**LED incl.**) - 350mA - 6 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

SUSPENSION -   IP50  eco



2Y RS 16

LENGTH
/ LEVEL

LENGTH
/ LEVEL

FRAME brass
POWERCORD black
STEELCABLE black

FRAME black
POWERCORD black
STEELCABLE black

FRAME brass
POWERCORD white
STEELCABLE silver

3x 250mm
3x 250mm

3x 500mm
3x 500mm

3x 750mm

&
&

&
&

&

3x 250mm
3x 500mm

3x 500mm
3x 750mm

3x 750mm

2Y RS 2223
2Y RS 2523

2Y RS 5523
2Y RS 5723

2Y RS 7723

2Y RS 2222
2Y RS 2522

2Y RS 5522
2Y RS 5722


2Y RS 7722

2Y RS 2213
2Y RS 2513

2Y RS 5513
2Y RS 5713

2Y RS 7713

gunmetal, bronze and nickel on demand



2Y RL 79

3x 250mm
3x 250mm

3x 500mm
3x 500mm

3x 750mm

&
&

&
&

&

3x 250mm
3x 500mm

3x 500mm
3x 750mm

3x 750mm

2Y RL 2223
2Y RL 2523

2Y RL 5523
2Y RL 5723

2Y RL 7723

2Y RL 2222
2Y RL 2522

2Y RL 5522
2Y RL 5722

2Y RL 7722

2Y RL 2213
2Y RL 2513

2Y RL 5513
2Y RL 5713


2Y RL 7713

gunmetal, bronze and nickel on demand

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 2Y RS 16 / RL 79



base B20




black  1-HO PU DA
white  1-HO PU DA

BCDP 2402
BCDP 2401


optional: **casambi**

D CAS

110V-230V - **driver included in base**
+ casambi possible



base B21




black  1-HO PU DA
white  1-HO PU DA

BCDP 2422
BCDP 2411


optional: **casambi**

D CAS

110V-230V - **driver included in base**
+ casambi possible




base B32




black  NO
white  NO

BNDN 0822
BNDN 0811

230V - **driver included in base**



base B50



black  1-HO PU
white  1-HO PU

BDPU 0822
BDPU 0811

black  DA PU
white  DA PU

BDDA 0822
BDDA 0811

optional: **casambi**

D CAS

230V - **driver included in base**
+ casambi possible


Austere-Chandelier 3Y RF 75 / RF 100

Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**

9 x LED array 6W (LED incl.) - 350mA - 9 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.

SUSPENSION -   

3Y RF 75

LENGTH / LEVEL		LENGTH / LEVEL		LENGTH / LEVEL		FRAME brass	FRAME black
3x 250mm	&	3x 250mm	&	3x 500mm			
3x 250mm	&	3x 500mm	&	3x 500mm			
3x 250mm	&	3x 500mm	&	3x 750mm			
3x 500mm	&	3x 500mm	&	3x 750mm			
3x 500mm	&	3x 750mm	&	3x 750mm			

gunmetal, bronze and nickel on demand




3Y RF 100

3x 250mm	&	3x 250mm	&	3x 500mm		3Y RF10 22523	3Y RF10 22522
3x 250mm	&	3x 500mm	&	3x 500mm		3Y RF10 25523	3Y RF10 25522
3x 250mm	&	3x 500mm	&	3x 750mm		3Y RF10 25723	3Y RF10 25722
3x 500mm	&	3x 500mm	&	3x 750mm		3Y RF10 55723	3Y RF10 55722
3x 500mm	&	3x 750mm	&	3x 750mm		3Y RF10 57723	3Y RF10 57722


gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 3Y RF 75 / RF 100 with REMOTE MOUNTED DRIVER




brass		21CO 3300
black		21CO 2200
white		21CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier:
RF 75 with cover C6 will be **1050mm**
RF 100 with cover C6 will be **1300mm**



brass		21CO 8003
black		21CO 8002
white		21CO 8001

NOTE: the total length of the chandelier:
RF 75 with cover C8 will be **1078mm**
RF 100 with cover C8 will be **1328mm**



brass		21CP 3333
black		21CP 2222
white		21CP 1111

NOTE: the total length of the chandelier:
RF 75 with canopy B10 will be **1178mm**
RF 100 with canopy B10 will be **1428mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3Y RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 3Y RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

9 x LED array 6W (LED incl.) - 350mA - 9 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 3 x 250 mm = Ø 590 mm / 3 x 500 mm = Ø 1090 mm / 3 x 750 mm = Ø 1590 mm.


SUSPENSION -   



3Y RS 16

LENGTH / LEVEL					FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver
3x 250mm	&	3x 250mm	&	3x 500mm	3Y RS 22523	3Y RS 22522	3Y RS 22513
3x 250mm	&	3x 500mm	&	3x 500mm	3Y RS 25523	3Y RS 25522	3Y RS 25513
3x 250mm	&	3x 500mm	&	3x 750mm	3Y RS 25723	3Y RS 25722	3Y RS 25713
3x 500mm	&	3x 500mm	&	3x 750mm	3Y RS 55723	3Y RS 55722	3Y RS 55713
3x 500mm	&	3x 750mm	&	3x 750mm	3Y RS 57723	3Y RS 57722	3Y RS 57713

bronze and nickel on demand



3Y RL 79


3x 250mm	&	3x 250mm	&	3x 500mm	3Y RL 22523	3Y RL 22522	3Y RL 22513
3x 250mm	&	3x 500mm	&	3x 500mm	3Y RL 25523	3Y RL 25522	3Y RL 25513
3x 250mm	&	3x 500mm	&	3x 750mm	3Y RL 25723	3Y RL 25722	3Y RL 25713
3x 500mm	&	3x 500mm	&	3x 750mm	3Y RL 55723	3Y RL 55722	3Y RL 55713
3x 500mm	&	3x 750mm	&	3x 750mm	3Y RL 57723	3Y RL 57722	3Y RL 57713

bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 3Y RS 16 / RL 79 with REMOTE MOUNTED DRIVER




cover C6




brass		21CO 0003
black		21CO 0002
white		21CO 0001




cover C6



brass		21CO 0013
black		21CO 0012
white		21CO 0011




canopy B10



brass		21CP 3003
black		21CP 2002
white		21CP 1001



canopy B11



brass		21CP 3033
black		21CP 2022
white		21CP 1011

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3Y RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 1X RF 75 / RF 100

Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**

4 x LED array 6W (LED incl.) - 350mA - 4 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   

1X RF 75

LENGTH / LEVEL	FRAME brass	FRAME black
4x 250mm	1X RF7 2023	1X RF7 2022
4x 500mm	1X RF7 5023	1X RF7 5022
4x 750mm	1X RF7 7023	1X RF7 7022

gunmetal, bronze and nickel on demand



1X RF 100


4x 250mm	1X RF10 2023	1X RF10 2022
4x 500mm	1X RF10 5023	1X RF10 5022
4x 750mm	1X RF10 7023	1X RF10 7022

gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 1X RF 75 / RF 100 with REMOTE MOUNTED DRIVER



cover C6




brass		21CO 3300
black		21CO 2200
white		21CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier:
RF 75 with cover C6 will be **778mm**
RF 100 with cover C6 will be **1028mm**




cover C8




brass		21CO 8003
black		21CO 8002
white		21CO 8001

NOTE: the total length of the chandelier:
RF 75 with cover C8 will be **806mm**
RF 100 with cover C8 will be **1056mm**



canopy B10



brass		21CP 3333
black		21CP 2222
white		21CP 1111

NOTE: the total length of the chandelier:
RF 75 with canopy B10 will be **906mm**
RF 100 with canopy B10 will be **1156mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1X RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 50W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm


For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers

Austere-Chandelier 1X RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

4 x LED array 6W (LED incl.) - 350mA - 4 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   

1X RS 16

LENGTH / LEVEL	FRAME brass			FRAME black			FRAME brass		
	POWERCORD black	STEELCABLE black		POWERCORD black	STEELCABLE black		POWERCORD white	STEELCABLE silver	
4x 250mm	1X RS 2023			1X RS 2022			1X RS 2013		
4x 500mm	1X RS 5023			1X RS 5022			1X RS 5013		
4x 750mm	1X RS 7023			1X RS 7022			1X RS 7013		

gunmetal, bronze and nickel on demand




1X RL 79


4x 250mm	1X RL 2023	1X RL 2022	1X RL 2013
4x 500mm	1X RL 5023	1X RL 5022	1X RL 5013
4x 750mm	1X RL 7023	1X RL 7022	1X RL 7013

gunmetal, bronze and nickel on demand



REQUIRED COVER/CANOPY for Austere-Chandelier 1X RS 16 / RL 79 with REMOTE MOUNTED DRIVER




brass		21CO 0003
black		21CO 0002
white		21CO 0001



brass		21CO 0013
black		21CO 0012
white		21CO 0011



brass		21CP 3003
black		21CP 2002
white		21CP 1001



brass		21CP 3033
black		21CP 2022
white		21CP 1011

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 1X RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 50W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 1X RS 16 / RL 79

350mA - **required base (driver incl.) see below**

4 x LED array 6W **(LED incl.)** - 350mA - 4 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.


SUSPENSION -   



1X RS 16

LENGTH / LEVEL	FRAME brass POWERCORD black STEELCABLE black			FRAME black POWERCORD black STEELCABLE black			FRAME brass POWERCORD white STEELCABLE silver		
									
4x 250mm	1X RS 2023			1X RS 2022			1X RS 2013		
4x 500mm	1X RS 5023			1X RS 5022			1X RS 5013		
4x 750mm	1X RS 7023			1X RS 7022			1X RS 7013		

gunmetal, bronze and nickel on demand







1X RL 79

4x 250mm	1X RL 2023	1X RL 2022	1X RL 2013
4x 500mm	1X RL 5023	1X RL 5022	1X RL 5013
4x 750mm	1X RL 7023	1X RL 7022	1X RL 7013

gunmetal, bronze and nickel on demand

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 1X RS 16 / RL 79

 base B20		black   PU DA BCDP 2402 white   PU DA BCDP 2401	110V-230V - driver included in base + casambi possible
optional: casambi D CAS			
 base B21		black   PU DA BCDP 2422 white   PU DA BCDP 2411	110V-230V - driver included in base + casambi possible
optional: casambi D CAS			
 base B32		black   BNDN 0822 white   BNDN 0811	230V - driver included in base
 base B50		black   PU BDPU 0822 white   PU BDPU 0811 black   PU BDDA 0822 white   PU BDDA 0811	230V - driver included in base + casambi possible
optional: casambi D CAS			

Austere-Chandelier 2X RF 75 / RF 100


Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**

8 x LED array 6W (LED incl.) - 350mA - 8 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.


SUSPENSION -   IP50 



2X RF 75

LENGTH / LEVEL		LENGTH / LEVEL		FRAME brass	FRAME black
4x 250mm	&	4x 500mm		2X RF7 2523	2X RF7 2522
4x 500mm	&	4x 750mm		2X RF7 5723	2X RF7 5722

gunmetal, bronze and nickel on demand




2X RF 100

4x 250mm	&	4x 500mm		2X RF10 2523	2X RF10 2522
4x 500mm	&	4x 750mm		2X RF10 5723	2X RF10 5722


gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 2X RF 75 / RF 100 with REMOTE MOUNTED DRIVER




brass		21CO 3300
black		21CO 2200
white		21CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier:
RF 75 with cover C6 will be **914mm**
RF 100 with cover C6 will be **1164mm**



brass		21CO 8003
black		21CO 8002
white		21CO 8001

NOTE: the total length of the chandelier:
RF 75 with cover C8 will be **942mm**
RF 100 with cover C8 will be **1192mm**



brass		21CP 3333
black		21CP 2222
white		21CP 1111

NOTE: the total length of the chandelier:
RF 75 with canopy B10 will be **1042mm**
RF 100 with canopy B10 will be **1292mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2X RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 2X RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

8 x LED array 6W (LED incl.) - 350mA - 8 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   IP50  eco



2X RS 16

LENGTH
/ LEVEL

LENGTH
/ LEVEL

FRAME brass
POWERCORD black
STEELCABLE black

FRAME black
POWERCORD black
STEELCABLE black

FRAME brass
POWERCORD white
STEELCABLE silver

4x 250mm

&

4x 500mm

|

2X RS 2523

2X RS 2522

2X RS 2513

|

4x 500mm

&

4x 750mm

|


2X RS 5723

2X RS 5722

2X RS 5713

|

gunmetal, bronze and nickel on demand



2X RL 79

4x 250mm

&

4x 500mm

|

2X RL 2523

2X RL 2522

2X RL 2513

|

4x 500mm

&

4x 750mm

|

2X RL 5723


2X RL 5722

2X RL 5713


|

gunmetal, bronze and nickel on demand



REQUIRED COVER/CANOPY for Austere-Chandelier 2X RS 16 / RL 79 with REMOTE MOUNTED DRIVER




brass  21CO 0003
black  21CO 0002
white  21CO 0001



brass  21CO 0013
black  21CO 0012
white  21CO 0011



brass  21CP 3003
black  21CP 2002
white  21CP 1001



brass  21CP 3033
black  21CP 2022
white  21CP 1011

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 2X RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 2X RS 16 / RL 79

350mA - **required base (driver incl.) see below**

8 x LED array 6W **(LED incl.)** - 350mA - 8 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   IP50 



2X RS 16

LENGTH
/ LEVEL

4x 250mm

&

LENGTH
/ LEVEL

4x 500mm

|

FRAME brass
POWERCORD black
STEELCABLE black

2X RS 2523


FRAME black
POWERCORD black
STEELCABLE black

2X RS 2522

FRAME brass
POWERCORD white
STEELCABLE silver

2X RS 2513

gunmetal, bronze and nickel on demand



2X RL 79

4x 250mm

&

4x 500mm

|

2X RL 2523

2X RL 2522

2X RL 2513

4x 500mm

&

4x 750mm

|


2X RL 5723

2X RL 5722


2X RL 5713

gunmetal, bronze and nickel on demand

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 2X RS 16 / RL 79



base B32




black 
white 

NO 
NO 

BNDN 0822
BNDN 0811

230V - **driver included in base**



base B50



black 
white 

HO PU 
HO PU 

BDPU 0822
BDPU 0811

230V - **driver included in base**
+ casambi possible

black 
white 

DA PU 
DA PU 

BDDA 0822
BDDA 0811

optional: **casambi**


D CAS

Austere-Chandelier 3X RF 75 / RF 100

Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**12 x LED array 6W (**LED incl.**) - 350mA - 12 x 634lm - 2700K - CRI >93


Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   

3X RF 75

LENGTH / LEVEL		LENGTH / LEVEL		LENGTH / LEVEL		FRAME brass	FRAME black
4x 250mm	&	4x 500mm	&	4x 750mm		3X RF7 25723	3X RF7 25722

gunmetal, bronze and nickel on demand



3X RF 100


LENGTH / LEVEL		LENGTH / LEVEL		LENGTH / LEVEL		3X RF10 25723	3X RF10 25722
4x 250mm	&	4x 500mm	&	4x 750mm			

gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Chandelier 3X RF 75 / RF 100 with REMOTE MOUNTED DRIVER

cover C6

Ø60
2




brass		21CO 3300
black		21CO 2200
white		21CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the chandelier:
RF 75 with cover C6 will be **1050mm**
RF 100 with cover C6 will be **1300mm**

cover C8

Ø80
5




brass		21CO 8003
black		21CO 8002
white		21CO 8001

NOTE: the total length of the chandelier:
RF 75 with cover C8 will be **1078mm**
RF 100 with cover C8 will be **1328mm**

canopy B10

Ø50
105



brass		21CP 3333
black		21CP 2222
white		21CP 1111

NOTE: the total length of the chandelier:
RF 75 with canopy B10 will be **1178mm**
RF 100 with canopy B10 will be **1428mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3X RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 3X RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

12 x LED array 6W (**LED incl.**) - 350mA - 12 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   



3X RS 16

LENGTH
/ LEVEL

4x 250mm

&

LENGTH
/ LEVEL

4x 500mm

&

LENGTH
/ LEVEL

4x 750mm

|

FRAME brass
POWERCORD black
STEELCABLE black

3X RS 25723

FRAME black
POWERCORD black
STEELCABLE black


3X RS 25722

FRAME brass
POWERCORD white
STEELCABLE silver

3X RS 25713

|

gunmetal, bronze and nickel on demand

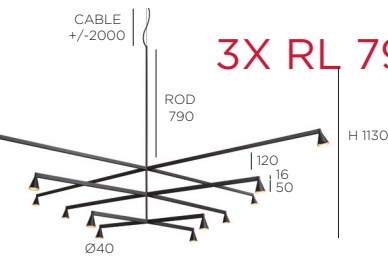

3X RL 79

4x 250mm

&

4x 500mm

&

4x 750mm

|

3X RL 25723


3X RL 25722

3X RL 25713


|

gunmetal, bronze and nickel on demand



REQUIRED COVER/CANOPY for Austere-Chandelier 3X RS 16 / RL 79 with REMOTE MOUNTED DRIVER




brass  21CO 0003
black  21CO 0002
white  21CO 0001



brass  21CO 0013
black  21CO 0012
white  21CO 0011



brass  21CP 3003
black  21CP 2002
white  21CP 1001



brass  21CP 3033
black  21CP 2022
white  21CP 1011

REQUIRED REMOTE MOUNTED DRIVER for Austere-Chandelier 3X RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 80W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Chandelier 3X RS 16 / RL 79

350mA - **required base (driver incl.) see below**

12 x LED array 6W (**LED incl.**) - 350mA - 12 x 634lm - 2700K - CRI >93

Each arm on the same level has the same length: 4 x 250 mm = L 516 mm W 316 mm / 4 x 500 mm = L 949 mm W 565 mm / 4 x 750 mm = L 1382 mm W 815 mm.

SUSPENSION -   IP50 



3X RS 16

LENGTH
/ LEVEL

4x 250mm

&

LENGTH
/ LEVEL

4x 500mm

&

LENGTH
/ LEVEL

4x 750mm

FRAME brass
POWERCORD black
STEELCABLE black

3X RS 25723


FRAME black
POWERCORD black
STEELCABLE black

3X RS 25722

FRAME brass
POWERCORD white
STEELCABLE silver

3X RS 25713

gunmetal, bronze and nickel on demand

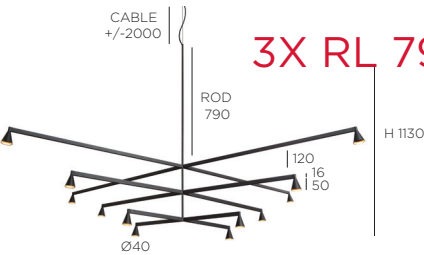

3X RL 79

4x 250mm

&

4x 500mm

&

4x 750mm



3X RL 25723

3X RL 25722

3X RL 25713

gunmetal, bronze and nickel on demand

REQUIRED BASE (DRIVER INCL.) for Austere-Chandelier 3X RS 16 / RL 79





black 
white 

NO
NO

BNDN 0822
BNDN 0811

230V - **driver included in base**



black 
white 

HO PU
HO PU

BDPU 0822
BDPU 0811


230V - **driver included in base**
+ casambi possible

black 
white 

DA PU
DA PU

BDDA 0822
BDDA 0811

optional: **casambi** | D CAS |




Position of the light fixture
in the base can be adjusted

Austere-D1 3 RF 75

230V - driver included in base - **LC** (TRIAC/IGBT) or **I10** (1-10V) or **PU** (PUSH-DIM) or **DA** (DALI) dimmable
3 x LED array 6W (**LED incl.**) - 350mA - 3 x 634lm - 2700K - CRI >93
Shorter RF ROD available on demand. - **SUSPENSION** -   

			DIM						
			FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel	
black BASE			AFLC 31273	AFLC 31272	AFLC 31271				
white BASE			AFLC 31173	AFLC 31172	AFLC 31171				
black BASE						AFLC 31274	AFLC 31277	AFLC 31279	
white BASE						AFLC 31174	AFLC 31177	AFLC 31179	
black BASE			AFPU 31273	AFPU 31272	AFPU 31271				
white BASE			AFPU 31173	AFPU 31172	AFPU 31171				
black BASE						AFPU 31274	AFPU 31277	AFPU 31279	
white BASE						AFPU 31174	AFPU 31177	AFPU 31179	
black BASE			AFDA 31273	AFDA 31272	AFDA 31271				
white BASE			AFDA 31173	AFDA 31172	AFDA 31171				
black BASE						AFDA 31274	AFDA 31277	AFDA 31279	
white BASE						AFDA 31174	AFDA 31177	AFDA 31179	




Position of the light fixture
in the base can be adjusted

Austere-D1 3 RF 100

230V - driver included in base - **LC** (TRIAC/IGBT) or **I10** (1-10V) or **PU** (PUSH-DIM) or **DA** (DALI) dimmable
3 x LED array 6W (**LED incl.**) - 350mA - 3 x 634lm - 2700K - CRI >93
Shorter RF ROD available on demand. - **SUSPENSION** -   

		DIM			FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE			LC		AFLC 31293	AFLC 31292	AFLC 31291			
white BASE			LC		AFLC 31193	AFLC 31192	AFLC 31191			
black BASE			LC					AFLC 31294	AFLC 31297	AFLC 31299
white BASE			LC					AFLC 31194	AFLC 31197	AFLC 31199
black BASE			1-10 PU		AFPU 31293	AFPU 31292	AFPU 31291			
white BASE			1-10 PU		AFPU 31193	AFPU 31192	AFPU 31191			
black BASE			1-10 PU					AFPU 31294	AFPU 31297	AFPU 31299
white BASE			1-10 PU					AFPU 31194	AFPU 31197	AFPU 31199
black BASE			PU DA		AFDA 31293	AFDA 31292	AFDA 31291			
white BASE			PU DA		AFDA 31193	AFDA 31192	AFDA 31191			
black BASE			PU DA					AFDA 31294	AFDA 31297	AFDA 31299
white BASE			PU DA					AFDA 31194	AFDA 31197	AFDA 31199




Position of the light fixture
in the base can be adjusted

Austere-D2 5 RF 75

230V - driver included in base - **LC** (TRIAC/IGBT) or **10** (1-10V) or **PU** (PUSH-DIM) or **DA** (DALI) dimmable
5 x LED array 6W (**LED incl.**) - 350mA - 5 x 634lm - 2700K - CRI >93
Shorter RF ROD available on demand. - **SUSPENSION** -   

			DIM					
			FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE			AFLC 52273	AFLC 52272	AFLC 52271			
white BASE			AFLC 52173	AFLC 52172	AFLC 52171			
black BASE						AFLC 52274	AFLC 52277	AFLC 52279
white BASE						AFLC 52174	AFLC 52177	AFLC 52179
black BASE			AFPU 52273	AFPU 52272	AFPU 52271			
white BASE			AFPU 52173	AFPU 52172	AFPU 52171			
black BASE						AFPU 52274	AFPU 52277	AFPU 52279
white BASE						AFPU 52174	AFPU 52177	AFPU 52179
black BASE			AFDA 52273	AFDA 52272	AFDA 52271			
white BASE			AFDA 52173	AFDA 52172	AFDA 52171			
black BASE						AFDA 52274	AFDA 52277	AFDA 52279
white BASE						AFDA 52174	AFDA 52177	AFDA 52179




Position of the light fixture
in the base can be adjusted

Austere-D2 5 RF 100

230V - driver included in base - **LC** (TRIAC/IGBT) or **I10** (1-10V) or **PU** (PUSH-DIM) or **DA** (DALI) dimmable
5 x LED array 6W (LED incl.) - 350mA - 5 x 634lm - 2700K - CRI >93
Shorter RF ROD available on demand. - **SUSPENSION** -   


	DIM	FRAME brass	FRAME black	FRAME white	FRAME gunmetal	FRAME bronze	FRAME nickel
black BASE		AFLC 52293	AFLC 52292	AFLC 52291			
white BASE		AFLC 52193	AFLC 52192	AFLC 52191			
black BASE					AFLC 52294	AFLC 52297	AFLC 52299
white BASE					AFLC 52194	AFLC 52197	AFLC 52199
black BASE		AFPU 52293	AFPU 52292	AFPU 52291			
white BASE		AFPU 52193	AFPU 52192	AFPU 52191			
black BASE					AFPU 52294	AFPU 52297	AFPU 52299
white BASE					AFPU 52194	AFPU 52197	AFPU 52199
black BASE		AFDA 52293	AFDA 52292	AFDA 52291			
white BASE		AFDA 52193	AFDA 52192	AFDA 52191			
black BASE					AFDA 52294	AFDA 52297	AFDA 52299
white BASE					AFDA 52194	AFDA 52197	AFDA 52199

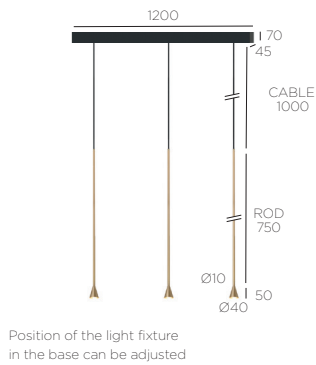

Austere-D1 3 RL 79

230V - driver included in base - (TRIAC/IGBT) or (1-10V) or (PUSH-DIM) or (DALI) dimmable
3 x LED array 6W (LED incl.) - 350mA - 3 x 634lm - 2700K - CRI >93
Longer cable lengths available on demand. - **SUSPENSION** -


	DIM	CABLE LENGTH	FRAME brass CABLE black	FRAME black CABLE black	FRAME white CABLE white	FRAME gunmetal CABLE black	FRAME bronze CABLE black	FRAME nickel CABLE black
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						

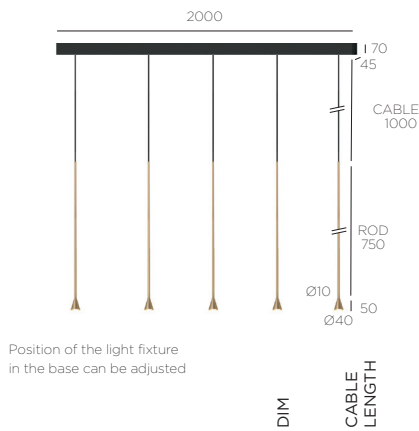

Austere-D2 5 RL 79

230V - driver included in base - (TRIAC/IGBT) or (1-10V) or (PUSH-DIM) or (DALI) dimmable
5 x LED array 6W (LED incl.) - 350mA - 5 x 634lm - 2700K - CRI >93
Longer cable lengths available on demand. - **SUSPENSION** -

	DIM	CABLE LENGTH	FRAME brass CABLE black	FRAME black CABLE black	FRAME white CABLE white	FRAME gunmetal CABLE black	FRAME bronze CABLE black	FRAME nickel CABLE black
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						
black BASE		L 1000						
white BASE		L 1000						



Austere-Solitaire RF

RF = fixed vertical rod of max. 988mm (possibility to shorten with tube cutter)

350mA - **required remote mounted driver see below**

1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93

FALSE ceiling = aperture : Ø 45 - depth : min. 50 mm - depth for driver in ceiling : min. 70 mm

CONCRETE ceiling = aperture : Ø 45 - depth : min. 40 mm - depth for driver in ceiling : min. 110 mm

SUSPENSION -

	COVER brass FRAME brass	COVER black FRAME black	COVER white FRAME white	COVER gunmetal FRAME gunmetal	COVER bronze FRAME bronze	COVER nickel FRAME nickel
FALSE ceiling						
FALSE ceiling	HVSU 1003	HVSU 1002	HVSU 1001	HVSU 1004	HVSU 1007	HVSU 1009
CONCRETE ceiling						
CONCRETE ceiling	HVSC 1003	HVSC 1002	HVSC 1001	HVSC 1004	HVSC 1007	HVSC 1009

REQUIRED REMOTE MOUNTED DRIVER


DEVICE	DIM.
1 x	LC (TRIAC/IGBT)
2 x	LC (TRIAC/IGBT)
1-2 x	PU (PUSH-DIM) + 1-10 (1-10V)
1-2 x	DA (DALI)
1-2 x	DA (DALI)
2-6 x	PU (PUSH-DIM) + DA (DALI) + 1-10 (1-10V)

DRIVER

D 6WT
D 18WT
D 15WP*
D 15WDA EU
D 15WDA US*
D 40WDP*

For warranty use only Trizo21® supplied LED drivers as mentioned.
For all specs and techs about drivers, see www.trizo21.com/drivers

driver remote mounting: driver does not fit through cutout hole of fixture
*110V-230V



Austere-Solitaire RF D+B


RF = fixed vertical rod of max. 988mm (possibility to shorten with tube cutter)

230V - **driver included in base** - LC (TRIAC/IGBT) dimmable

1 x LED array 6W (**LED incl.**) - 350mA - 634lm - 2700K - CRI >93

SUSPENSION -

	CANOPY brass FRAME brass	CANOPY black FRAME black	CANOPY white FRAME white	CANOPY gunmetal FRAME gunmetal	CANOPY bronze FRAME bronze	CANOPY nickel FRAME nickel
DIM						
LC	HVSBD 1113	HVSBD 1112	HVSBD 1111	HVSBD 1114	HVSBD 1117	HVSBD 1119

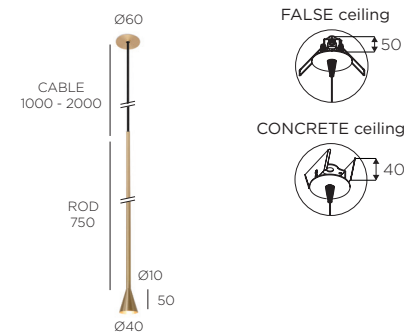

Austere-Solitaire RL

RL = long vertical rod of 750 mm + powercord - Longer cable lengths available on demand.

350mA - **required remote mounted driver see below**

1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93

FALSE ceiling = aperture : Ø 45 - depth : min. 50 mm - depth for driver in ceiling : min. 70 mm

CONCRETE ceiling = aperture : Ø 45 - depth : min. 40 mm - depth for driver in ceiling : min. 110 mm

SUSPENSION -

	CABLE LENGTH	COVER brass CABLE black FRAME brass	COVER black CABLE black FRAME black	COVER white CABLE white FRAME white	COVER gunmetal CABLE black FRAME gunmetal	COVER bronze CABLE black FRAME bronze	COVER nickel CABLE black FRAME nickel
FALSE ceiling	L 1000						
FALSE ceiling	L 2000						
FALSE ceiling	L 1000						
FALSE ceiling	L 2000						
CONCRETE ceiling	L 1000						
CONCRETE ceiling	L 2000						
CONCRETE ceiling	L 1000						
CONCRETE ceiling	L 2000						

REQUIRED REMOTE MOUNTED DRIVER


DEVICE	DIM.
1 x	LC (TRIAC/IGBT)
2 x	LC (TRIAC/IGBT)
1-2 x	PU (PUSH-DIM) + 1-10 (1-10V)
1-2 x	DA (DALI)
1-2 x	DA (DALI)
2-6 x	PU (PUSH-DIM) + DA (DALI) + 1-10 (1-10V)

DRIVER

D 6WT
D 18WT
D 15WP*
D 15WDA EU
D 15WDA US*
D 40WDP*

For warranty use only Trizo21® supplied LED drivers as mentioned.
For all specs and techs about drivers, see www.trizo21.com/drivers

driver remote mounting: driver does not fit through cutout hole of fixture
*110V-230V



Austere-Solitaire RL D+B

RL = long vertical rod of 750mm + powercord - Longer cable lengths available on demand.

230V - **driver included in base** - LC (TRIAC/IGBT) **dimnable**


1 x LED array 6W **(LED incl.)** - 350mA - 634lm - 2700K - CRI >93

SUSPENSION -

	CABLE LENGTH	CANOPY brass CABLE black FRAME brass	CANOPY black CABLE black FRAME black	CANOPY white CABLE white FRAME white	CANOPY gunmetal CABLE black FRAME gunmetal	CANOPY bronze CABLE black FRAME bronze	CANOPY nickel CABLE black FRAME nickel
LC	L 1000						
LC	L 2000						
LC	L 1000						
LC	L 2000						

DESIGN YOUR OWN AUSTERE-SUSPENSION - REMOTE MOUNTING

- I. Choose 1 x the **CENTER** length: 500 mm or 750 mm
- II. Choose 2 x the same **END** lengths: 250 mm or 500 mm
- III. Choose 4 x the same **SIDE** lengths: 250 mm or 500 mm

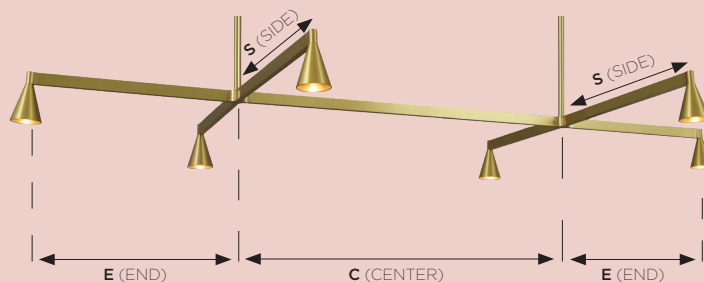

DIMENSIONS:	C 500 mm + 2 x E 250 mm + 4 x S 250 mm	Total size L: 1120 mm W: 590 mm
	C 500 mm + 2 x E 250 mm + 4 x S 500 mm	Total size L: 1120 mm W: 1090 mm
	C 500 mm + 2 x E 500 mm + 4 x S 250 mm	Total size L: 1620 mm W: 590 mm
	C 500 mm + 2 x E 500 mm + 4 x S 500 mm	Total size L: 1620 mm W: 1090 mm
	C 750 mm + 2 x E 250 mm + 4 x S 250 mm	Total size L: 1370 mm W: 590 mm
	C 750 mm + 2 x E 250 mm + 4 x S 500 mm	Total size L: 1370 mm W: 1090 mm
	C 750 mm + 2 x E 500 mm + 4 x S 250 mm	Total size L: 1870 mm W: 590 mm
	C 750 mm + 2 x E 500 mm + 4 x S 500 mm	Total size L: 1870 mm W: 1090 mm

- IV. Choose the colors and the vertical ROD: RS 16, RL 79, RF 75 or RF 100

rod short: RS 16	rod long: RL 79	rod fixed: RF 75	rod fixed: RF 100
CABLE +/-2000 RS 16 ROD 160	CABLE +/-2000 RL 79 ROD 790	RF 75 *ROD 750	RF 100 *ROD 1000
FRAME POWERCORD	FRAME POWERCORD	FRAME	FRAME
*Total height depends on the chosen mounting option, see NOTE on product page. Shorter vertical rod available on demand with additional cost.		*Total height depends on the chosen mounting option, see NOTE on product page. Shorter vertical rod available on demand with additional cost.	

- V. Choose your cover or canopy for 'remote mounting' driver:

cover C6	cover C8	canopy B10	canopy B11
aperture: Ø45 DRIVER false/concrete ceiling	aperture: Ø30 D50 remote driver concrete ceiling	aperture: Ø50 remote driver false/concrete ceiling	aperture: Ø50 remote driver false/concrete ceiling
For false ceiling: RS 16, RL 79, RF 75 & RF 100 For concrete ceiling: RS 16 & RL 79	For RF 75 & RF 100	For RS 16, RL 79, RF 75 & RF 100	For RS 16 & RL 79


- VI. Choose your 'remote mounting' driver:

driver: non-dimmable

driver: 1-10V dimmable
driver: PUSH-DIM dimmable
driver: DALI dimmable


DESIGN YOUR OWN AUSTERE-SUSPENSION - SURFACE MOUNTING

- I. Choose 1 x the **CENTER** length: 500 mm or 750 mm
- II. Choose 2 x the same **END** lengths: 250 mm or 500 mm
- III. Choose 4 x the same **SIDE** lengths: 250 mm or 500 mm

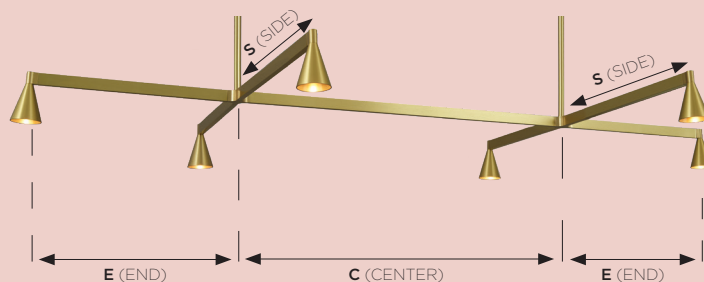

DIMENSIONS:	C 500 mm + 2 x E 250 mm + 4 x S 250 mm	Total size L: 1120 mm W: 590 mm
	C 500 mm + 2 x E 250 mm + 4 x S 500 mm	Total size L: 1120 mm W: 1090 mm
	C 500 mm + 2 x E 500 mm + 4 x S 250 mm	Total size L: 1620 mm W: 590 mm
	C 500 mm + 2 x E 500 mm + 4 x S 500 mm	Total size L: 1620 mm W: 1090 mm
	C 750 mm + 2 x E 250 mm + 4 x S 250 mm	Total size L: 1370 mm W: 590 mm
	C 750 mm + 2 x E 250 mm + 4 x S 500 mm	Total size L: 1370 mm W: 1090 mm
	C 750 mm + 2 x E 500 mm + 4 x S 250 mm	Total size L: 1870 mm W: 590 mm
	C 750 mm + 2 x E 500 mm + 4 x S 500 mm	Total size L: 1870 mm W: 1090 mm


- IV. Choose the colors and the vertical ROD: RS 16 or RL 79

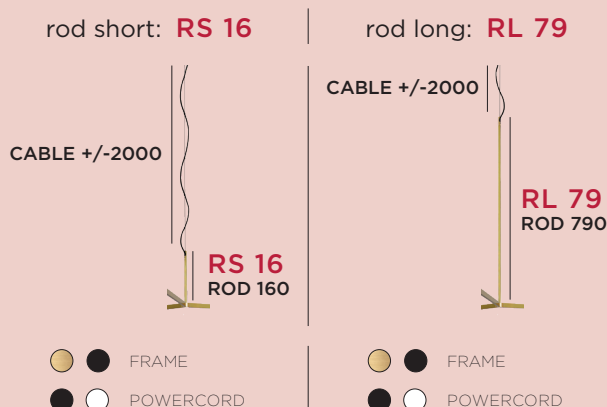


- V. Choose your base (driver incl.) for 'surface mounting':




base B20




dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible



base B32



non-dimnable driver incl. in base



base B50



dimnable driver incl. in base
(1-10V / PUSH-DIM / DALI)
+ casambi possible

Austere-Suspension 1+ RF 75 / RF 100


Shorter RF ROD available on demand.

350mA - **required remote mounted driver + required cover/canopy see below**

6 x LED array 6W (LED incl.) - 350mA - 6 x 634lm - 2700K - CRI >93

C (CENTER LENGTH), E (END LENGTH), S (SIDE LENGTH), **total dimensions see p. 101**


SUSPENSION -   



1+ RF 75

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass	FRAME black
1x 500mm	2x 250mm	4x 250mm	1+ SU RF7 52223	1+ SU RF7 52222
1x 500mm	2x 500mm	4x 250mm	1+ SU RF7 55223	1+ SU RF7 55222
1x 750mm	2x 250mm	4x 250mm	1+ SU RF7 72223	1+ SU RF7 72222
1x 750mm	2x 500mm	4x 250mm	1+ SU RF7 75223	1+ SU RF7 75222

SIDE LENGTH 4x 500mm on demand
gunmetal, bronze and nickel on demand



1+ RF 100


1x 500mm	2x 250mm	4x 250mm	1+ SU RF10 52223	1+ SU RF10 52222
1x 500mm	2x 500mm	4x 250mm	1+ SU RF10 55223	1+ SU RF10 55222
1x 750mm	2x 250mm	4x 250mm	1+ SU RF10 72223	1+ SU RF10 72222
1x 750mm	2x 500mm	4x 250mm	1+ SU RF10 75223	1+ SU RF10 75222

SIDE LENGTH 4x 500mm on demand
gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Suspension 1+ RF 75 / RF 100 with REMOTE MOUNTED DRIVER



cover C6




brass		22CO 3300
black		22CO 2200
white		22CO 1100

NOTE: If the thickness of the false ceiling is 15mm, the total length of the suspension:
RF 75 with cover C6 will be **778mm**
RF 100 with cover C6 will be **1028mm**




cover C8




brass		22CO 8003
black		22CO 8002
white		22CO 8001

NOTE: the total length of the suspension:
RF 75 with cover C8 will be **806mm**
RF 100 with cover C8 will be **1056mm**



canopy B10



brass		22CP 3333
black		22CP 2222
white		22CP 1111

NOTE: the total length of the suspension:
RF 75 with canopy B10 will be **906mm**
RF 100 with canopy B10 will be **1156mm**

REQUIRED REMOTE MOUNTED DRIVER for Austere-Suspension 1+ RF 75 / RF 100

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 50W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm
For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Suspension 1+ RS 16 / RL 79

350mA - **required remote mounted driver + required cover/canopy see below**

6 x LED array 6W (LED incl.) - 350mA - 6 x 634lm - 2700K - CRI >93

C (CENTER LENGTH), E (END LENGTH), S (SIDE LENGTH), **total dimensions see p. 101**


SUSPENSION -   



1+ RS 16

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver
1x 500mm 1x 500mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RS 52223 1+ SU RS 55223	1+ SU RS 52222 1+ SU RS 55222	1+ SU RS 52213 1+ SU RS 55213
1x 750mm 1x 750mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RS 72223 1+ SU RS 75223	1+ SU RS 72222 1+ SU RS 75222	1+ SU RS 72213 1+ SU RS 75213

SIDE LENGTH 4x 500mm on demand
gunmetal, bronze and nickel on demand



1+ RL 79


1x 500mm 1x 500mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RL 52223 1+ SU RL 55223	1+ SU RL 52222 1+ SU RL 55222	1+ SU RL 52213 1+ SU RL 55213
1x 750mm 1x 750mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RL 72223 1+ SU RL 75223	1+ SU RL 72222 1+ SU RL 75222	1+ SU RL 72213 1+ SU RL 75213

SIDE LENGTH 4x 500mm on demand
gunmetal, bronze and nickel on demand

REQUIRED COVER/CANOPY for Austere-Suspension 1+ RS 16 / RL 79 with REMOTE MOUNTED DRIVER



cover C6




brass		21CO 0003
black		21CO 0002
white		21CO 0001




cover C6



brass		21CO 0013
black		21CO 0012
white		21CO 0011



canopy B10



brass		21CP 3003
black		21CP 2002
white		21CP 1001

REQUIRED REMOTE MOUNTED DRIVER for Austere-Suspension 1+ RS 16 / RL 79

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 50W*
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 80WP*
1 x	PU (PUSH-DIM) + DA (DALI)	D 80WD*

*driver only fits through cutout hole of fixture with C6, min. depth for driver in false ceiling: 280mm

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers


Austere-Suspension 1+ RS 16 / RL 79

350mA - **required base (driver incl.) see below**

6 x LED array 6W **(LED incl.)** - 350mA - 6 x 634lm - 2700K - CRI >93

C (CENTER LENGTH), **E** (END LENGTH), **S** (SIDE LENGTH), **total dimensions see p. 102**


SUSPENSION -   



1+ RS 16

CENTER LENGTH	END LENGTH	SIDE LENGTH	FRAME brass POWERCORD black STEELCABLE black	FRAME black POWERCORD black STEELCABLE black	FRAME brass POWERCORD white STEELCABLE silver
1x 500mm 1x 500mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RS 52223 1+ SU RS 55223	1+ SU RS 52222 1+ SU RS 55222	1+ SU RS 52213 1+ SU RS 55213
1x 750mm 1x 750mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RS 72223 1+ SU RS 75223	1+ SU RS 72222 1+ SU RS 75222	1+ SU RS 72213 1+ SU RS 75213

SIDE LENGTH 4x 500mm on demand
gunmetal, bronze and nickel on demand








1+ RL 79

1x 500mm 1x 500mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RL 52223 1+ SU RL 55223	1+ SU RL 52222 1+ SU RL 55222	1+ SU RL 52213 1+ SU RL 55213
1x 750mm 1x 750mm	2x 250mm 2x 500mm	4x 250mm 4x 250mm	1+ SU RL 72223 1+ SU RL 75223	1+ SU RL 72222 1+ SU RL 75222	1+ SU RL 72213 1+ SU RL 75213

SIDE LENGTH 4x 500mm on demand
gunmetal, bronze and nickel on demand

REQUIRED BASE (DRIVER INCL.) for Austere-Suspension 1+ RS 16 / RL 79

 base B20	 base B32	 base B50	 DRIVER	 DRIVER	 DRIVER	black  1-10 PU DA BCDP 2402 white  1-10 PU DA BCDP 2401 optional: casambi D CAS	110V-230V - driver included in base + casambi possible
						black  NO BNDN 0822 white  NO BNDN 0811	230V - driver included in base
						black  1-10 PU BDPU 0822 white  1-10 PU BDPU 0811 black  DA PU BDPA 0822 white  DA PU BDPA 0811 optional: casambi D CAS	230V - driver included in base + casambi possible



Austere-Solitaire RF 100 Track 48V

48V - adapter included - **driver required for adapter 48V see below**
1 x LED array 6W (LED incl.) - 350mA - 634lm - 2700K - CRI >93
TRACK 48V -

ADAPTER black
FRAME brass

HVSU 4793

ADAPTER white
FRAME brass

HVSW 4793

ADAPTER black
FRAME black

HVSU 4792

ADAPTER white
FRAME black

HVSW 4792

ADAPTER white
FRAME white

HVSW 4791

ADAPTER black
FRAME gunmetal

HVSU 4794

ADAPTER black
FRAME bronze

HVSU 4797


ADAPTER black
FRAME nickel

HVSU 4799

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 14W
1 x	I-10 (1-10V)	D 13WP
1 x	DA (DALI)	D 13WD

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers



- ◆ Choose beam:
- N=narrow 10° or
 - M=medium 25° or
 - W=wide 40°

Mini-Pi 1 Track 48V

48V - adapter included - **driver required for adapter 48V see below**
1 x 4 LED 0,96W (LED incl.) - 350mA - 456lm - 2700K - CRI >93
TRACK 48V -

ADAPTER black
FRAME black

MIPI 4712◆

ADAPTER black
FRAME white

MIPI 4711◆

ADAPTER white
FRAME white

MIPW 4711◆

REQUIRED DRIVER FOR ADAPTER 48V (ASSEMBLED IN ADAPTER)

DEVICE	DIM.	DRIVER
1 x	NO (non-dimmable)	N 14W
1 x	I-10 (1-10V)	D 13WP
1 x	DA (DALI)	D 13WD

For warranty use only Trizo21® supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers

