

Dama, Knit, Spa,  
Africa, Mayfair Mini,  
Out, Break Plus,  
Dots Outdoor, Class,  
Composing Pendants

VIBIA

# Spa

Design by Ramos & Bassols.

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for linear lighting and seamless integration within the surrounding architecture of a variety of humid interiors.





Each luminaire is separated from the wall by a single aluminium support and connects to a simple terminal, invisible from the front, which lends a sense of weightlessness and essentiality to the design.





The diffuser provides a glare-free, front diffuse light, ideal for creating an intimate atmosphere.






## Vanity light

Ideal as a bathroom mirror light fixture, Spa can be positioned at an angle to send diffuse, ambience lighting in the desired direction.

SLANTED DIFFUSOR



IP44. Spa can be wiped down with a wet cloth for easy maintenance









The versatility of its system allows the luminaires to be positioned in a row to illuminate up to six metres of wall or ceiling space.





Minimalist and refined in form, Spa is an adaptable system of linear LEDs that allows for limitless compositional freedom to create a broad range of atmospheres, from intimate corners for personal wellbeing to functional spaces designed for general wellness.

Particularly apt as a vanity light, it can be positioned at an angle to send diffused light in the desired direction.

Due to the subtle fluting effect of the polycarbonate, dense light tapers out from the centre towards the edges of the strip, casting an intense light without glare. The smoothness of its materiality along with the linearity of its grooves contrasts with the matte texture of the aluminium casing, offered in a range of finishings to suit diverse interior aesthetics.

- 11 Black (NCS S 8500-N)
- 23 Warm White (NCS S 0502-Y50R)
- 25 Beige D1 (NCS S 4005-Y50R)

Profile and canopy: Aluminum  
Diffuser: PMMA & Silicone

LED 2700 K. CRI >90.

LED 3500 K. CRI >90.

Control:


1-10V,

DALI,


Casambi (Remote).

IP44


VANITY LIGHT (slanted diffuser)




5987



5989



5991




IP44, suitable for wet locations



WALL & CEILING



5975



5977



5979




5981





5983



5985



VERTICAL WALL



5993



5995

Detailed product information

# Spa

Design by Ramos & Bassols.

## Ceiling Wall



5975 p. 39




5977 p. 39




5979 p. 39


### 5975

1 x LED STRIP 10,8 W 600 mA.   
 LED 2700 K. 1560 lm. 144 lm/W.  
 LED 3500 K. 1920 lm. 178 lm/W.  
 Driver Constant Current 600 mA. 220~240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 1,6 Kg.


5975 11 Black (NCS S 8500-N) 

5975 23 Warm White (NCS S 0502-Y50R) 

5975 25 Beige D1 (NCS S 4005-Y50R) 

      Dimmer


### 5977

1 x LED STRIP 21,6 W 600 mA.   
 LED 2700 K. CRI >90. 2560 lm. 119 lm/W.  
 LED 3500 K. CRI >90. 3360 lm. 156 lm/W.  
 Driver Constant Current 600 mA. 220~240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 2,6 Kg.


5977 11 Black (NCS S 8500-N) 

5977 23 Warm White (NCS S 0502-Y50R) 


5977 25 Beige D1 (NCS S 4005-Y50R) 

      Dimmer


### 5979

1 x LED STRIP 32,4 W 600 mA.   
 LED 2700 K. CRI >90. 3840 lm. 119 lm/W.  
 LED 3500 K. CRI >90. 5040 lm. 156 lm/W.  
 Driver Constant Current 600 mA. 220~240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 3,6 Kg.


5979 11 Black (NCS S 8500-N) 

5979 23 Warm White (NCS S 0502-Y50R) 

5979 25 Beige D1 (NCS S 4005-Y50R) 

      Dimmer

Ceiling Wall

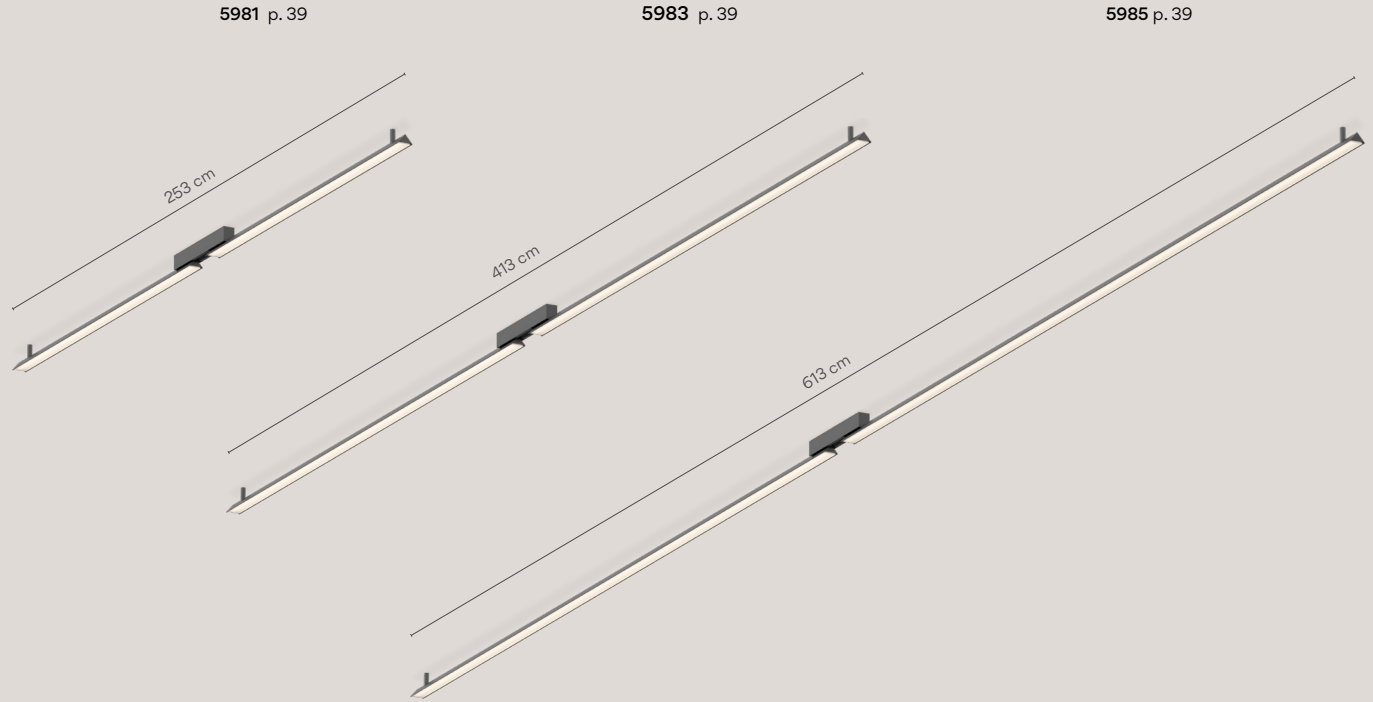

**5981**  
 2 x LED STRIP 10,8 W 600 mA.   
 LED 2700 K. CRI >90. 3120 lm. 144 lm/W.  
 LED 3500 K. CRI >90. 3840 lm. 178 lm/W.  
 Driver Constant Current 600 mA. 220~240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 2,8 Kg.

**5981 11** Black (NCS S 8500-N)

**5981 23** Warm White (NCS S 0502-Y50R)

**5981 25** Beige D1 (NCS S 4005-Y50R)

**5983**  
 2 x LED STRIP 21,6 W 600 mA.   
 LED 2700 K. CRI >90. 5120 lm. 119 lm/W.  
 LED 3500 K. CRI >90. 6720 lm. 156 lm/W.  
 Driver Constant Current 1200 mA. 220~240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 4,8 Kg.

**5983 11** Black (NCS S 8500-N)

**5983 23** Warm White (NCS S 0502-Y50R)

**5983 25** Beige D1 (NCS S 4005-Y50R)

**5985**  
 2 x LED STRIP 32,4 W 600 mA.   
 LED 2700 K. CRI >90. 7680 lm. 119 lm/W.  
 LED 3500 K. CRI >90. 10080 lm. 156 lm/W.  
 Driver Constant Current 600 mA.  
 220~240V. 50/60Hz.  
**Control:**  
 DALI (Remote),  
 1-10V (Remote),  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 6,9 Kg.


**5985 11** Black (NCS S 8500-N)

**5985 23** Warm White (NCS S 0502-Y50R)

**5985 25** Beige D1 (NCS S 4005-Y50R)




Wall Vanity light






5987 p. 38






5989 p. 38


5991 p. 38

**5987**  
 1 x LED STRIP 10,8 W 600 mA.   
 LED 2700 K. CRI >90. 1560 lm. 144 lm/W.  
 LED 3500 K. CRI >90. 1920 lm. 178 lm/W.  
 Driver Constant Current 600 mA. 220-240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).




Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 1,6 Kg.






- 5987 11 Black (NCS S 8500-N) 
- 5987 23 Warm White (NCS S 0502-Y50R) 
- 5987 25 Beige D1 (NCS S 4005-Y50R) 


    

**5989**  
 1 x LED STRIP 21,6 W 600 mA.   
 LED 2700 K. CRI >90. 2560 lm. 119 lm/W.  
 LED 3500 K. CRI >90. 3360 lm. 156 lm/W.  
 Driver Constant Current 600 mA. 220-240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).




Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 2,6 Kg.

- 5989 11 Black (NCS S 8500-N) 
- 5989 23 Warm White (NCS S 0502-Y50R) 
- 5989 25 Beige D1 (NCS S 4005-Y50R) 


**5991**  
 1 x LED STRIP 32,4 W 600 mA.   
 LED 2700 K. CRI >90. 3840 lm. 119 lm/W.  
 LED 3500 K. CRI >90. 5040 lm. 156 lm/W.  
 Driver Constant Current 600 mA. 220-240V. 50/60Hz.  
**Control:**  
 DALI,  
 1-10V,  
 Casambi (Remote).

Profile: Aluminum.  
 Diffuser: PMMA & Silicone.  
 Canopy: Aluminum.  
 Net weight 3,6 Kg.

- 5991 11 Black (NCS S 8500-N) 
- 5991 23 Warm White (NCS S 0502-Y50R) 
- 5991 25 Beige D1 (NCS S 4005-Y50R) 

## Vertical wall



5993 p. 39



5995 p. 39

**5993**

1 x LED STRIP 10,8W 600 mA.

LED 2700 K. 3500 lm. 144 lm/W.

LED 3500 K. 1920 lm. 178 lm/W.

Driver Constant Current 600 mA. 220~240V. 50/60Hz.

**Control:**

DALI,

1-10V,

Casambi (Remote).

Profile: Aluminum.

Diffuser: PMMA &amp; Silicone.

Canopy: Aluminum.

Net weight 1,6 Kg.

5993 11 Black (NCS S 8500-N)

5993 23 Warm White (NCS S 0502-Y50R)

5993 25 Beige D1 (NCS S 4005-Y50R)

**5995**

1 x LED STRIP 21,6 W 600 mA.

LED 2700 K. CRI &gt;90. 2560 lm. 119 lm/W.

LED 3500 K. CRI &gt;90. 3360 lm. 156 lm/W.

Driver Constant Current 600 mA. 220~240V. 50/60Hz.

**Control:**

DALI,

1-10V,

Casambi (Remote).

Profile: Aluminum.

Diffuser: PMMA &amp; Silicone.

Canopy: Aluminum.

Net weight 2,6 Kg.

5995 11 Black (NCS S 8500-N)

5995 23 Warm White (NCS S 0502-Y50R)

5995 25 Beige D1 (NCS S 4005-Y50R)

## ACKNOWLEDGEMENTS

Nacho Carbó  
Photography: Mariela Apollonio  
(page 9, 72, 113)

Fieldwork Design  
Photography: Jeremy Bittermann / JBSA  
(page 12, 84, 92)

Architecture: Ideo Arquitectura  
Photography: Salva López  
(page 76)

Architecture: Unterlandstättner Architekten  
[www.u-architekten.de](http://www.u-architekten.de)  
Photography: Michael Heinrich  
(page 97)

Architecture: Balzar Arquitectos  
(page 108)

Bernadí Hub  
[www.bernadi.es](http://www.bernadi.es)

Carles Enrich Studio

The content of this catalogue may be changed  
or cancelled at the discretion of the VIBIA  
management without prior notice.

Vibia Lighting, S.L.U.

Spain & Portugal T. +34 934 796 970  
International T. +34 934 796 971  
[hello@vibia.com](mailto:hello@vibia.com)  
[www.vibia.com](http://www.vibia.com)



