

Flat, Sticks, Top

VIBIA

Sticks

Design by Arik Levy.

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

GET THE CATALOGUE AT HOME

















GET THE CATALOGUE AT HOME

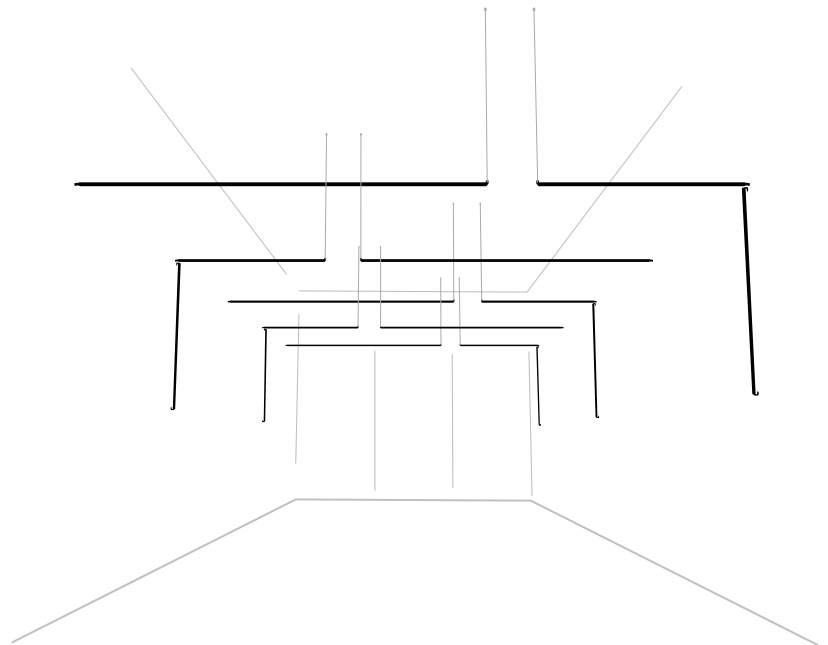



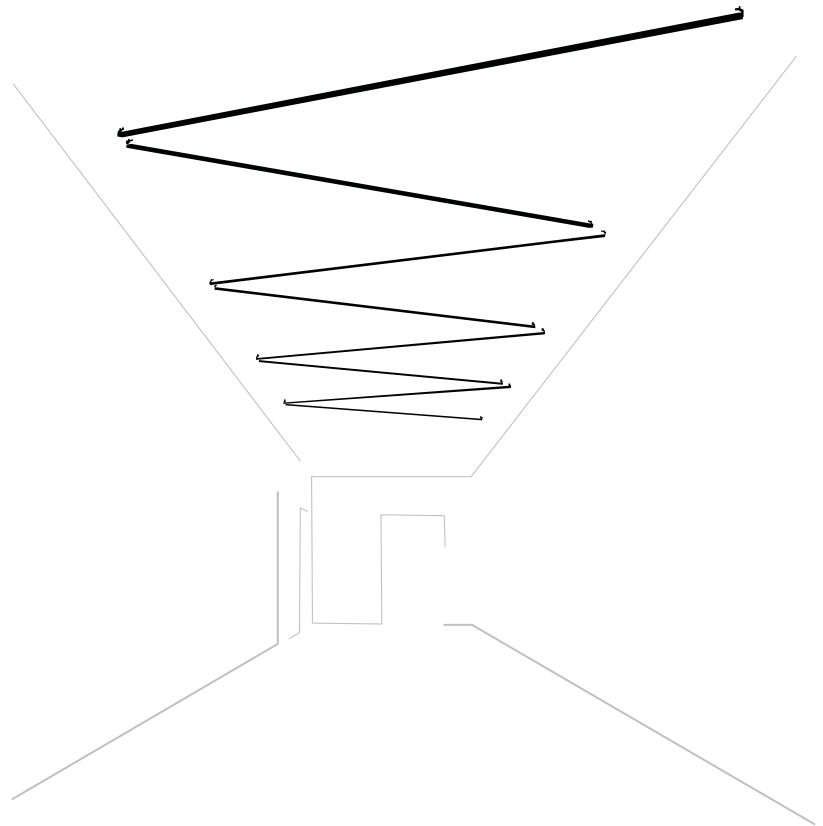



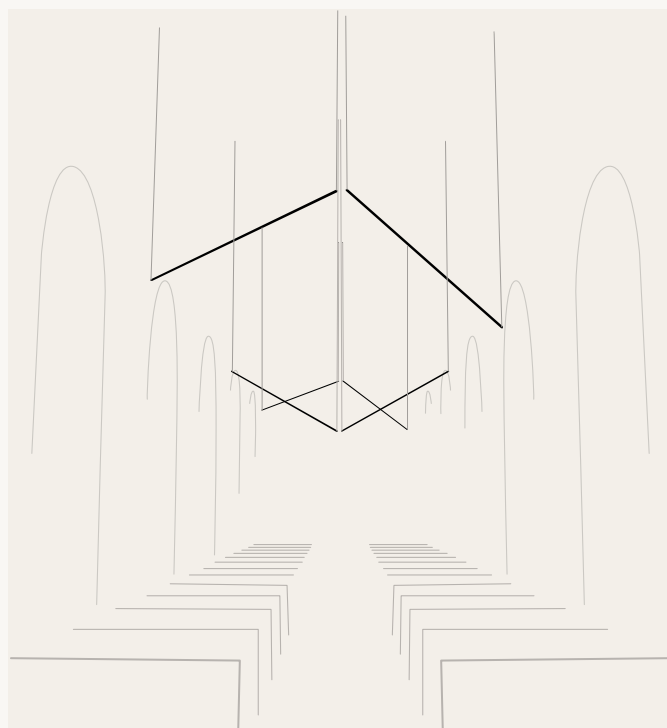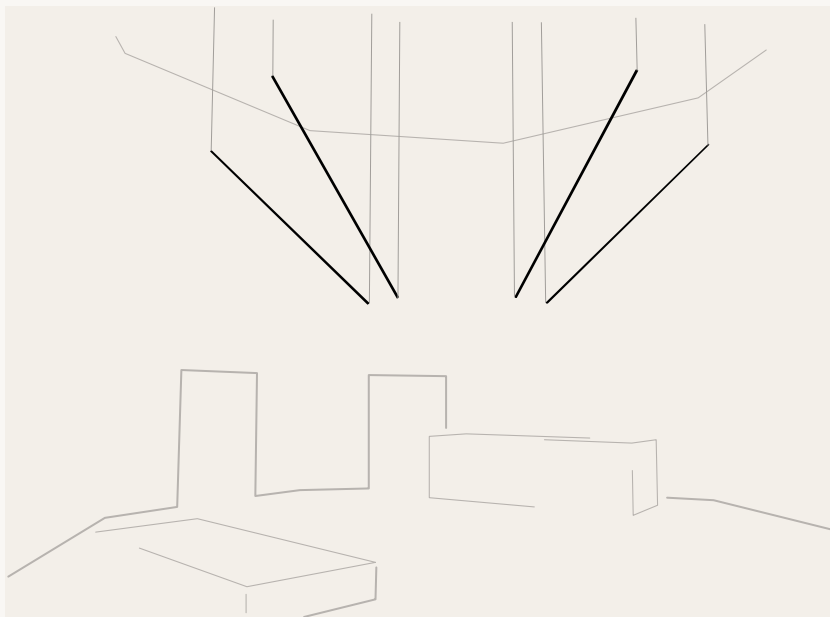



GET THE CATALOGUE AT HOME












Horizontal pendant version
with a UGR index <19 available

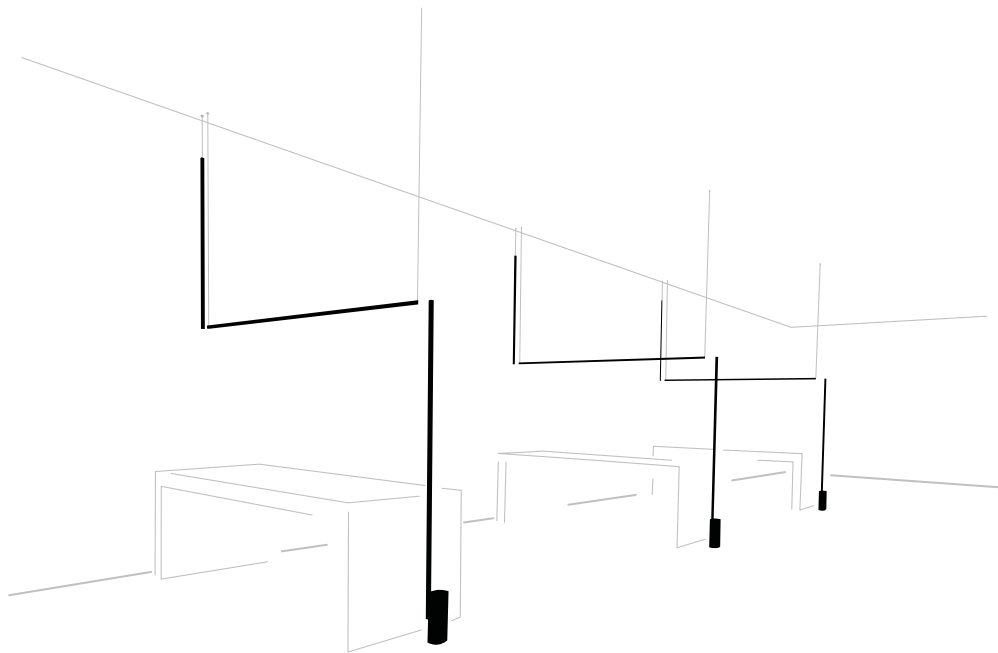

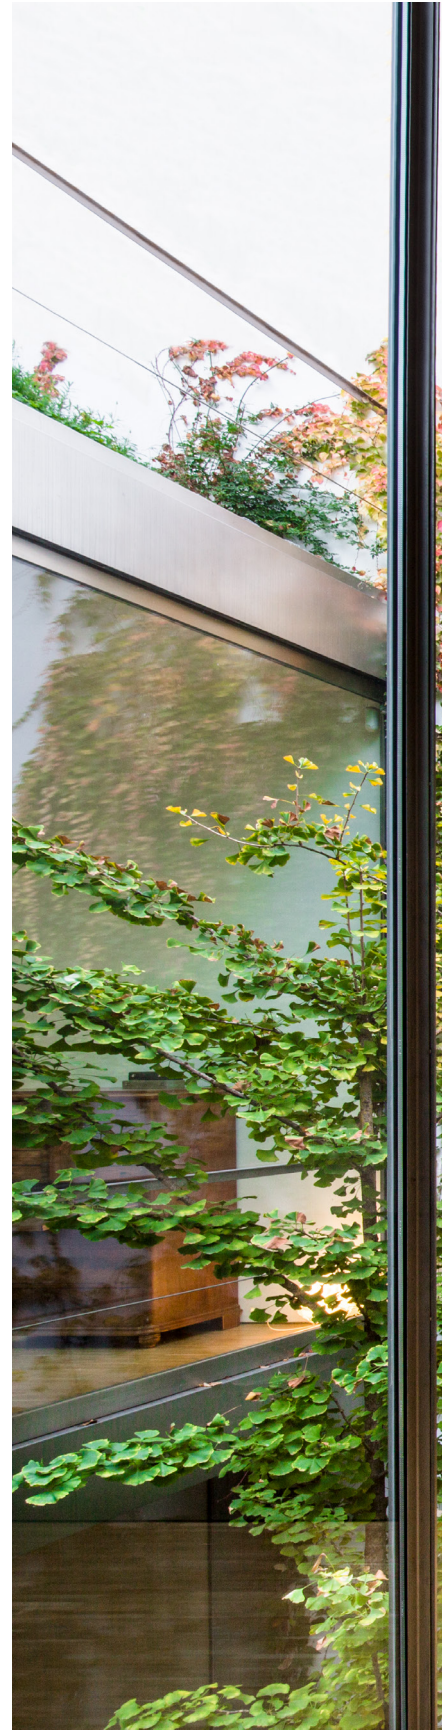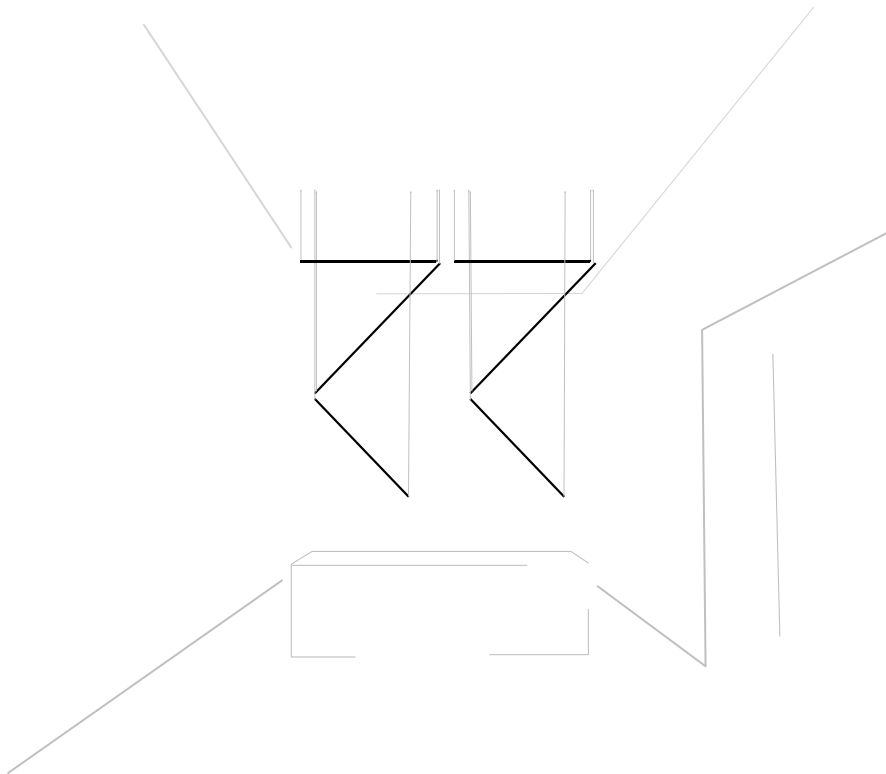






GET THE CATALOGUE AT HOME






“The professionals see the space differently from others. Sticks become their **Lighting Toolkit** to create whatever they think is correct because they know the space they are working on”.

Arik Levy

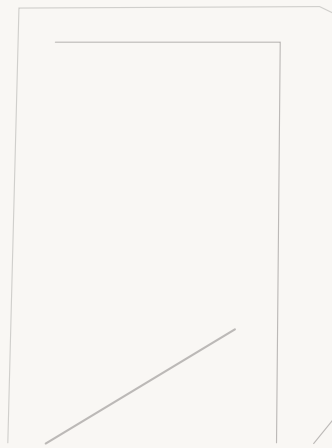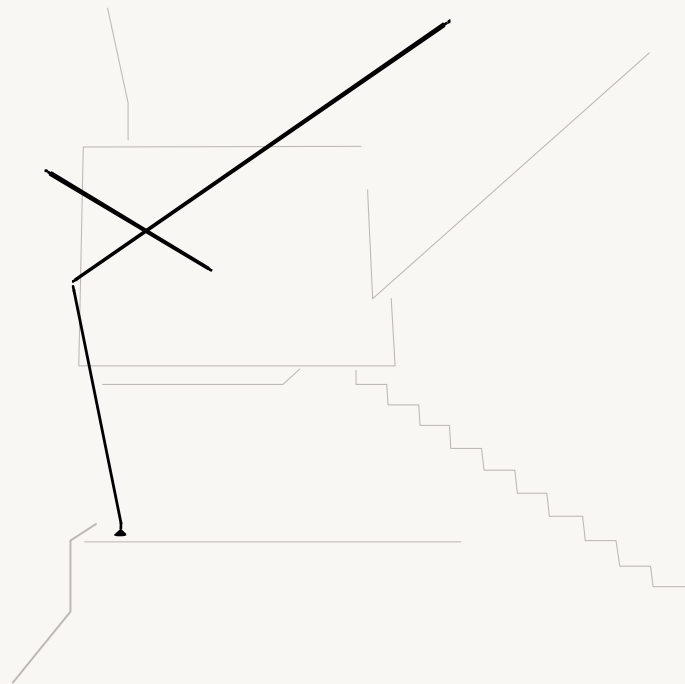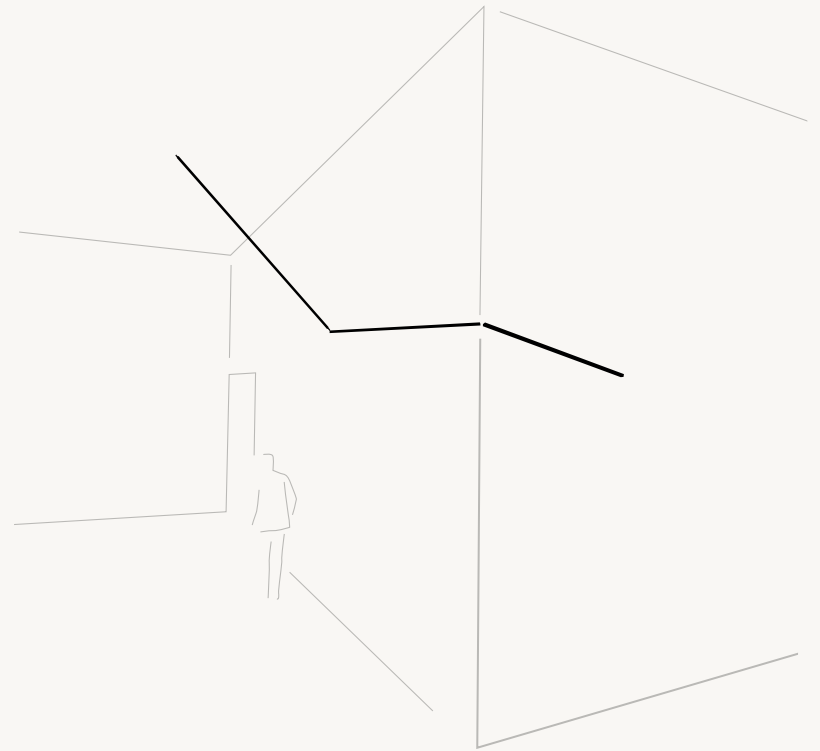

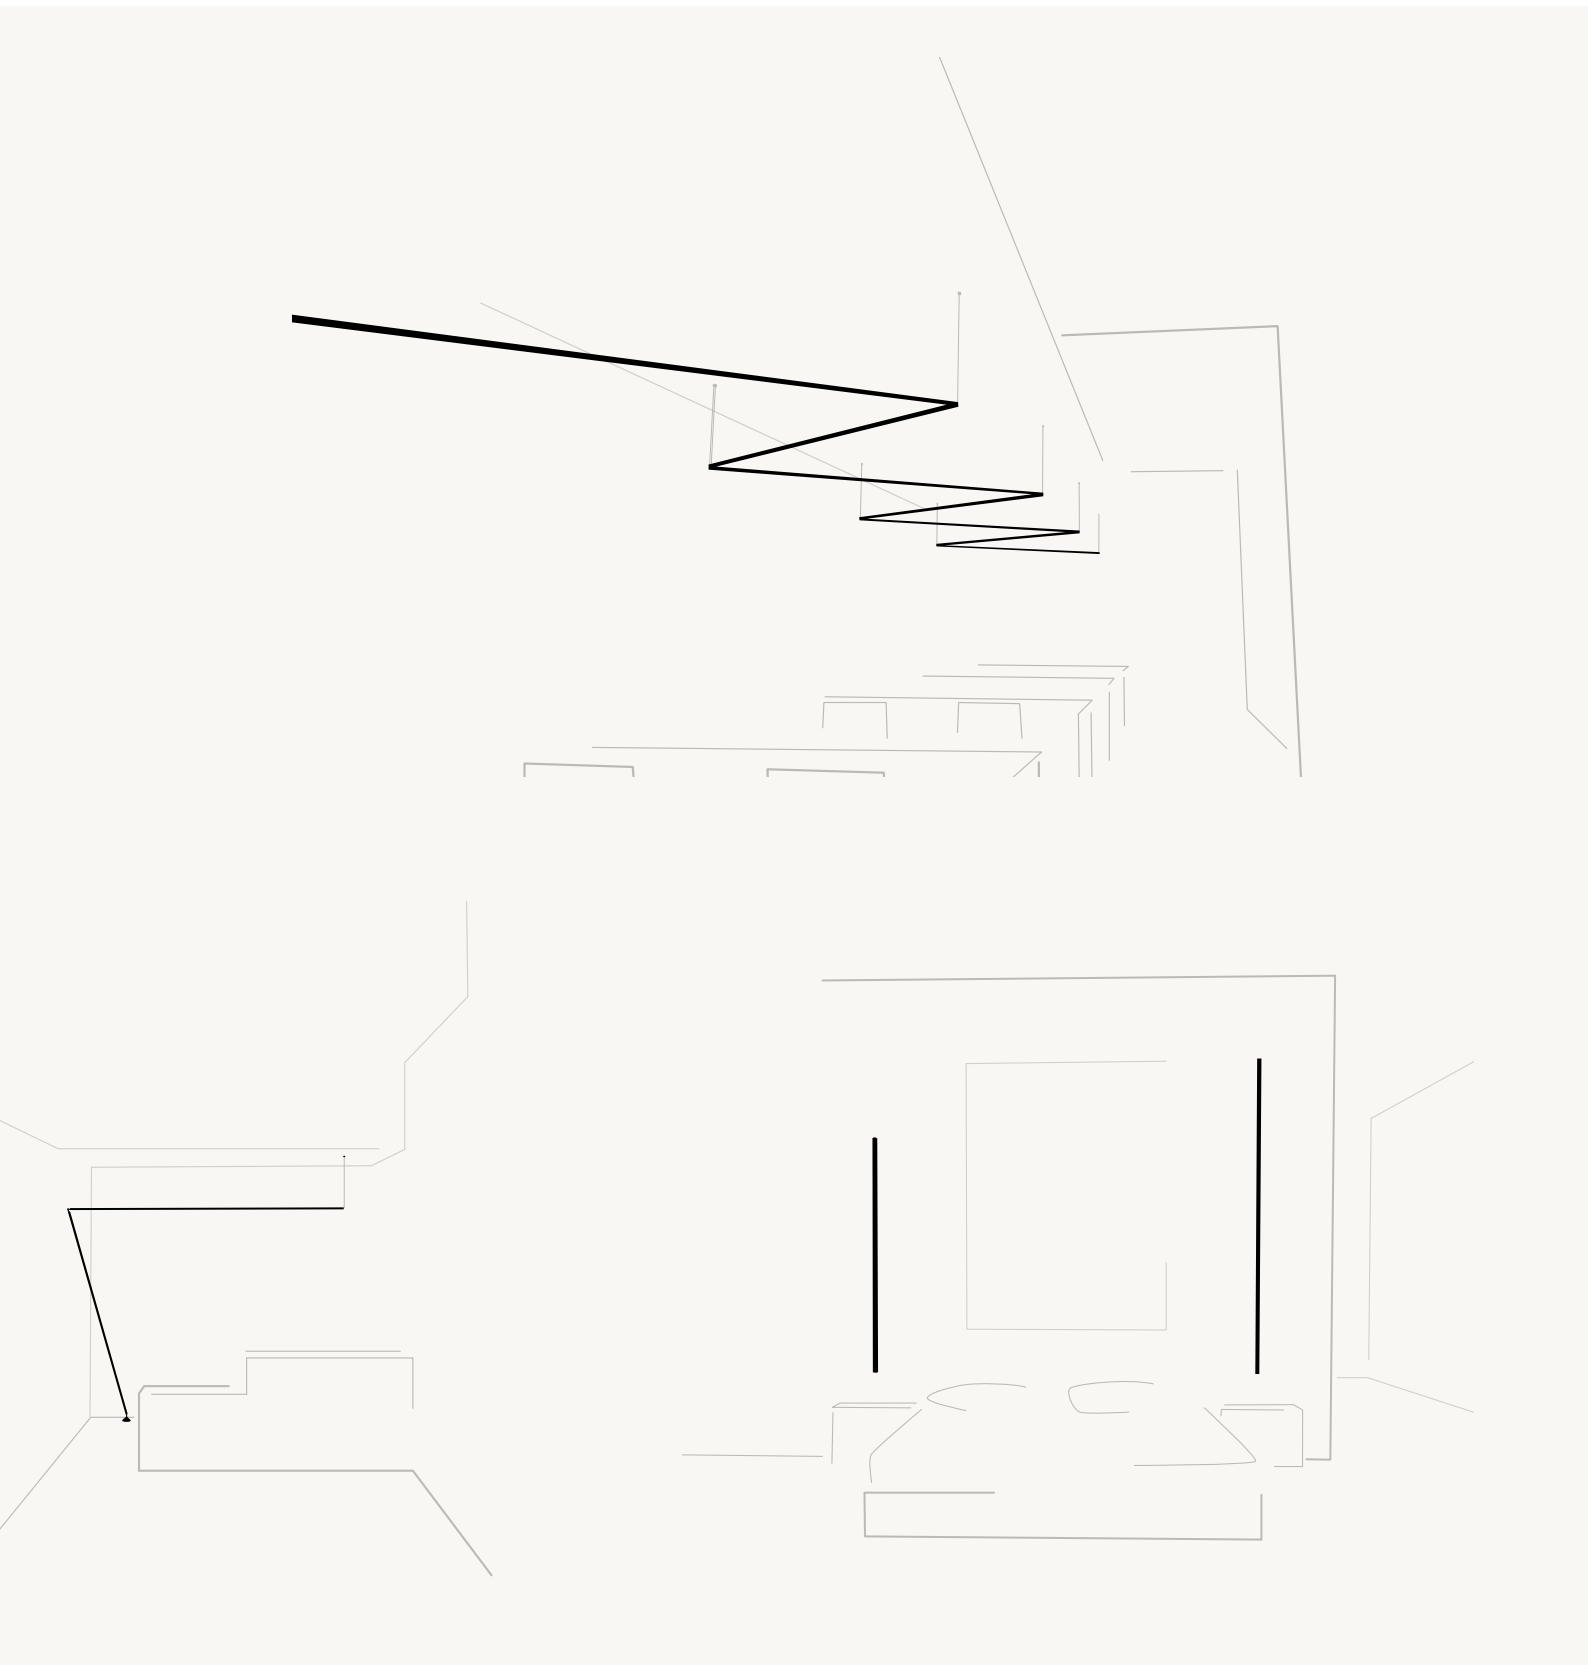





GET THE CATALOGUE AT HOME

One solution for every space

You can create your own layout adding connectable sticks or stand-alone model to your composition.

● 11 Black (NCS S 8500-N)

Sticks: Aluminum.
Diffuser: Polycarbonate.

LED 2700 K / 4000 K. CRI>90


Dimming:
Floor base & plug: Push.
Surface canopy,
Built-in: 1-10V.

Ref. 7338, 7339 and 7348
Dimming: Push.

Personalization options available

- Configuration layout at vibia.com
 - LED 3000 K
 - Dimming: DALI, Casambi.
Surface canopy, Built-in.
 - Extra cable length: Pendant sticks
- Request more information.

Stand-alone
Floor

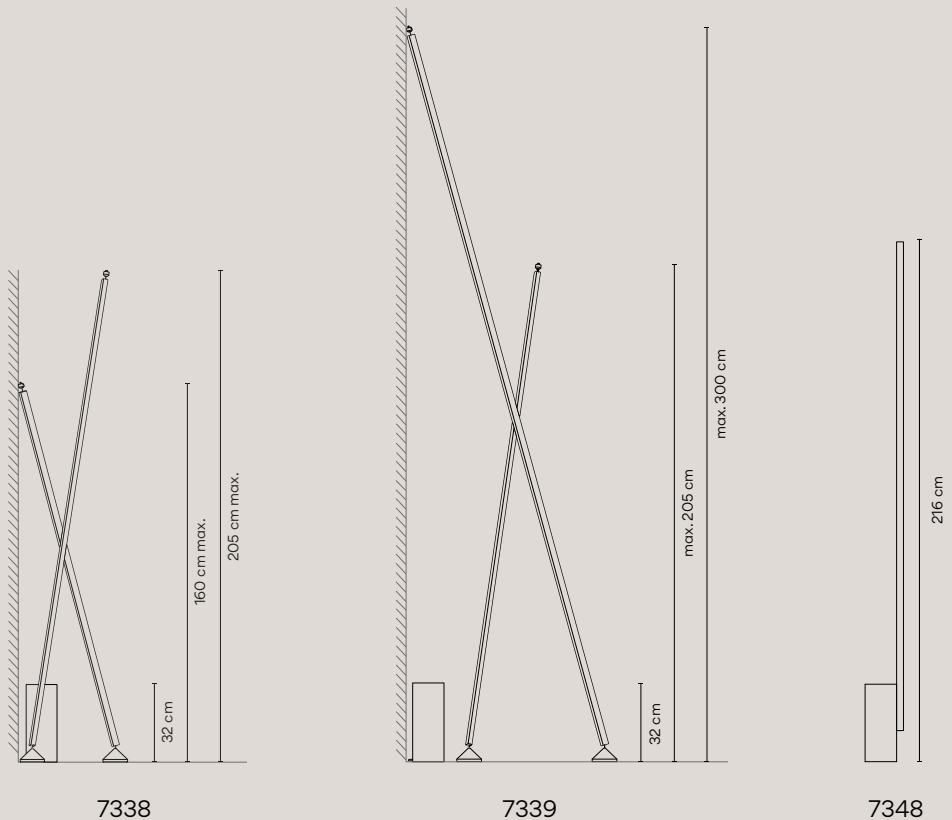

Connecting space application

Custom configurations include ceiling-to-ceiling, wall-to-wall, floor-to-wall, wall-to-ceiling, or suspended from the ceiling into open space. Through their physical form and the light they cast, they create and disrupt architectural planes.


Connectable

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m, and they can be connected one to each other to a total maximum length of 6.5 meters per electrical connection.


1.5 m

2 m

3 m

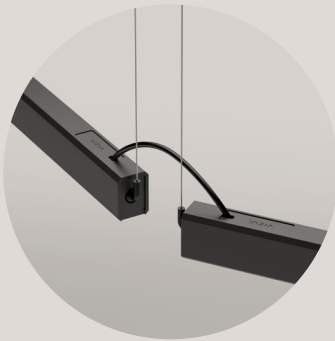


Sticks are connected one to each other with a 15 cm length cord.



Each stick rotates on its own axis, allowing light to be directed precisely where needed.

Floor


Floor-to-Wall
Stand-alone



+

Ceiling / Wall


Ceiling-to-Ceiling
Wall-to-Wall
Wall-to-Wall (corner)
Wall-to-Ceiling

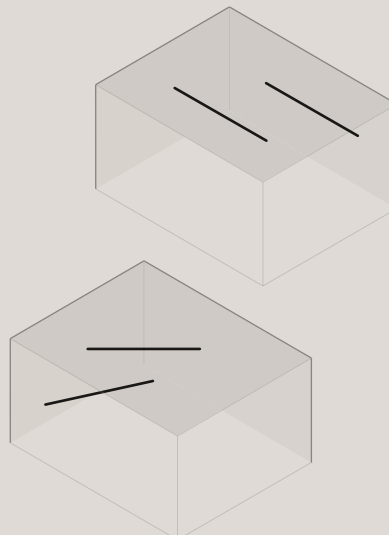

+

Pendants

Wall-to-Pendant
Ceiling-to-Pendant
Vertical






Create your own composition easy and quick at vibia.com selecting the option that best fits your needs.

A


Choose among pre-designed layouts based in multiple applications and spaces.

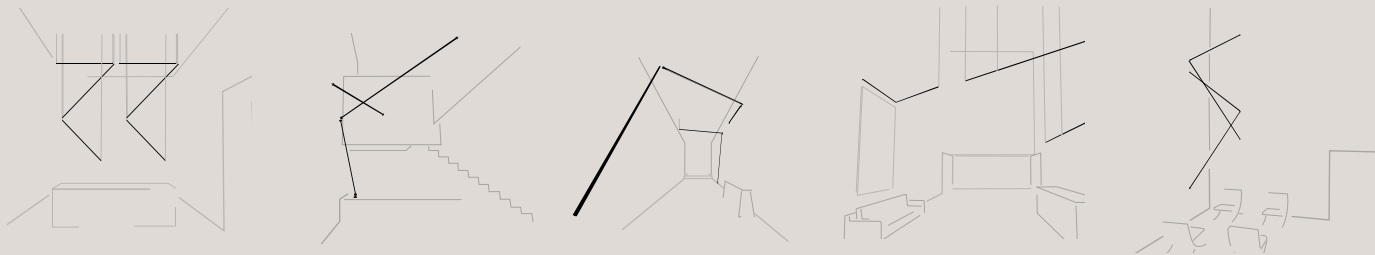

B

Adjust a pre-designed layout to your project by modifying:

- + Length of the sticks.
- + Position of each stick in the space.
- + Color temperature and dimming.
- + Installation type.

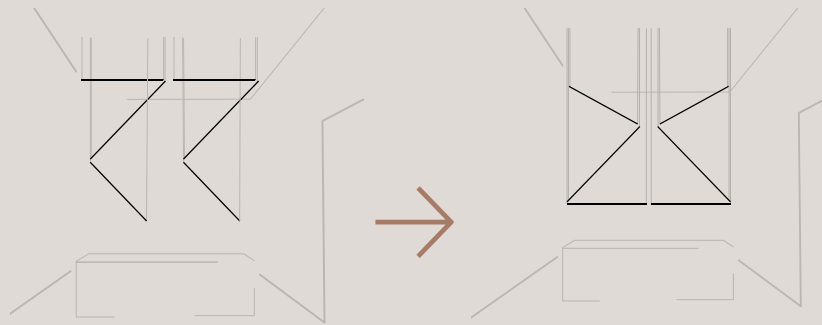

C

Create your connectable Sticks configuration from scratch in three easy steps, without sketches.

1

Choose the location for your electrical connection point



2

Add connectable Sticks up to 6.5 meters



3

Configure

- + Color temperature
- + Dimming control
- + Installation type
- + Pendant height




Sticks

Design by Arik Levy.

Lighting Toolkit

Wall-Wall / Ceiling-Ceiling


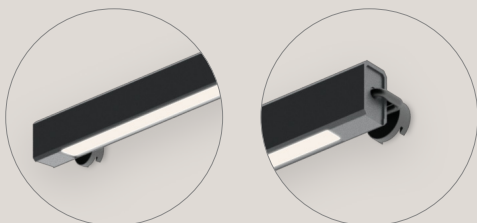


Stick 152 cm
7300 p. 71

Stick 201 cm
7303 p. 71

Stick 300 cm
7306 p. 71

Wall-Wall (corner) / Wall-Ceiling

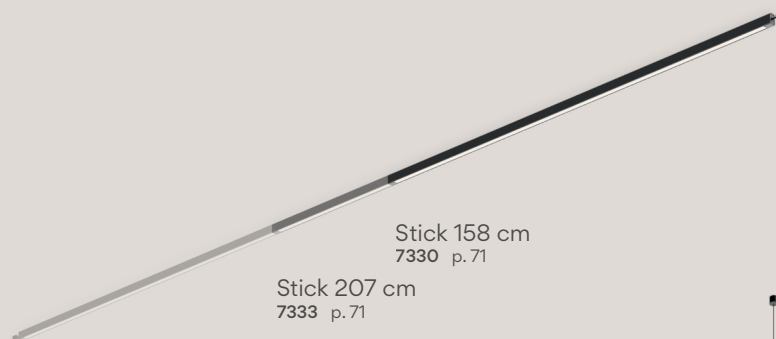
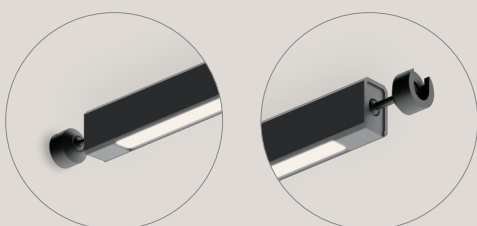


Stick 158 cm
7330 p. 71

Stick 207 cm
7333 p. 71

Stick 306 cm
7336 p. 71

Wall-Pendant

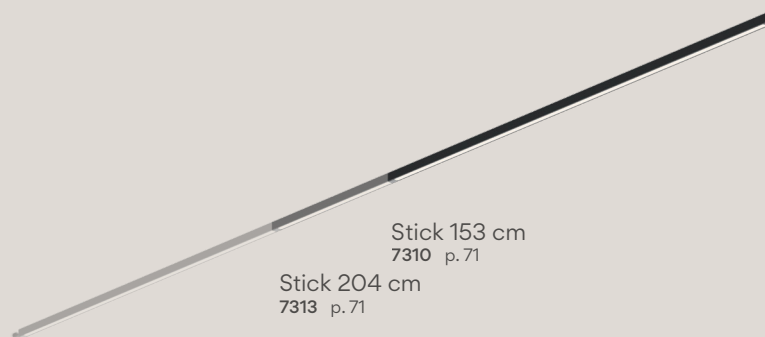
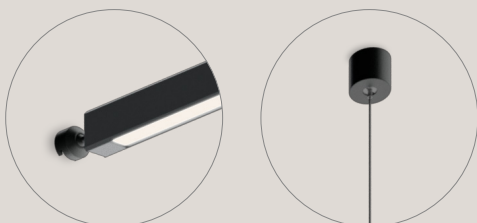


Stick 153 cm
7310 p. 71


Stick 204 cm
7313 p. 71

Stick 303 cm
7316 p. 71



Pendant-Pendant

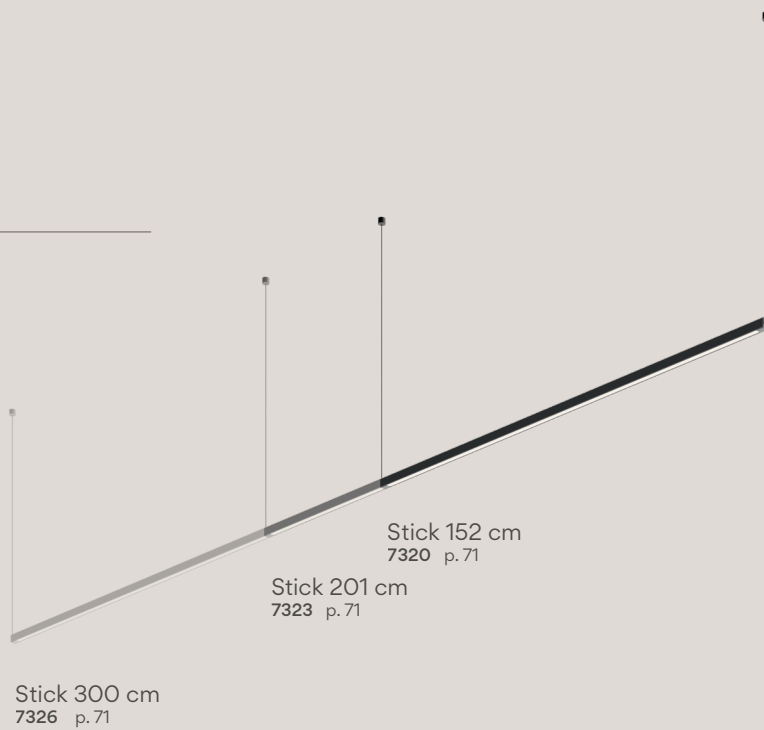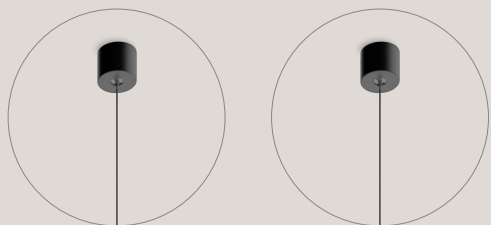

Pendant



Floor-Wall

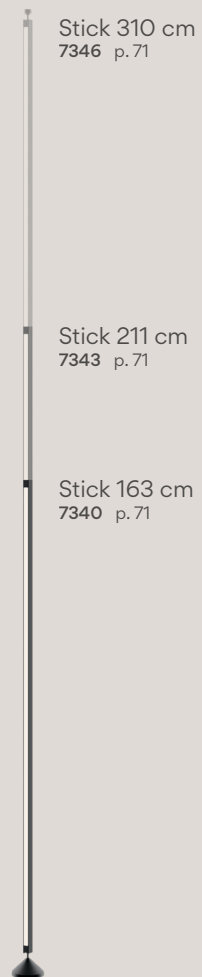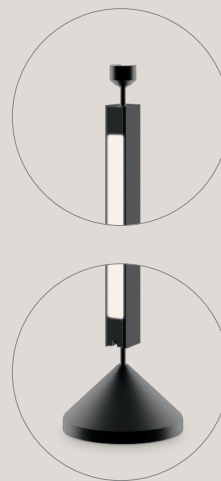

Wall-Wall / Ceiling-Ceiling
 Wall-Wall (corner) / Wall-Ceiling
 Wall-Pendant
 Ceiling-Pendant
 Pendant-Pendant
 Pendant

Sticks 1,5 m.

7300 7310 7320 7330 7350

1 x LED STRIP 26,4 W 24V.

/1 M 2700 K. CRI >90. 3260 lm. 123 lm/W.

/4 M 4000 K. CRI >90. 3561 lm. 134 lm/W.

Net Weight 0,9 Kg.

Sticks 2 m.

7303 7313 7323 7333 7353

1 x LED STRIP 35,2 W 24V.

/1 M 2700 K. CRI >90. 4346 lm. 123 lm/W.

/4 M 4000 K. CRI >90. 4748 lm. 134 lm/W.

Net Weight 1,2 Kg.

Sticks 3 m.

7306 7316 7326 7336 7356

1 x LED STRIP 52,8 W 24V.

/1 M 2700 K. CRI >90. 6519 lm. 123 lm/W.

/4 M 4000 K. CRI >90. 7122 lm. 134 lm/W.

Net Weight 1,8 Kg.

Sticks: Aluminum.

Diffuser: Polycarbonate.

Driver and Dimming depends on selected installation accessory (see page 99).

Suspension cables up to 3m. for (Wall - Pendant) and (Pendant-Pendant).

Personalization options available






- LED 3000 K.

- Extra cable length for (Wall-Pendant) and (Pendant Pendant).

Request more information.

11 /1 M Black (NCS S 8500-N)

11 /4 M Black (NCS S 8500-N)

Floor-Wall

Sticks 1,5 m.

7340

1 x LED STRIP 26,4 W 24V.

/1 M 2700 K. CRI >90. 3260 lm. 123 lm/W.

/4 M 4000 K. CRI >90. 3561 lm. 134 lm/W.

Net Weight 1,5 Kg.

Sticks 2 m.

7343

1 x LED STRIP 35,2 W 24V.

/1 M 2700 K. CRI >90. 4346 lm. 123 lm/W.

/4 M 4000 K. CRI >90. 4748 lm. 134 lm/W.

Net Weight 1,8 Kg.

Sticks 3 m.

7346

1 x LED STRIP 52,8 W 24V.

/1 M 2700 K. CRI >90. 6519 lm. 123 lm/W.

/4 M 4000 K. CRI >90. 7122 lm. 134 lm/W.

Net Weight 2,4 Kg

Sticks: Aluminum.

Diffuser: Polycarbonate.


Driver and Dimming depends on selected installation accessory (see page 99).**Personalization options available**




- LED 3000 K.

Request more information.

11 /1 M Black (NCS S 8500-N)

11 /4 M Black (NCS S 8500-N)








Installation types



Floor base & plug

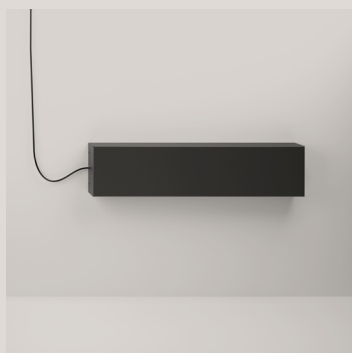ø 13x32 cm



Surface canopy

40x4x10 cm



Built-in disc S

ø 12x6 cm



Remote driver Built-in Micro

ø 4x7 cm

Floor base & plug

ACST000001 ACST000002

Driver Constant Voltage 24V. 200-240V. 50/60Hz.

Dimming: Push.

Body: Steel.

Net Weight 7 Kg.

11 Black (NCS S 8500-N)

**Surface canopy**

ACST000003 ACST000004

Driver Constant Voltage 24V. 90-305V. 50/60Hz.

Dimming: 1-10V.

Personalization options available

- Dimming: DALI, Casambi.

Request more information.

Body: Steel.

Net Weight 2,5

11 Black (NCS S 8500-N)

**Built-in disc S**

ACST000005 ACST000006

Driver Constant Voltage 24V. 90-305V. 50/60Hz.

Dimming: 1-10V.

Personalization options available

- Dimming: DALI, Casambi.

Request more information.

Body: Steel.

Net Weight 1,5

11 Black (NCS S 8500-N)

**Remote driver Built-in Micro**

ACST000007 ACST000008

Driver Constant Voltage 24V. 90-305V. 50/60Hz.

Dimming: 1-10V.

Personalization options available

- Dimming: DALI, Casambi.

Request more information.

Body: Aluminum.


Net Weight 1,5

11 Black (NCS S 8500-N)



Stand-alone

Floor

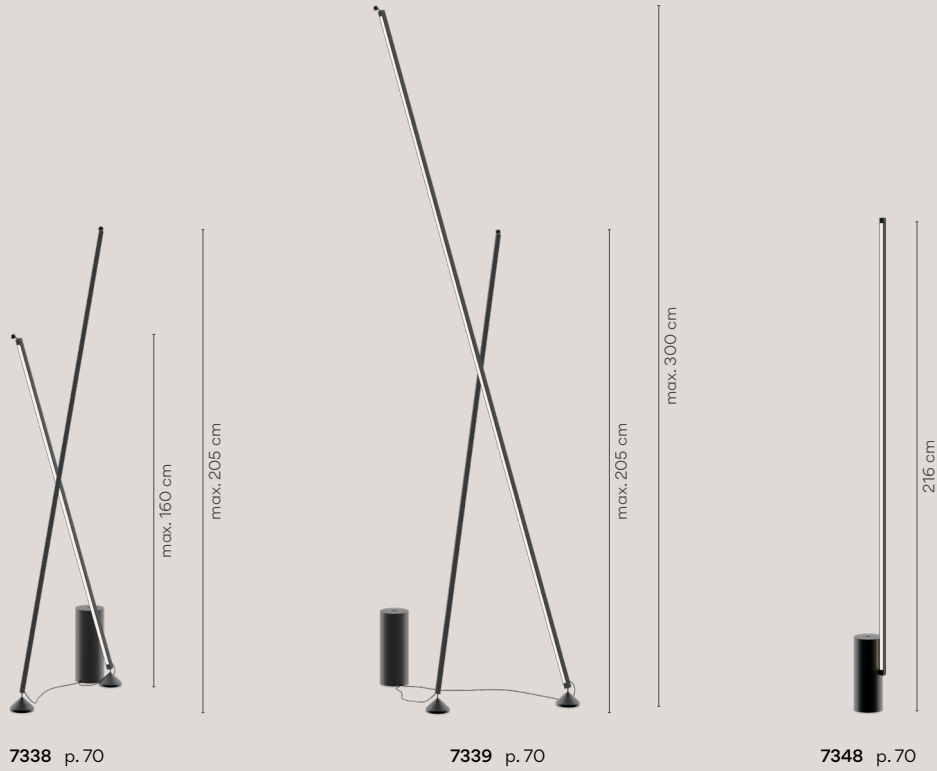

7338
 1 x LED STRIP 26,4 W 24V.
 1 x LED STRIP 35,2 W 24V.
 /15 2700 K. CRI >90. 7606 lm. 123 lm/W.
 /45 4000 K. CRI >90. 8309 lm. 134 lm/W.
 Driver Constant Voltage 24V. 200-240V. 50/60Hz
 Dimming: Push.

Personalization options available
 - LED 3000 K.
 Request more information.

Sticks: Aluminum.
 Diffuser: Polycarbonate.
 Net Weight 9,1 Kg.

7338 11 /15 Black (NCS S 8500-N) ●
 7338 11 /45 Black (NCS S 8500-N) ●

LED IP20 CE Dimmer A+

7339
 1 x LED STRIP 35,2 W 24V.
 1 x LED STRIP 52,8 W 24V.
 /15 2700 K. CRI >90. 10865 lm. 123 lm/W.
 /45 4000 K. CRI >90. 11870 lm. 134 lm/W.
 Driver Constant Voltage 24V. 200-240V. 50/60Hz
 Dimming: Push.

Personalization options available
 - LED 3000 K.
 Request more information.

Sticks: Aluminum.
 Diffuser: Polycarbonate.
 Net Weight 10 Kg.

7339 11 /15 Black (NCS S 8500-N) ●
 7339 11 /45 Black (NCS S 8500-N) ●

LED IP20 CE Dimmer A+

7348
 1 x LED STRIP 35,2 W 24V.
 /15 2700 K. CRI >90. 4346 lm. 123 lm/W.
 /45 4000 K. CRI >90. 4748 lm. 134 lm/W.
 Driver Constant Voltage 24V. 200-240V. 50/60Hz
 Dimming: Push.

Personalization options available
 - LED 3000 K.
 Request more information.

Sticks: Aluminum.
 Diffuser: Polycarbonate.
 Net Weight 8,2 Kg.

7348 11 /15 Black (NCS S 8500-N) ●
 7348 11 /45 Black (NCS S 8500-N) ●

LED IP20 CE Dimmer A+

ACKNOWLEDGEMENTS

Project name: DTI Group - Office
Architecture & Interior Design: VEVS Amsterdam
(Rob van Sprang - Martijn d'Herripon)
Photography: Mike Bink
(page 10, 11)

© Pawel Chu
(page 21)

Marià Castelló
@mcastello_arch
(page 37, 47, 81, 86)

© Fran Silvestre Arquitectos
(page 49)

Photography: Toshiyuki Yano
(page 55)

© Reinhart Julian
(page 52)

MR.P Studios
(page 51)

The content of this catalogue may be changed
or cancelled at the discretion of the VIBIA
management without prior notice.

Vibia Lighting, S.L.U.

Spain & Portugal T. +34 934 796 970
International T. +34 934 796 971
vibia@vibialighting.com
www.vibia.com

