



BuzziMoon 220-240V

Product Specification Sheet

This document contains technical
information about the BuzziMoon Round
Suspended



www.buzzi.space

Embedded light

BuzziMoon offers the best of both worlds; highly functional general lighting embedded in a proven acoustic ceiling solution. One of the first acoustical lighting solutions that is equally performant on lighting as on acoustic level. The LED light module is designed specifically to answer the request of general lighting in office space. The Moon can be finished off in different fabrics and various 3D patterns. The LED module has an output of 2500 lumen at a colour temperature of 3000K.

The diffuser gives it a “full moon” lighting experience. BuzziMoon is equally available in EU and US.

Design by BuzziSpace Studio

General



Round Suspended

LED disk: Powder coated metal body

Opaque diffuser



Acoustic Panel: Honeycomb cardboard + MDF

CME35H foam filling

Upholstered in Fabric, Rough, Trevira CS+ | CS, Terra

Wattage: 29,4W

Input Voltage: 220 - 240V

Input Frequency: 50/60Hz

Lumen output: 2545 lumen



Colour Temperature: 3000K

Colour Rendering Index: 90

Unified glare rating: 22 (version with prismatic diffuser UGR 19 on request)

Efficacy: 87 Lm/W

Dimmable 1-10V Protocol



IP20 Dry usage

R-S Ø 80 cm



R-M Ø 100 cm

R-L Ø 120 cm



Flat, 3D Drop, 3D leaf, 3D Rib



Assembled

Certifications

CE/CB

Acoustics



Absorption




Diffusion

Content

Configurations	3	Fabrics	7
Composition	4	Dimensions	8
Patterns	5	Acoustics	9

Configurations

BuzziMoon Round Suspended

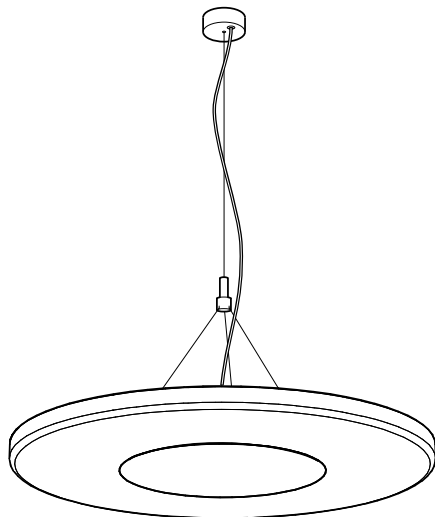

Downlight

LED disk integrated in an upholstered acoustic panel



3 silver metal suspension cables

White powder coated metal ceiling canopy

Transparent power cable

R-S Ø 80 cm



R-M Ø 100 cm

R-L Ø 120 cm



S: 9,5kg

M: 11,5kg

L: 13,5 kg



Flat, 3D Drop, 3D leaf, 3D Rib



If installing on suspended ceiling, verify load capacity prior to installation.


Composition

LED Disk



The LED disk has an aluminium frame which is finished in fine textured white powder coating. The PMMA diffuser ensures an optimal light spread and efficiency. It creates a very diffuse light surface without any dottiness. The light source of the buzzimoon is a LED PCB, containing 36 low power LED's.

To enlight your workplace or room with optimal lux levels take following measures into account.

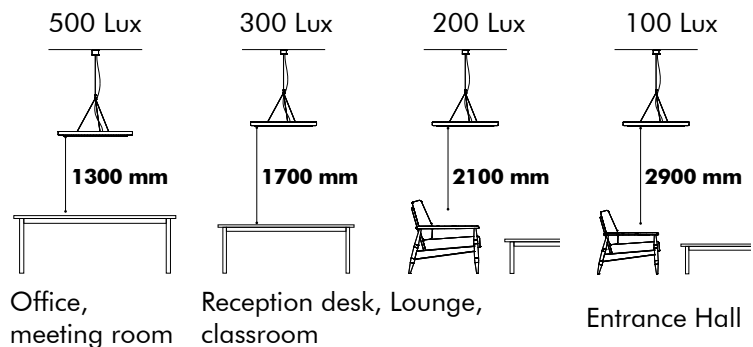

* According to EN12464


Suspension Set



Suspension set consists of a:

- metal ceiling canopy powder coated in white
- transparent power cable (length 4m)
- silver metal cables to suspend the BuzziMoon (length 4m)
- single silver metal cable exits the ceiling canopy and splits up into 3 metal cables to connect to the BuzziMoon

Acoustic Panel

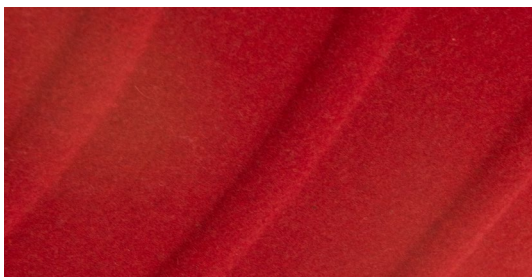


The acoustic panel is upholstered front to back in a chosen fabric. The panel consists of honeycomb cardboard, MDF and CME35H foam filling.


Patterns

Flat


L

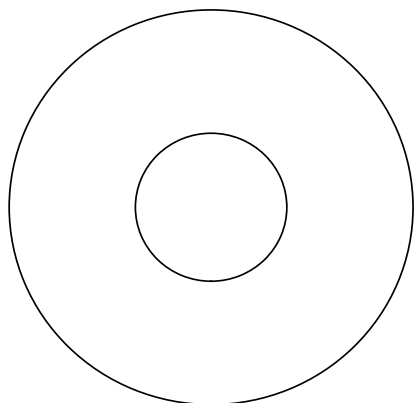

M




S




3D Drop


L

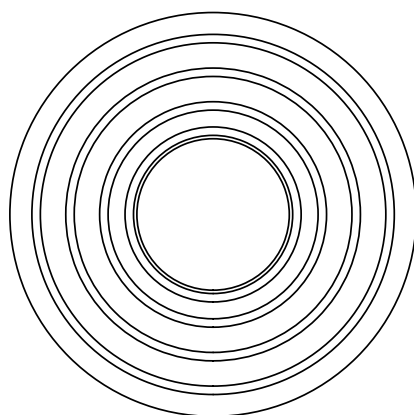

M




S




3D Leaf


L

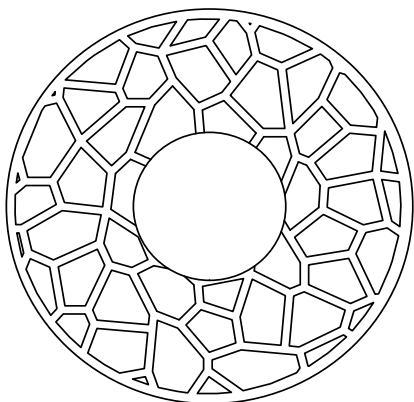

M




S




3D Rib


L

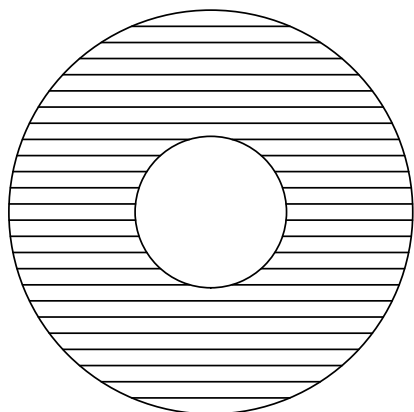

M




S




Dimensions

Acoustic Panel





L

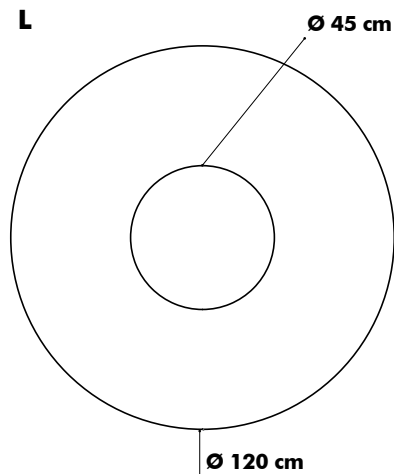


M

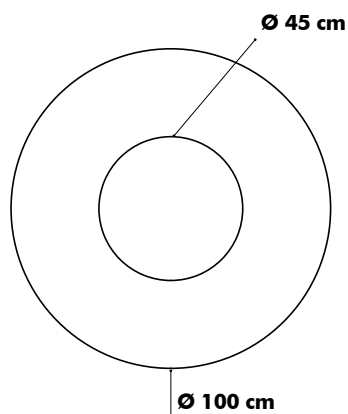

S

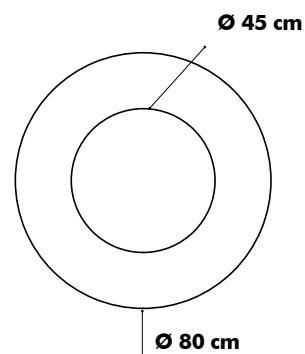


Suspension Set

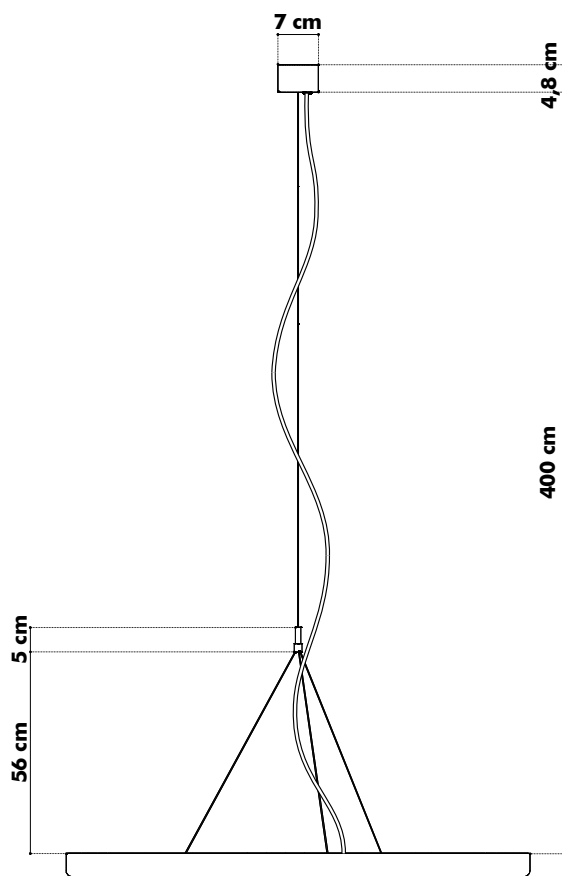

CAT A

FABRIC
ROUGH
TREVIRA CS+
TREVIRA CS
REVIVE 1
REVIVE 2

Fabric



FA-LightGrey
1000

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Width 148 cm | 58.27"
Thickness 0,8 mm | 0.031 inch
Abrasion resistance 40.000 Martindale, 50.000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA: 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5
Maintenance Vacuum clean regularly. Don't wash. Don't remove the
Fabric from the product. Treat spillages immediately. Professional dry clean
or wipe clean with a pH neutral soap and a damp cloth.



FA-Kiezel
7



FA-Ivory
101



FA-Naturel
1



FA-Beige
1037



FA-Dolphin
180



FA-Shitake
124




FA-DarkBrown
18




FA-Rust
29




FA-Taupe
1008




FA-Mint
50



FA-Azure
144




FA-Olive
53



FA-Army
14



FA-Zwart
1003



FA-MidGrey
1001



FA-Blue
45



FA-Petrol
56



FA-Purple
78



FA-Aubergine
74



FA-Prune
76



FA-Fuchsia
77




FA-Violet
72



FA-Navy
1007



FA-Indigo
90



FA-LightBlue
41



FA-Aqua
143



FA-OceanBlue
147



FA-Pistache
52



FA-Yellow
24



FA-Red
2011



FA-Fire
139



FA-Mandarin
129



FA-Orange
2012




FA-Pink
73

Note color deviation may occur.
Find the latest update of the material
specifications and colors on our
website: www.buzzi.space

Acoustics

BuzziMoon


Equivalent sound absorption area in m² per object

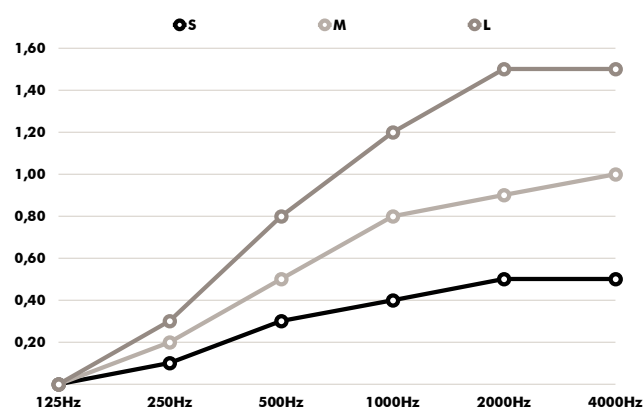

Hz	S Aeq/m²	M Aeq/m²	L Aeq/m²
125	0.0	0.0	0.0
250	0.1	0.2	0.3
500	0.3	0.5	0.8
1000	0.4	0.8	1.2
2000	0.5	0.9	1.5
4000	0.5	1	1.5

Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A

Fastness to light EU 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+ | CS



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
EN 1021/1-2
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Terra



Category B

Composition 100% Pure New Wool

Weight 370 g/m² | 10.91 oz/yd²

Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek

Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN 1021.2/2006 | USA: CAL TB 117

Fastness to light EU 5 | USA 5

Fastness to rubbing EU: Wet 4 | Dry 4

Fastness to crocking USA: Wet 4 | Dry 4

